Clock OSC

SG5032CCN

SG5032CCN 3.276800 MHz HJGA Product name Product Number / Ordering code

X1G0044710024xx

Please refer to the 8.Packing information about xx (last 2 digits)


Output waveform CMOS

Pb free / Complies with EU RoHS directive

Reference weight Typ. 52 mg

1.Absolute maximum ratings						
Parameter	Symbol	Min.	Тур.	Max.	Unit	Conditions / Remarks
Maximum supply voltage	Vcc-GND	-0.3	-	7	V	-
Storage temperature	T_stg	-40	-	125	°C	Storage as single product
Input voltage	Vin	-0.5	-	Vcc+0.5	V	OE terminal


2.Specifications(characteri	stics)					
Parameter	Symbol	Min.	Тур.	Max.	Unit	Conditions / Remarks
Output frequency	fO		3.2768		MHz	
Supply voltage	Vcc	4.5	5	5.5	V	-
Operating temperature	T_use	-40	-	85	°C	-
Frequency tolerance	f_tol	-50	-	50	x10 ⁻⁶	T_use
Current consumption	lcc	-	-	20	mA	No load condition
Stand-by current	I_std	-	-	-	μA	-
Disable current	I_dis	-	-	10.0	mA	OE = GND
Symmetry	SYM	40	-	60	%	50% Vcc Level L_CMOS=<50pF
Output voltage	V _{OH}	Vcc-0.4	-	-		-
	V _{OL}	-	-	0.4		-
Output load condition	L_CMOS	-	-	50	pF	CMOS Load
Input voltage	V _{IH}	0.8Vcc	-	-		OE terminal
	V _{IL}	-	-	0.2Vcc		OE terminal
Rise time	t _r	-	-	5	ns	0.2Vcc to 0.8Vcc Level, L_CMOS=50pF
Fall time	tf	-	-	5	ns	0.2Vcc to 0.8Vcc Level, L_CMOS=50pF
Start-up time	t_str	-	-	5	ms	t = 0 at 0.9Vcc
Jitter	t _{DJ}	-	TBD	-	ps	Deterministic Jitter
	T _{RJ}	-	TBD	-	ps	Random Jitter
	t _{RMS}	-	TBD	-	ps	δ(RMS of total distribution)
	t _{p-p}	-	TBD	-	ps	Peak to Peak
	t _{acc}	-	TBD	-	ps	Accumulated Jitter(δ) n=2 to 50000 cycles
Phase jitter	t _{PJ}	-	TBD	-	ps	Off set Frequency: 12kHz to 20MHz
Phase noise	L(f)	-	TBD	-	dBc/Hz	Off set 1Hz
		-	TBD	-	dBc/Hz	Off set 10Hz
		-	TBD	-	dBc/Hz	Off set 100Hz
		-	TBD	-	dBc/Hz	Off set 1kHz
		-	TBD	-	dBc/Hz	Off set 10kHz
		-	TBD	-	dBc/Hz	Off set 100kHz
		-	TBD	-	dBc/Hz	Off set 1MHz
Frequency aging	f_age	-5	-	5	x10 ⁻⁶	@+25°C first year
		-	-	-		-

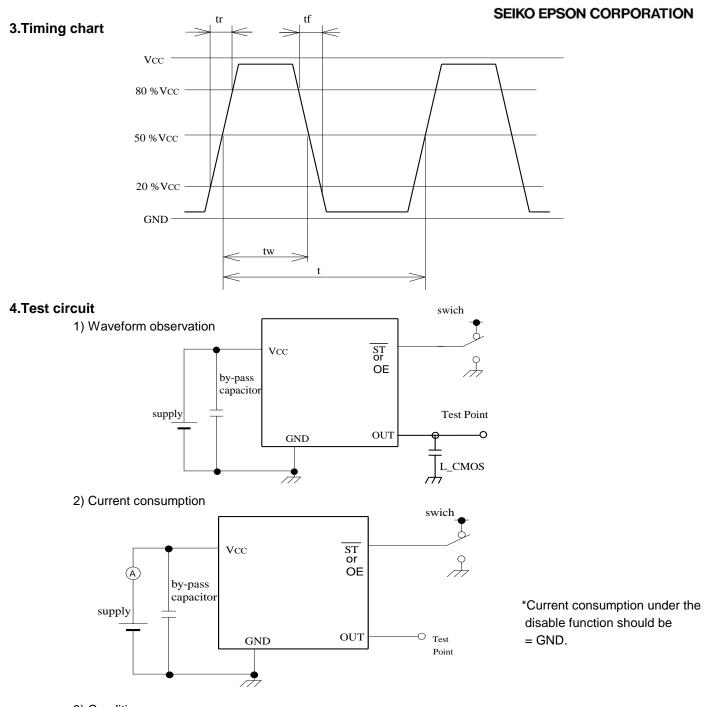


3) Condition

- (1) Oscilloscope
- · Band width should be minimum 5 times higher (wider) than measurement frequency.
- · Probe earth should be placed closely from test point and lead length should be as short as possible
- * Recommendable to use miniature socket. (Don't use earth lead.)
- (2) L_CMOS also includes probe capacitance.
- (3) By-pass capacitor (0.01 mF to 0.1 mF) is placed closely between VCC and GND.
- (4) Use the current meter whose internal impedance value is small.
- (5) Power supply
- \cdot Start up time (0 %VCC \circledast 90 %VCC) of power source should be more than 150 ms.
- \cdot Impedance of power supply should be as lowest as possible.

SEIKO EPSON CORPORATION

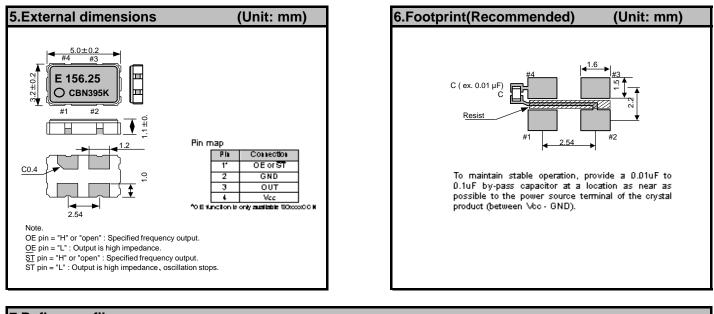


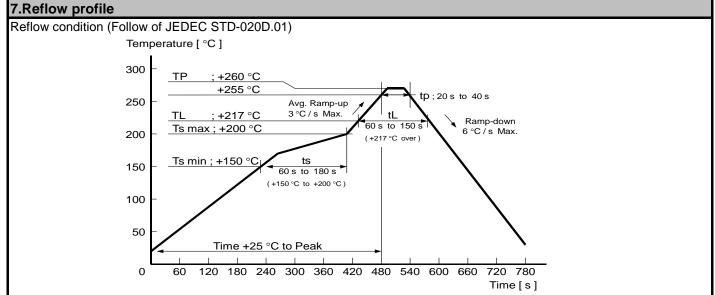

8.Packing information

[1]Produc	t number la	ast 2 digits code(xx) description		The recommended code is "00"
	X1G0044	710024xx		
	Code	Condition	Code	Condition
	01	Any Q'ty vinyl bag(Tape cut)	13	500pcs / Reel
	11	Any Q'ty / Reel	00	1000pcs / Reel
	12	250pcs / Reel		

SEIKO EPSON CORPORATION

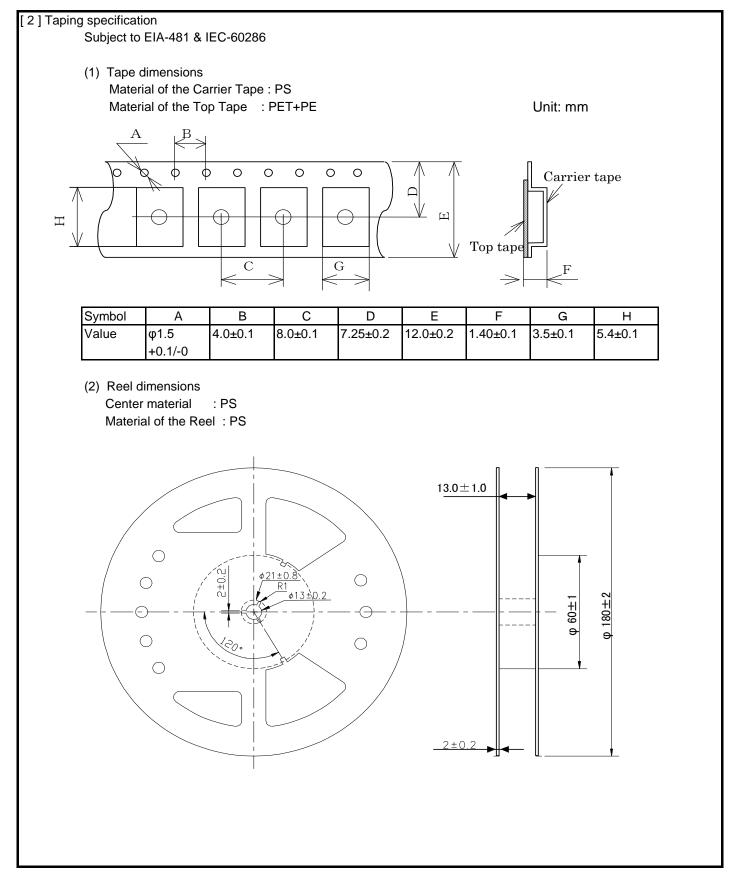

This material is subject to change without notice.	
Any part of this material may not be reproduced or duplicated i permission of Seiko Epson.	in any form or any means without the written
The information about applied data, circuitry, software, usage, reference only.	etc. written in this material is intended for
Seiko Epson does not assume any liability for the occurrence or copyright of a third party.	of customer damage or infringing on any patent
This material does not authorize the licensing for any patent of	or intellectual copyrights.
When exporting the products or technology described in this m	
export control laws and regulations and follow the procedures	required by such laws and regulations.
You are requested not to use the products (and any technical i	
and/or manufacture of weapon of mass destruction or for othe	r military purposes. You are also requested that
you	
would not make the products available to any third party who	may use the products for such prohibited
purposes.	and When weight there is an additional institute
These products are intended for general use in electronic equi	pment. When using them in specific applications
that require extremely high reliability, such as the applications stated below	w you must obtain permission from Seiko Epson
in advance.	w, you must obtain permission norm beiko Epson
/ Space equipment (artificial satellites, rockets, etc.)	
/ Transportation vehicles and related (automobiles, aircraft, t	rains, vessels, etc.)
/ Medical instruments to sustain life	,
/ Submarine transmitters	
/ Power stations and related	
/ Fire work equipment and security equipment	
/ Traffic control equipment	
/ And others requiring equivalent reliability.	

10.Contact us

http://www5.epsondevice.com/en/contact/