Clock OSC SG5032CCN

Product name SG5032CCN 18.700000 MHz HJGA
Product Number / Ordering code X1G0044710045xx

Please refer to the 8.Packing information about xx (last 2 digits)

Output waveform CMOS


Pb free / Complies with EU RoHS directive

Reference weight Typ. 52 mg

| 1.Absolute maximum ratings | | | | | | | | |
|----------------------------|---------|------|------|---------|------|---------------------------|--|--|
| Parameter | Symbol | Min. | Тур. | Max. | Unit | Conditions / Remarks | | |
| Maximum supply voltage | Vcc-GND | -0.3 | - | +7 | V | - | | |
| Storage temperature | T_stg | -40 | - | +125 | ٥C | Storage as single product | | |
| Input voltage | Vin | -0.5 | - | Vcc+0.5 | V | OE terminal | | |

| 2.Specifications(charac | teristics) | | | | | | |
|-------------------------|------------------|---------|-----------|--------|-------------------|-------------------------------------------|--|
| Parameter | Symbol | Min. | Тур. | Max. | Unit | Conditions / Remarks | |
| Output frequency | f0 | | 18.700000 | | MHz | | |
| Supply voltage | Vcc | 4.5 | 5 | 5.5 | V | - | |
| Operating temperature | T_use | -40 | - | +85 | °C | - | |
| requency tolerance | f_tol | -50 | - | 50 | x10 ⁻⁶ | T_use | |
| Current consumption | lcc | - | - | 20 | mA | No load condition | |
| Stand-by current | I_std | - | - | ı | μΑ | - | |
| Disable current | l_dis | • | - | 10.0 | mA | OE = GND | |
| Symmetry | SYM | 40 | - | 60 | % | 50% Vcc Level L_CMOS=<50pF | |
| Output voltage | V _{OH} | Vcc-0.4 | - | - | | - | |
| | V_{OL} | - | - | 0.4 | | - | |
| Output load condition | L_CMOS | - | - | 50 | pF | CMOS Load | |
| Input voltage | V_{IH} | 0.8Vcc | - | - | | OE terminal | |
| | V _{IL} | - | - | 0.2Vcc | | OE terminal | |
| Rise time | t _r | - | - | 5 | ns | 0.2Vcc to 0.8Vcc Level, L_CMOS=50pF | |
| all time | tf | - | - | 5 | ns | 0.2Vcc to 0.8Vcc Level, L_CMOS=50pF | |
| Start-up time | t_str | - | - | 5 | ms | t = 0 at 0.9Vcc | |
| Jitter | t _{DJ} | - | TBD | - | ps | Deterministic Jitter | |
| | t _{RJ} | - | TBD | - | ps | Random Jitter | |
| | t _{RMS} | - | TBD | - | ps | δ(RMS of total distribution) | |
| | t _{p-p} | - | TBD | - | ps | Peak to Peak | |
| | t _{acc} | - | - | - | ps | Accumulated Jitter(δ) n=2 to 50000 cycles | |
| Phase jitter | t _{PJ} | - | TBD | - | ps | Off set Frequency: 12kHz to 20MHz | |
| Phase noise | L(f) | - | - | - | dBc/Hz | Off set 1Hz | |
| | | - | TBD | - | dBc/Hz | Off set 10Hz | |
| | | - | TBD | - | dBc/Hz | Off set 100Hz Vcc=3.3V | |
| | | - | TBD | - | dBc/Hz | Off set 1kHz | |
| | | - | TBD | _ | dBc/Hz | Off set 10kHz | |
| | | - | TBD | _ | dBc/Hz | Off set 100kHz Vcc=3.3V | |
| | | - | TBD | _ | dBc/Hz | Off set 1MHz | |
| requency aging | f_age | -5 | - | 5 | x10 ⁻⁶ | @+25°C first year | |
| | | - | _ | - | | - | |

3.Timing chart

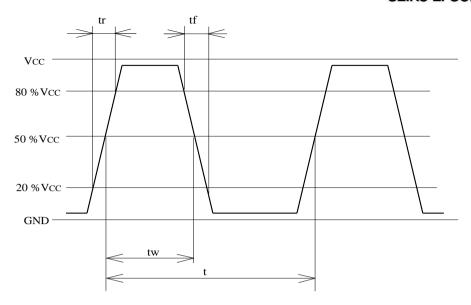

4.Test circuit

touit

1) Waveform observation

VCC

ST

OF

OE


Supply

GND

OUT


L_CMOS


2) Current consumption

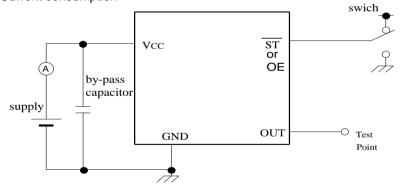


*Current consumption under the disable function should be = GND.


- 3) Condition
- (1) Oscilloscope
- · Band width should be minimum 5 times higher (wider) than measurement frequency.
- · Probe earth should be placed closely from test point and lead length should be as short as possible
- * Recommendable to use miniature socket. (Don't use earth lead.)
- (2) L_CMOS also includes probe capacitance.
- (3) By-pass capacitor (0.01 μ F to 0.1 μ F) is placed closely between VCC and GND.
- (4) Use the current meter whose internal impedance value is small.
- (5) Power supply
- Start up time (0 %VCC to 90 %VCC) of power source should be more than 150 µs.
- · Impedance of power supply should be as lowest as possible.

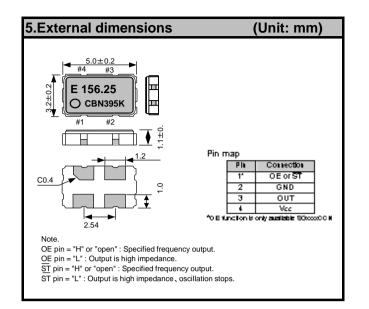

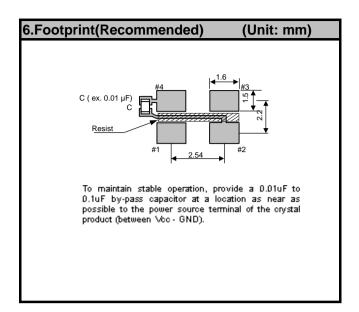

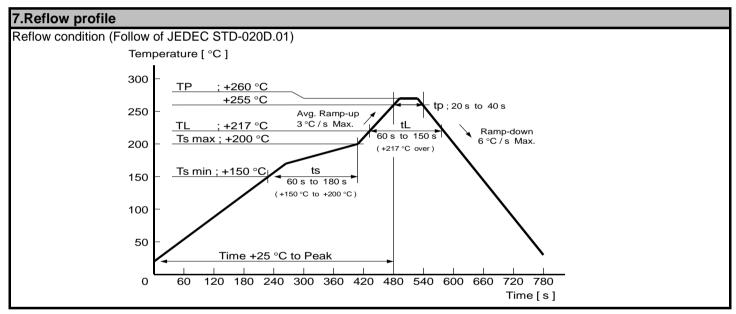

| 8.Packing | g informa | tion | | | |
|-------------|------------------------------------------------------|------------------------------|------------------------------|----------------|--|
| [1]Produc | 1]Product number last 2 digits code(xx) description | | The recommended code is "00" | | |
| | X1G0044 | 1710045xx | | | |
| | Code | Condition | Code | Condition | |
| | 01 | Any Q'ty vinyl bag(Tape cut) | 13 | 500pcs / Reel | |
| | 11 | Any Q'ty / Reel | 00 | 1000pcs / Reel | |
| | 12 | 250pcs / Reel | | | |

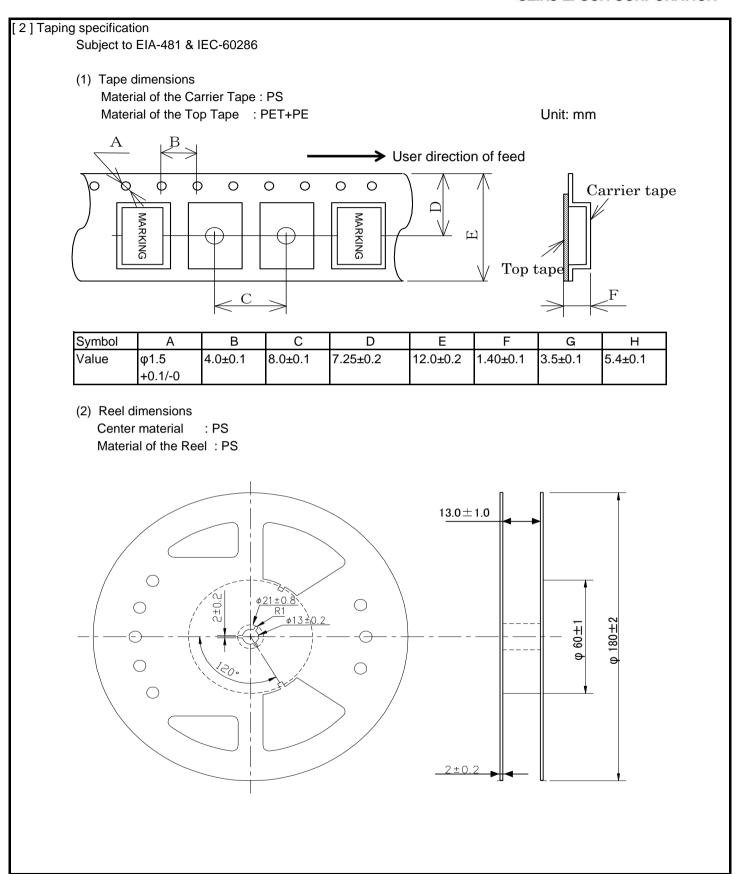

9.Notice

- · This material is subject to change without notice.
- Any part of this material may not be reproduced or duplicated in any form or any means without the written permission of Seiko Epson.
- The information about applied data, circuitry, software, usage, etc. written in this material is intended for reference only.
 - Seiko Epson does not assume any liability for the occurrence of customer damage or infringing on any patent or copyright of a third party.
- This material does not authorize the licensing for any patent or intellectual copyrights.
- When exporting the products or technology described in this material, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations.
- You are requested not to use the products (and any technical information furnished, if any) for the development and/or manufacture of weapon of mass destruction or for other military purposes. You are also requested that you
 - would not make the products available to any third party who may use the products for such prohibited purposes.
- These products are intended for general use in electronic equipment. When using them in specific applications that require
 - extremely high reliability, such as the applications stated below, you must obtain permission from Seiko Epson in advance.
 - / Space equipment (artificial satellites, rockets, etc.)
 - / Transportation vehicles and related (automobiles, aircraft, trains, vessels, etc.)
 - / Medical instruments to sustain life
 - / Submarine transmitters
 - / Power stations and related
 - / Fire work equipment and security equipment
 - / Traffic control equipment
 - / And others requiring equivalent reliability.

10.Contact us

http://www5.epsondevice.com/en/contact/