Clock OSC

SG5032CCN

Product name SG5032CCN Product Number / Ordering code

17.700000 MHz HJGA

X1G0044710047xx

Please refer to the 8.Packing information about xx (last 2 digits)


Output waveform CMOS

Pb free / Complies with EU RoHS directive

Reference weight Typ. 52 mg

1.Absolute maximum ratings	;					
Parameter	Symbol	Min.	Тур.	Max.	Unit	Conditions / Remarks
Maximum supply voltage	Vcc-GND	-0.3	-	+7	V	-
Storage temperature	T_stg	-40	-	+125	°C	Storage as single product
Input voltage	Vin	-0.5	-	Vcc+0.5	V	OE terminal

2.Specifications(characterist	ics)					
Parameter	Symbol	Min.	Тур.	Max.	Unit	Conditions / Remarks
Output frequency	fO		17.700000		MHz	
Supply voltage	Vcc	4.5	5	5.5	V	-
Operating temperature	T_use	-40	-	+85	°C	-
Frequency tolerance	f_tol	-50	-	50	x10 ⁻⁶	T_use
Current consumption	lcc	-	-	20	mA	No load condition
Stand-by current	I_std	-	-	-	μA	-
Disable current	I_dis	-	-	10.0	mA	OE = GND
Symmetry	SYM	40	-	60	%	50% Vcc Level L_CMOS=<50pF
Output voltage	V _{OH}	Vcc-0.4	-	-		-
	V _{OL}	-	-	0.4		-
Output load condition	L_CMOS	-	-	50	рF	CMOS Load
Input voltage	V _{IH}	0.8Vcc	-	-		OE terminal
	V _{IL}	-	-	0.2Vcc		OE terminal
Rise time	t _r	-	-	5	ns	0.2Vcc to 0.8Vcc Level, L_CMOS=50pF
Fall time	tf	-	-	5	ns	0.2Vcc to 0.8Vcc Level, L_CMOS=50pF
Start-up time	t_str	-	-	5	ms	t = 0 at 0.9Vcc
Jitter	t _{DJ}	-	TBD	-	ps	Deterministic Jitter
	t _{RJ}	-	TBD	-	ps	Random Jitter
	t _{RMS}	-	TBD	-	ps	δ(RMS of total distribution)
	t _{p-p}	-	TBD	-	ps	Peak to Peak
	t _{acc}	-	-	-	ps	Accumulated Jitter(δ) n=2 to 50000 cycles
Phase jitter	t _{PJ}	-	TBD	-	ps	Off set Frequency: 12kHz to 20MHz
Phase noise	L(f)	-	-	-	dBc/Hz	Off set 1Hz
		-	TBD	-	dBc/Hz	Off set 10Hz
		-	TBD	-	dBc/Hz	Off set 100Hz Vcc=3.3V
		-	TBD	-	dBc/Hz	Off set 1kHz
		-	TBD	-	dBc/Hz	Off set 10kHz
		-	TBD	-	dBc/Hz	Off set 100kHz Vcc=3.3V
		-	TBD	-	dBc/Hz	Off set 1MHz
Frequency aging	f_age	-5	-	5	x10 ⁻⁶	@+25°C first year
		-	-	-		-

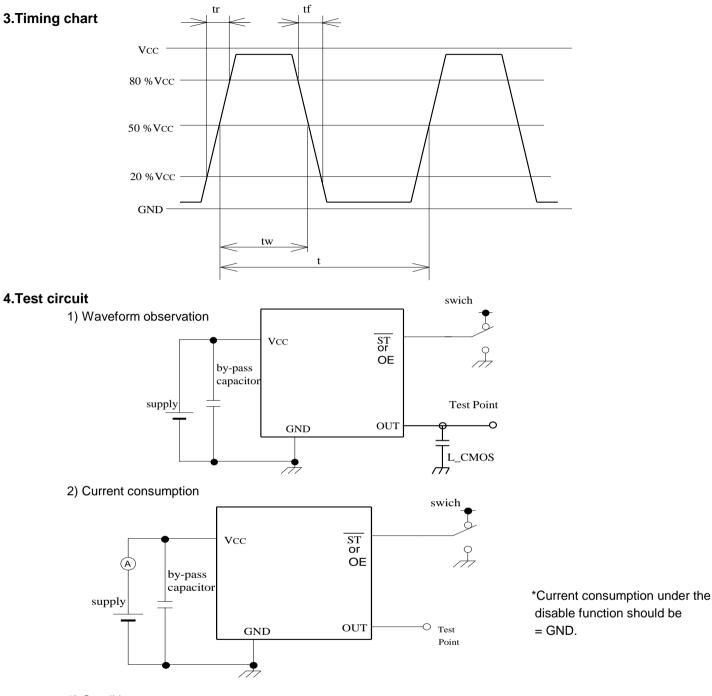

- 3) Condition
- (1) Oscilloscope

· Band width should be minimum 5 times higher (wider) than measurement frequency.

· Probe earth should be placed closely from test point and lead length should be as short as possible

* Recommendable to use miniature socket. (Don't use earth lead.)

(2) L_CMOS also includes probe capacitance.


(3) By-pass capacitor (0.01 μF to 0.1 $\mu F)$ is placed closely between VCC and GND.

(4) Use the current meter whose internal impedance value is small.


(5) Power supply

 \cdot Start up time (0 %VCC to 90 %VCC) of power source should be more than 150 $\mu s.$

 \cdot Impedance of power supply should be as lowest as possible.

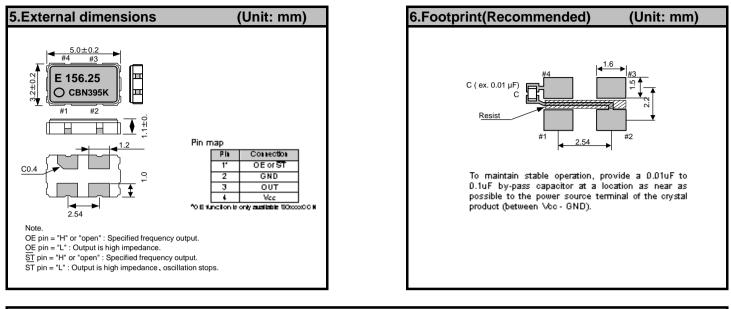




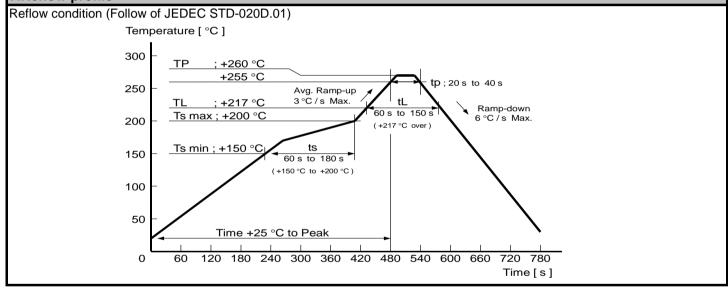

8.Packing information

[1]Product	t number la	ast 2 digits code(xx) description		The recommended code is "00"
		710047xx		
r				
	Code	Condition	Code	Condition
	01	Any Q'ty vinyl bag(Tape cut)	13	500pcs / Reel
	11	Any Q'ty / Reel	00	1000pcs / Reel
	12	250pcs / Reel		

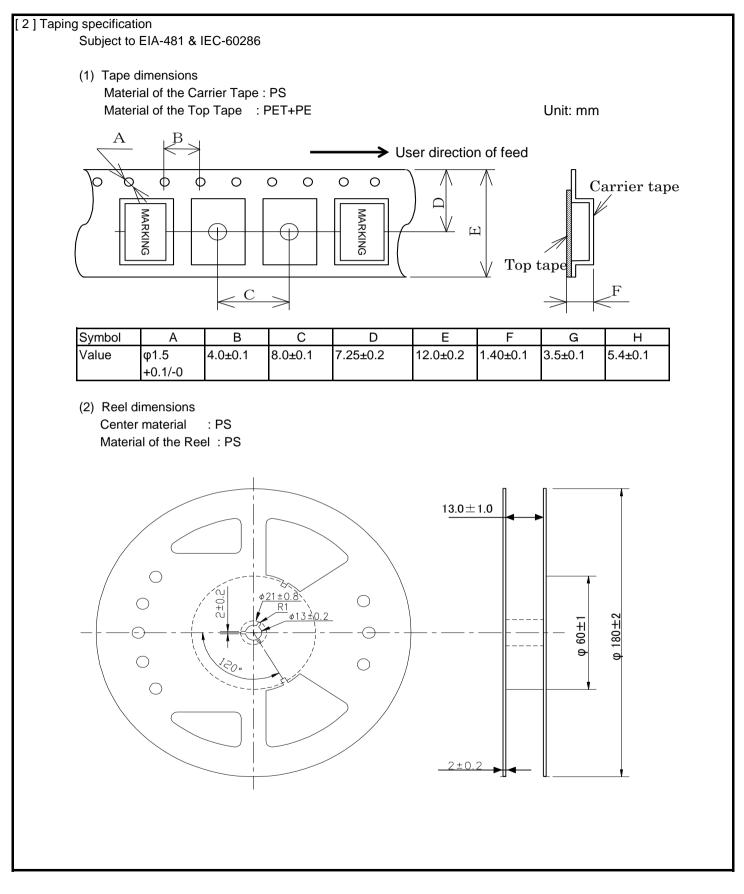

	his material is subject to change without notice.
	ny part of this material may not be reproduced or duplicated in any form or any means without the written ermission of Seiko Epson.
	he information about applied data,circuitry, software, usage, etc. written in this material is intended for eference only.
	eiko Epson does not assume any liability for the occurrence of customer damage or infringing on any patent r copyright of a third party.
	his material does not authorize the licensing for any patent or intellectual copyrights.
	hen exporting the products or technology described in this material, you should comply with the applicable
	xport control laws and regulations and follow the procedures required by such laws and regulations.
	ou are requested not to use the products (and any technical information furnished, if any) for the development
а	nd/or manufacture of weapon of mass destruction or for other military purposes. You are also requested that
	ou
	rould not make the products available to any third party who may use the products for such prohibited
	urposes.
	hese products are intended for general use in electronic equipment. When using them in specific applications at require
	xtremely high reliability, such as the applications stated below, you must obtain permission from Seiko Epson
	advance.
	/ Space equipment (artificial satellites, rockets, etc.)
	/ Transportation vehicles and related (automobiles, aircraft, trains, vessels, etc.)
	/ Medical instruments to sustain life
	/ Submarine transmitters
	/ Power stations and related
	/ Fire work equipment and security equipment
	/ Traffic control equipment
	/ And others requiring equivalent reliability.

10.Contact us

http://www5.epsondevice.com/en/contact/