


**U74CBT3126****CMOS IC****QUADRUPLE FET BUS SWITCH****DESCRIPTION**

The **U74CBT3126** is a quadruple line bus switch. It is composed of four 1-bit line switches with independent separate output-enable (OE) inputs. When OE is low, the switch is disabled.

To ensure the high-impedance state during power up or power down, OE should be tied to GND through a pull-down resistor and the minimum value of the resistor is determined by the current-sourcing capability of the driver.


FEATURES

- * 5 Ω switch connection between two ports
- * Max t_{pd} of 0.25 ns at 5V
- * Low power consumption, $I_{CC} = 3 \mu A$ (Max.) at 5.5V
- * TTL compatible input levels

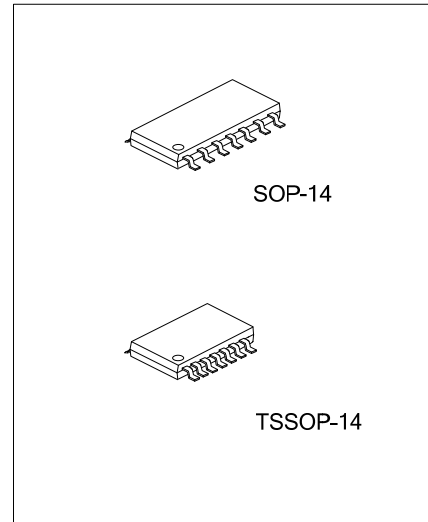
**ORDERING INFORMATION**

Ordering Number		Package	Packing
Lead Free	Halogen Free		
U74CBT3126L-S14-R	U74CBT3126G-S14-R	SOP-14	Tape Reel
U74CBT3126L-P14-R	U74CBT3126G-P14-R	TSSOP-14	Tape Reel

U74CBT3126G-S14-R (1) Packing Type (2) Package Type (3) Green Package	(1) R: Tape Reel (2) S14: SOP-14, P14: TSSOP-14 (3) G: Halogen Free and Lead Free, L: Lead Free
---	--

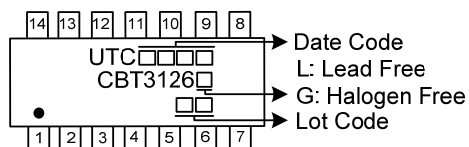MARKING


PIN CONFIGURATION

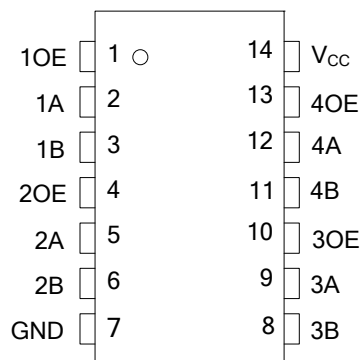

FUNCTION TABLE (each bus switch)

INPUT OE	FUNCTION
L	Z
H	A=B

LOGIC DIAGRAM (positive logic)

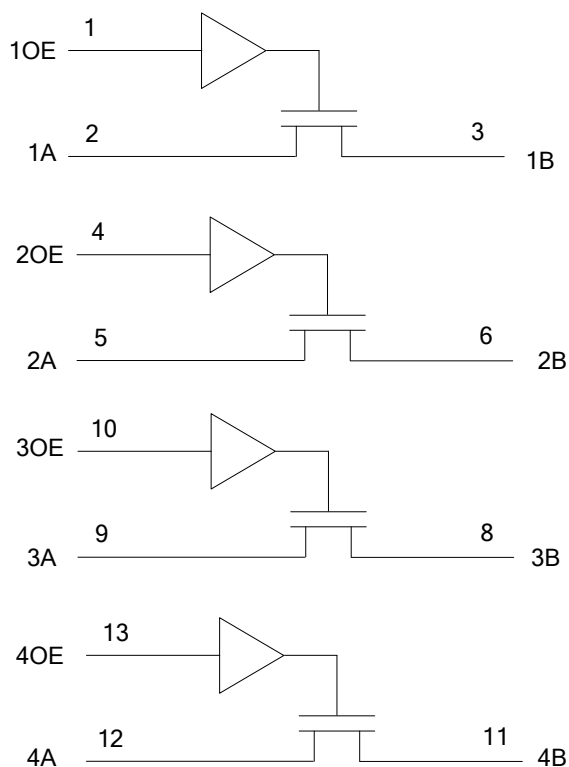

■ **ABSOLUTE MAXIMUM RATING** ($T_A = 25^\circ\text{C}$, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Supply Voltage		V_{CC}	-0.5~7	V
Input Voltage		V_{IN}	-0.5~7	V
Supply Voltage		V_{CC}	4 ~ 5.5	V
Control Input Voltage	High	V_{IH}	2	V
	Low	V_{IL}	0.8	V
Input Clamp Current		I_{IK}	-50	mA
Continuous Channel Current		I_{CH}	128	mA
Power Dissipation $T_{OPR} = -40^\circ\text{C}$ to $+125^\circ\text{C}$	SOP-14	P_D	600	mW
	TSSOP-14		500	
Operating Temperature		T_{OPR}	-40 ~ +85	$^\circ\text{C}$
Storage Temperature		T_{STG}	-65 ~ +150	$^\circ\text{C}$

Note: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

■ **THERMAL DATA**

PARAMETER		SYMBOL	RATINGS	UNIT
Junctions to Ambient	SOP-14	θ_{JA}	139	$^\circ\text{C/W}$
	TSSOP-14		170	


■ **ELECTRICAL CHARACTERISTICS** ($T_A = 25^\circ\text{C}$, $V_{CC} = 5\text{V}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Digital Input Diode Voltage	V_{IK}	$V_{CC} = 4.5\text{V}$, $I_I = -18\text{mA}$			-1.2	V
Input Leakage Current (OE inputs)	$I_{I(LEAK)}$	$V_{CC} = 5.5\text{V}$, $V_{IN} = 5.5\text{V}$ or GND			± 1	μA
Quiescent Supply Current	I_{CC}	$V_{CC} = 5.5\text{V}$, $V_{IN} = 5.5\text{V}$ or GND, $I_{OUT} = 0$			3	μA
Additional quiescent Supply Current	ΔI_{CC}	$V_{CC} = 5.5\text{V}$, One input at 3.4V, Other inputs at V_{CC} or GND			2.5	mA
Input Capacitance (OE)	C_{IN}	$V_{IN} = 3\text{V}$ or GND		3		pF
I/O Capacitance (OFF)	C_{IO}	$V_{OUT} = 3\text{V}$ or GND, OE = GND		4		pF
Resistor between two ports	r_{on}	$V_{CC} = 4\text{V}$, $V_{IN} = 2.4\text{V}$, $I_{IN} = 15\text{mA}$, TYP at $V_{CC} = 4\text{V}$		16	22	Ω
		$V_{CC} = 4.5\text{V}$, $V_{IN} = 0\text{V}$, $I_{IN} = 64\text{mA}$		5	7	
		$V_{CC} = 4.5\text{V}$, $V_{IN} = 0\text{V}$, $I_{IN} = 30\text{mA}$		5	7	
		$V_{CC} = 4.5\text{V}$, $V_{IN} = 2.4\text{V}$, $I_{IN} = 15\text{mA}$		10	15	

■ **SWITCHING CHARACTERISTICS** ($T_A = 25^\circ\text{C}$)


PARAMETER	SYMBOL	TEST CONDITIONS		MIN	MAX	UNIT
Propagation delay from input A (or B) to output B (or A)	t_{PLH}/t_{PHL} (t_{pd})	$C_L=50\text{pF}$, $R_L=500\Omega$	$V_{CC}=4\text{V}$		0.35	ns
			$V_{CC}=5\pm 0.5\text{V}$		0.25	
Propagation delay from input OE to output A or B	t_{PZL}/t_{PZH} (t_{en})		$V_{CC}=4\text{V}$		5.4	ns
			$V_{CC}=5\pm 0.5\text{V}$	1.6	5.1	
Propagation delay from input OE to output A or B	t_{PLZ}/t_{PHZ} (t_{dis})		$V_{CC}=4\text{V}$		5	ns
			$V_{CC}=5\pm 0.5\text{V}$	1	4.5	

■ TEST CIRCUIT AND WAVEFORMS

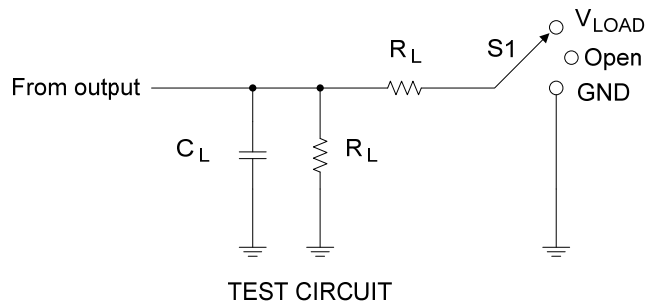


TEST	S1
t_{PLH}/t_{PHL}	Open
t_{PLZ}/t_{PZL}	V_{LOAD}
t_{PHZ}/t_{PZH}	Open

V_{CC}	Inputs		V_M	V_{LOAD}	C_L	R_L	V_{Δ}
	V_{IN}	t_r, t_f					
4V	V_{CC}	$\leq 2.5\text{ns}$	1.5V	7V	50pF	500 Ω	0.3V
5V $\pm$ 0.5V	V_{CC}	$\leq 2.5\text{ns}$	1.5V	7V	50pF	500 Ω	0.3V

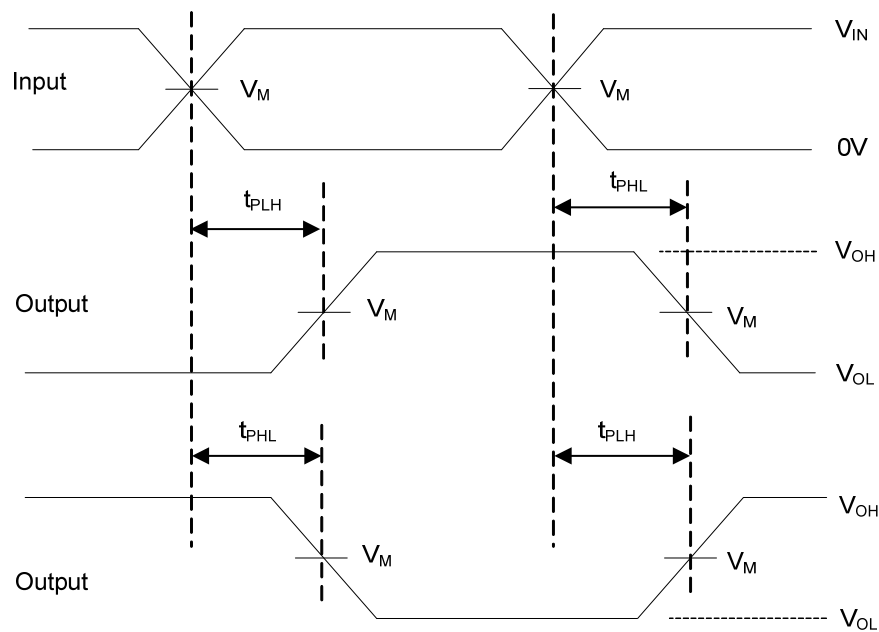

■ TEST CIRCUIT AND WAVEFORMS(Cont.)

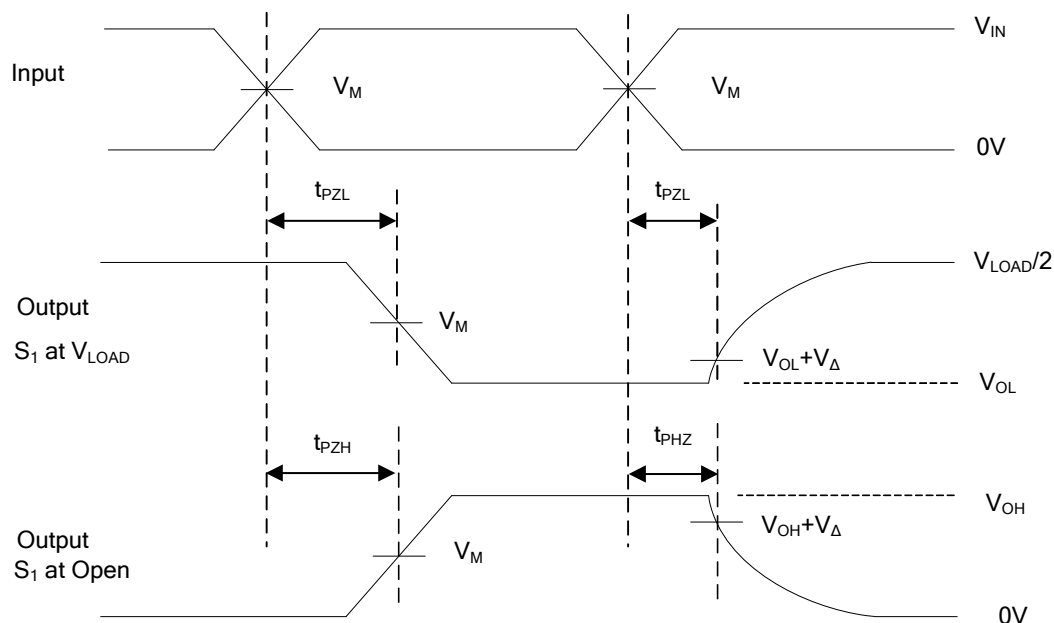

VOLTAGE WAVEFORMS ENABLE AND DISABLE TIMES

Notes: 1. C_L includes probe and jig capacitance.

2. All input pulses are supplied by generators having the following characteristics: $PRR \leq 10\text{MHz}$, $Z_O = 50\Omega$.

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.