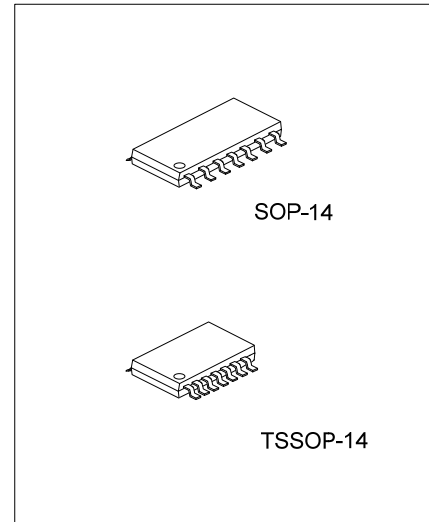


**U74AHCT00****CMOS IC****QUADRUPLE 2-INPUT
POSITIVE-NAND GATE****DESCRIPTION**

The **U74AHCT00** is a quadruple 2-input NAND gate which performs the function $Y = A \cdot B$ or $Y = \overline{A + B}$.


FEATURES

- * Low Power Dissipation: $I_{CC} = 2.0 \mu A$ (Max.)
- * High Speed: $t_{PD} = 5.7ns$ (Typ.)
- * High Noise Immunity


**ORDERING INFORMATION**

Ordering Number		Package	Packing
Lead Free	Halogen Free		
U74AHCT00L-S14-R	U74AHCT00G-S14-R	SOP-14	Tape Reel
U74AHCT00L-P14-R	U74AHCT00G-P14-R	TSSOP-14	Tape Reel

U74AHCT00G-S14-R (1) Packing Type (2) Package Type (3) Green Package	(1) R: Tape Reel (2) S14: SOP-14, P14: TSSOP-14 (3) G: Halogen Free and Lead Free, L: Lead Free
---	---

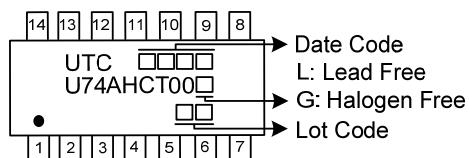MARKING


PIN CONFIGURATION

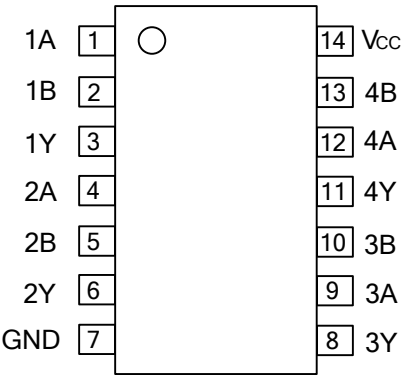

FUNCTION TABLE (Each Gate)

INPUTS		OUTPUT
A	B	Y
L	L	H
L	H	H
H	L	H
H	H	L

LOGIC DIAGRAM (Positive Logic)

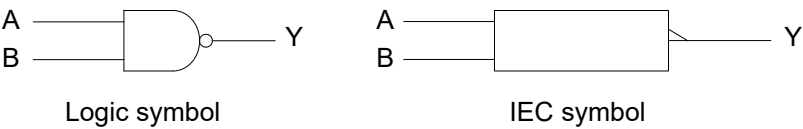

■ ABSOLUTE MAXIMUM RATING

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V_{CC}	-0.5 ~ 7	V
Input Voltage	V_{IN}	-0.5 ~ 7	V
Output Voltage	V_{OUT}	-0.5 ~ $V_{CC}+0.5$	V
Input Clamp Current	I_{IK}	-20	mA
Output Clamp Current	I_{OK}	±20	mA
Output Current	I_{OUT}	±25	mA
V_{CC} or GND Current	I_{CC}	±50	mA
Storage Temperature	T_{STG}	-65 ~ +150	°C

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage	V_{CC}		4.5		5.5	V
Input Voltage	V_{IN}		0		5.5	V
Output Voltage	V_{OUT}		0		V_{CC}	V
Input Transition Rise or Fall Rate	$\Delta t/\Delta v$	$V_{CC}=5.0+0.5V$			20	ns/V
Operating Temperature	T_A		-40		+125	°C

■ STATIC CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITIONS	$T_A=25^\circ\text{C}$			$T_A=-40\sim+125^\circ\text{C}$			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
High-Level Input Voltage	V_{IH}	$V_{CC}=4.5\sim 5.5V$	2.0			2.0			V
Low-Level Input Voltage	V_{IL}	$V_{CC}=4.5\sim 5.5V$			0.8			0.8	V
High-Level Output Voltage	V_{OH}	$V_{CC}=4.5V, I_{OH}=-50\mu A$	4.4	4.5		4.4			V
		$V_{CC}=4.5V, I_{OH}=-8mA$	3.94			3.7			V
Low-Level Output Voltage	V_{OL}	$V_{CC}=4.5V, I_{OL}=50\mu A$			0.1			0.1	V
		$V_{CC}=4.5V, I_{OL}=8mA$			0.36			0.55	V
Input Leakage Current	$I_{I(LEAK)}$	$V_{CC}=0\sim 5.5V, V_{IN}=V_{CC}$ or GND			±0.1			±2	μA
Quiescent Supply Current	I_Q	$V_{CC}=5.5V, V_{IN}=V_{CC}$ or GND, $I_{OUT}=0$			2			40	μA
Additional quiescent Supply Current	ΔI_Q	$V_{CC}=5.5V, V_{IN}=3.4V$; other input at V_{CC} or GND; $I_{OUT}=0$			1.35			1.5	mA


■ DYNAMIC CHARACTERISTICS ($t_R, t_F \leq 3$ ns, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	$T_A=25^\circ\text{C}$			$T_A=-40\sim+125^\circ\text{C}$			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
Propagation delay from input (A and B) to output (Y)	t_{PLH}	$V_{CC}=5\pm 0.5V, C_L=15pF$		5.7	7.9	1.0		10	ns
	t_{PHL}			5.7	7.9	1.0		10	ns
	t_{PLH}	$V_{CC}=5\pm 0.5V, C_L=50pF$		6.2	8.9	1.0		11	ns
	t_{PHL}			6.2	8.9	1.0		11	ns


■ OPERATING CHARACTERISTICS ($V_{CC}=5V$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input Capacitance	C_{IN}	$V_{CC}=5V, V_{IN}=V_{CC}$ or GND		2	10	pF
Power Dissipation Capacitance	C_{PD}	No load, $f=1MHz$		10.5		pF

■ TEST CIRCUIT AND WAVEFORM

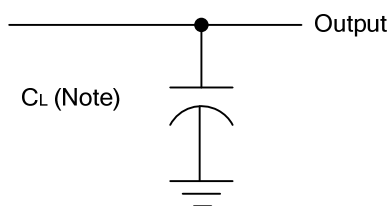

Note: C_L includes probe and jig capacitance.

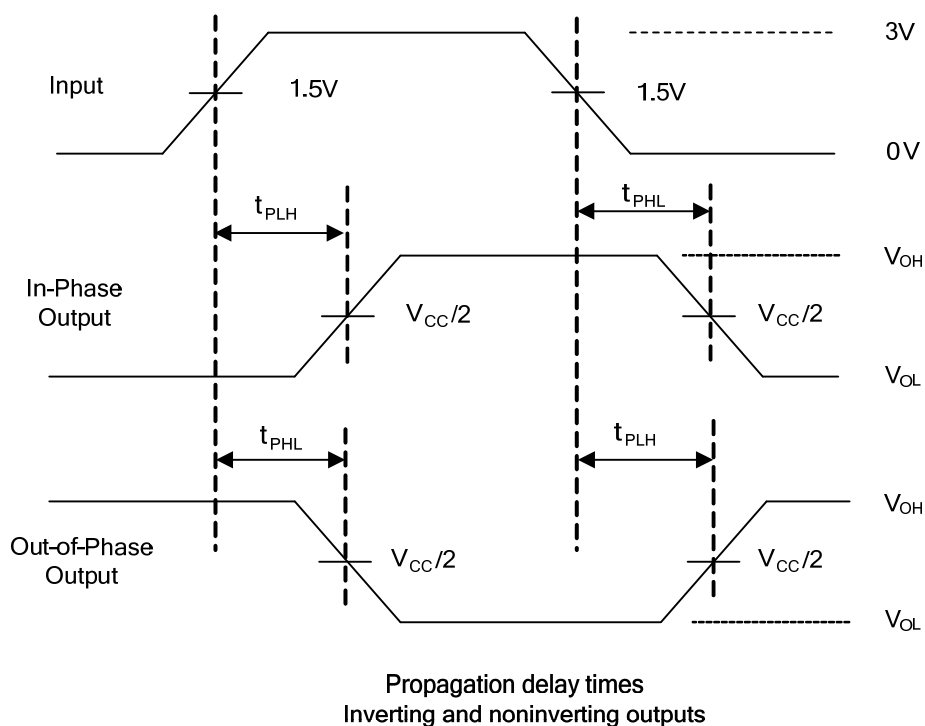

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.