


**U74HCT08****CMOS IC****QUAD 2-INPUT AND GATES****DESCRIPTION**


The **U74HCT08** contains four independent 2-input AND gates, perform the Boolean function $Y = A \bullet B$ or $Y = \overline{A + B}$ in positive logic.

FEATURES

- * Operation Voltage Range: 4.5~5.5V
- * Low Power Dissipation: $I_{CC}=20\mu A$ (Max.)
- * High Speed: $t_{PD}=13ns$ (TYP)
- * Low Input Current: $1\mu A$ Max
- * Input are TTL-Voltage Compatible



SOP-14



TSSOP-14

ORDERING INFORMATION

Ordering Number		Package	Packing
Lead Free	Halogen Free		
U74HCT08L-S14-R	U74HCT08G-S14-R	SOP-14	Tape Reel
U74HCT08L-P14-R	U74HCT08G-P14-R	TSSOP-14	Tape Reel

U74HCT08G-S14-R


- (1) Packing Type
- (2) Package Type
- (3) Green Package

- (1) R: Tape Reel
- (2) S14: SOP-14, P14: TSSOP-14
- (3) G: Halogen Free and Lead Free, L: Lead Free

MARKING

SOP-14	TSSOP-14
14 13 12 11 10 9 8 UTC ☐☐☐☐ U74HCT08 ☐ ● ☐☐ 1 2 3 4 5 6 7 → Date Code → L: Lead Free → G: Halogen Free → Lot Code	14 13 12 11 10 9 8 UTC ☐☐☐☐ U74HCT08 ☐ ● ☐☐ 1 2 3 4 5 6 7 → Date Code → L: Lead Free → G: Halogen Free → Lot Code

■ PIN CONFIGURATION

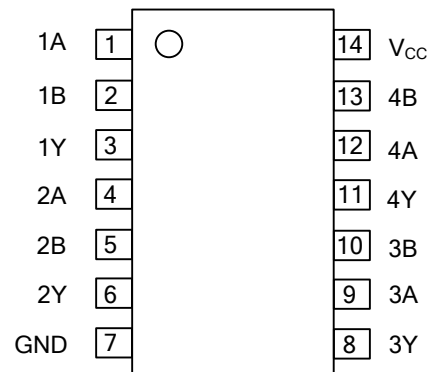

■ FUNCTION TABLE (Each Gate)

INPUT(A)	INPUT(B)	OUTPUT(Y)
H	H	H
H	L	L
L	H	L
L	L	L

■ LOGIC DIAGRAM (Positive Logic)



■ ABSOLUTE MAXIMUM RATING

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V_{CC}	-0.5~7	V
Input Clamp Current	I_{IK}	± 20	mA
Output Clamp Current	I_{OK}	± 20	mA
Output Current	I_{OUT}	± 25	mA
V_{CC} or GND Current	I_{CC}	± 50	mA
Storage Temperature	T_{STG}	-65 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.
Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	θ_{JA}	127	°C/W

■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage	V_{CC}		4.5	5.0	5.5	V
Input Voltage	V_{IN}		0		V_{CC}	V
Output Voltage	V_{OUT}		0		V_{CC}	V
Input Transition Rise or Fall Times	$\Delta t/\Delta v$				500	ns
Operating Ambient Temperature	T_A		-40		+125	°C

■ ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
High-Level Input Voltage	V_{IH}	$V_{CC}=4.5\text{V}\sim 5.5\text{V}$	2			V
Low-Level Input Voltage	V_{IL}	$V_{CC}=4.5\text{V}\sim 5.5\text{V}$			0.8	V
High-Level Output Voltage	V_{OH}	$V_{CC}=4.5\text{V}$, $I_{OH}=-20\mu\text{A}$	4.4	4.499		V
		$V_{CC}=4.5\text{V}$, $I_{OH}=-4\text{mA}$	3.98	4.3		
Low-Level Output Voltage	V_{OL}	$V_{CC}=4.5\text{V}$, $I_{OL}=20\mu\text{A}$		0.001	0.1	V
		$V_{CC}=4.5\text{V}$, $I_{OL}=4\text{mA}$		0.17	0.26	
Input Leakage Current	$I_{I(LEAK)}$	$V_{CC}=5.5\text{V}$, $V_{IN}=V_{CC}$ or GND		± 0.1	± 100	nA
Quiescent Supply Current	I_Q	$V_{CC}=5.5\text{V}$, $V_{IN}=V_{CC}$ or GND, $I_{OUT}=0$			2	μA
Additional Quiescent Supply Current	ΔI_Q	$V_{CC}=5.5\text{V}$, One input at 0.5V or 2.4V, other inputs at 0 or V_{CC}		1.4	2.4	mA
Input Capacitance	C_{IN}	$V_{CC}=4.5\text{V}\sim 5.5\text{V}$		3	10	pF


■ SWITCHING CHARACTERISTICS ($T_A=25^\circ\text{C}$, Input: $t_R=t_F=6\text{ns}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Propagation delay from input (nA) and (nB) to output(nY)	t_{PHL} / t_{PLH}	$C_L = 50\text{pF}$, $V_{CC}=4.5\text{V}$		15	24	ns
		$V_{CC}=5.5\text{V}$		13	22	
Output Transition Time	t_{THL} / t_{TLH}	$C_L = 50\text{pF}$, $V_{CC}=4.5\text{V}$		9	15	ns
		$V_{CC}=5.5\text{V}$		8	14	


■ OPERATING CHARACTERISTICS ($T_A=25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Power Dissipation Capacitance	C_{PD}	No Load		20		pF

■ TEST CIRCUIT AND WAVEFORMS

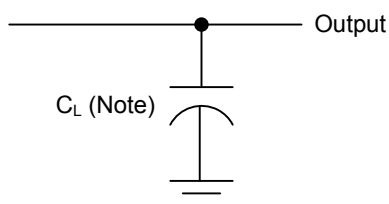

Note: C_L includes probe and jig capacitance.

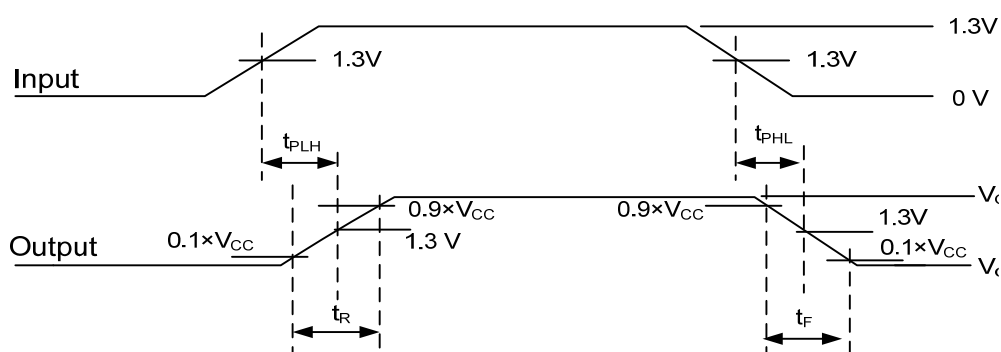

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.