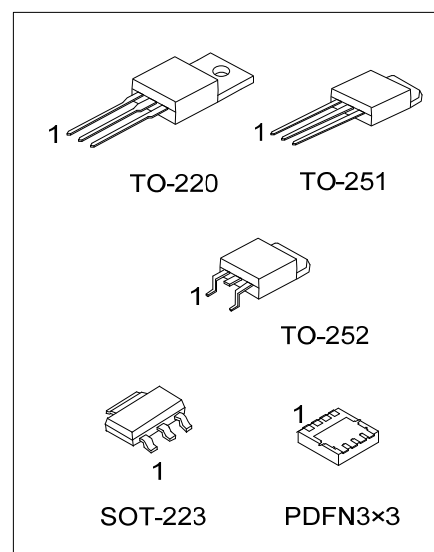
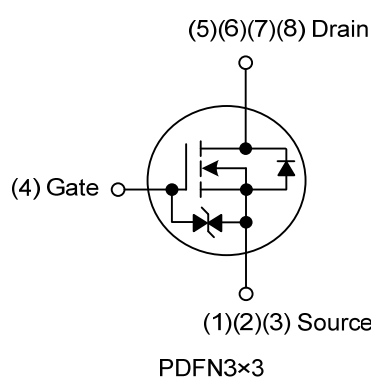
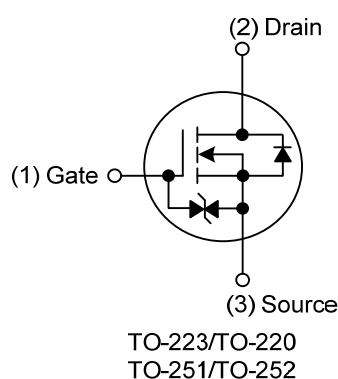


**UF4N20Z****Power MOSFET****4.0A, 200V N-CHANNEL
POWER MOSFET****DESCRIPTION**

The UTC **UF4N20Z** is an N-channel mode power MOSFET using UTC's advanced technology to provide customers with a minimum on-state resistance, low gate charge and superior switching performance.

FEATURES

- * $R_{DS(ON)} \leq 2.0 \Omega$ @ $V_{GS}=10V$, $I_D=4.0A$
- * High switching speed
- * 100% avalanche tested




SYMBOL**ORDERING INFORMATION**

Ordering Number		Package	Pin Assignment								Packing
Lead Free	Halogen Free		1	2	3	4	5	6	7	8	
UF4N20ZL-AA3-R	UF4N20ZG-AA3-R	SOT-223	G	D	S	-	-	-	-	-	Tape Reel
UF4N20ZL-TA3-T	UF4N20ZG-TA3-T	TO-220	G	D	S	-	-	-	-	-	Tube
UF4N20ZL-TM3-T	UF4N20ZG-TM3-T	TO-251	G	D	S	-	-	-	-	-	Tube
UF4N20ZL-TN3-R	UF4N20ZG-TN3-R	TO-252	G	D	S	-	-	-	-	-	Tape Reel
UF4N20ZL-P3030-R	UF4N20ZG-P3030-R	PDFN3x3	S	S	S	G	D	D	D	D	Tape Reel

Note: Pin Assignment: G: Gate D: Drain S: Source

UF4N20ZG-AA3-R (1) Packing Type (2) Package Type (3) Green Package		(1) R: Tape Reel, T: Tube (2) AA3: SOT-223, TA3: TO-220, TM3: TO-251 TN3: TO-252, P3030: PDFN3x3 (3) G: Halogen Free and Lead Free, L: Lead Free
--	--	--

MARKING

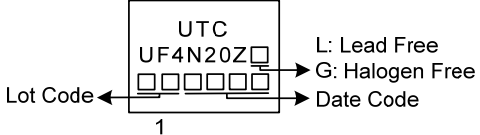PACKAGE	MARKING
SOT-223	 1
TO-220 TO-251 TO-252	 1
PDFN3×3	

■ ABSOLUTE MAXIMUM RATINGS ($T_A=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Drain-Source Voltage		V_{DS}	200	V
Gate-Source Voltage		V_{GS}	± 20	V
Continuous Drain Current		I_D	4	A
Avalanche Energy	Single Pulsed	E_{AS}	80	mJ
Power Dissipation	SOT-223	P_D	0.8	W
	TO-220		2	W
	TO-251/TO-252		1.14	W
	PDFN3×3		2.1 (Note 2)	W
Junction Temperature		T_J	+150	$^{\circ}\text{C}$
Storage Temperature		T_{STG}	-55 ~ +150	$^{\circ}\text{C}$

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Device mounted on FR-4 substrate P_C board, 2oz copper, with 1inch square copper plate.

■ THERMAL DATA







PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	SOT-223	θ_{JA}	156	$^{\circ}\text{C/W}$
	TO-220		62.5	$^{\circ}\text{C/W}$
	TO-251/TO-252		110	$^{\circ}\text{C/W}$
	PDFN3×3		60 (Note)	$^{\circ}\text{C/W}$
Junction to Case	SOT-223	θ_{JC}	25	$^{\circ}\text{C/W}$
	TO-220		1.88	$^{\circ}\text{C/W}$
	TO-251/TO-252		3.125 (Note)	$^{\circ}\text{C/W}$
	PDFN3×3		4.2 (Note)	$^{\circ}\text{C/W}$

Note: Device mounted on FR-4 substrate P_C board, 2oz copper, with 1inch square copper plate.







■ ELECTRICAL CHARACTERISTICS (T_J=25°C ,unless otherwise specified)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS							
Drain-Source Breakdown Voltage		BV _{DSS}	I _D =250μA, V _{DS} =0V	200			V
Drain-Source Leakage Current		I _{DSS}	V _{DS} =200V			10	μA
Gate-Source Leakage Current	Forward	I _{GSS}	V _{GS} =+20V, V _{DS} =0V			10	μA
	Reverse		V _{GS} =-20V, V _{DS} =0V			-10	μA
ON CHARACTERISTICS							
Gate Threshold Voltage		V _{GS(TH)}	I _D =250μA	2.0		4.0	V
Static Drain-Source On-State Resistance		R _{DS(ON)}	V _{GS} =10V, I _D =4.0A			2.0	Ω
DYNAMIC PARAMETERS							
Input Capacitance		C _{ISS}	V _{GS} =0V, V _{DS} =25V, f=1MHz		194		pF
Output Capacitance		C _{OSS}			18.3		pF
Reverse Transfer Capacitance		C _{RSS}			8		pF
SWITCHING PARAMETERS							
Total Gate Charge		Q _G	V _{DD} =30V, V _{GS} =10V, I _D =4A, I _G =1mA		5.8		nC
Gate to Source Charge		Q _{GS}			2.1		nC
Gate to Drain Charge		Q _{GD}			1.1		nC
Turn-ON Delay Time		t _{D(ON)}	V _{DD} =30V, V _{GS} =10V, I _D =4A, R _G =25Ω		2.8		ns
Rise Time		t _R			15.2		ns
Turn-OFF Delay Time		t _{D(OFF)}			13		ns
Fall-Time		t _F			19.6		ns
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS							
Maximum Continuous Drain-Source Diode Forward Current		I _S				4	A
Maximum Pulsed Drain-Source Diode Forward Current		I _{SM}				16	A
Drain-Source Diode Forward Voltage		V _{SD}	I _S =4A, V _{GS} =0V	0.1		1.48	V
Body Diode Reverse Recovery Time		t _{rr}	I _S =4A, V _{GS} =0V, dI _F /dt=100A/μs		106		nS
Body Diode Reverse Recovery Charge		Q _{rr}			400		nC


■ TYPICAL CHARACTERISTICS

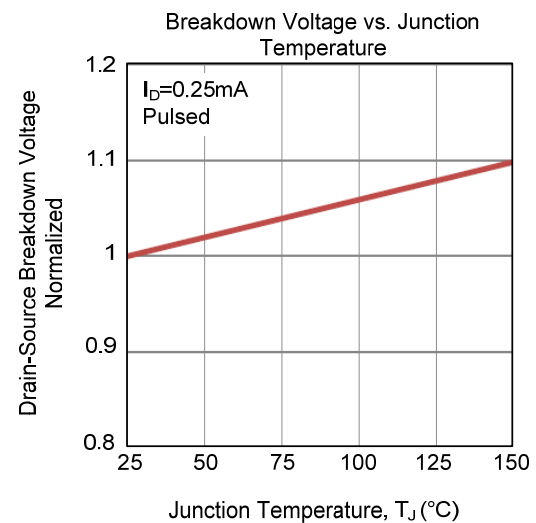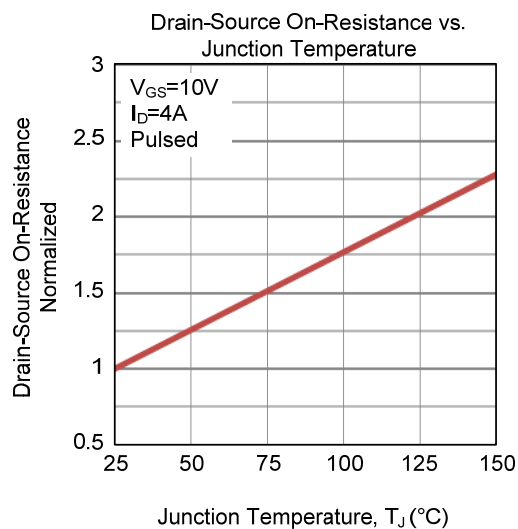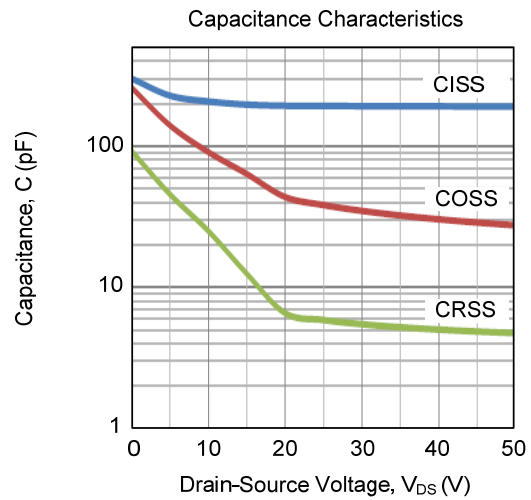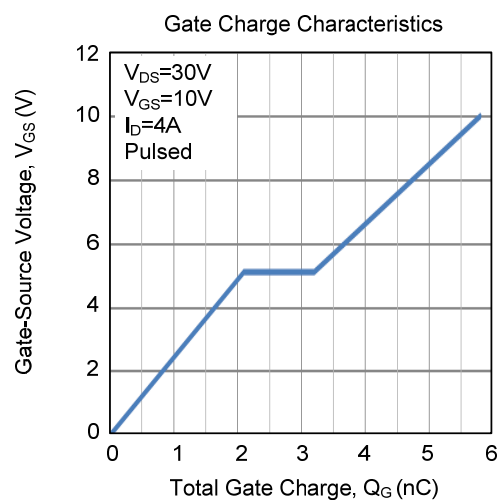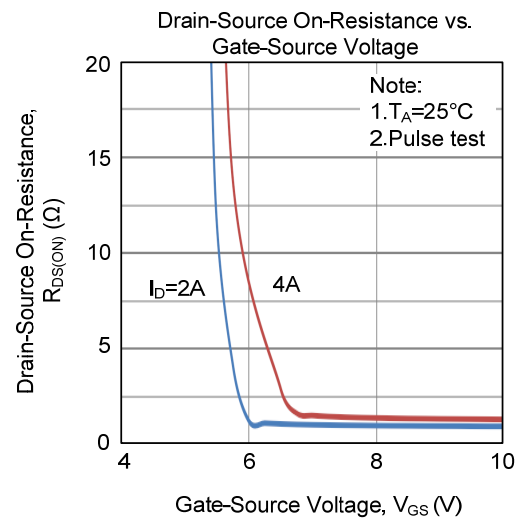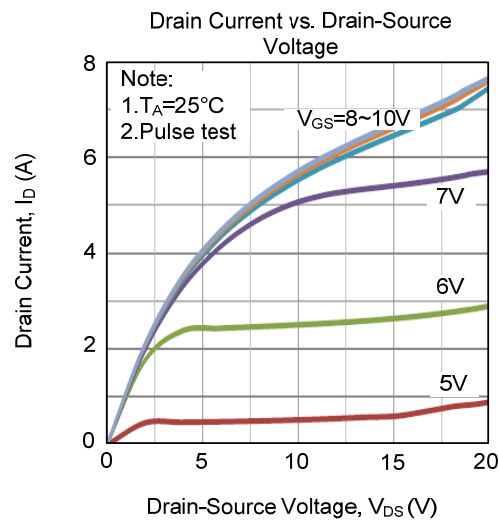

■ TYPICAL CHARACTERISTICS (Cont.)

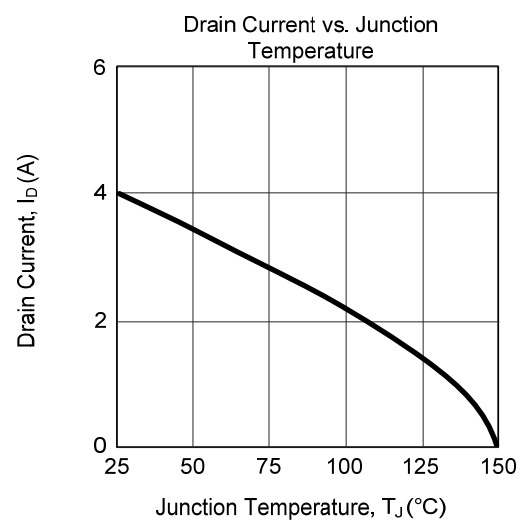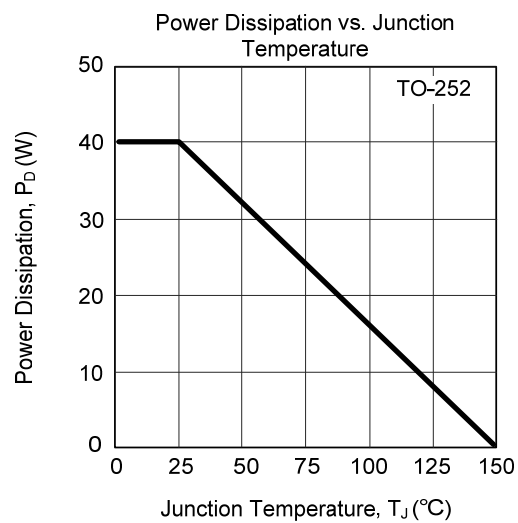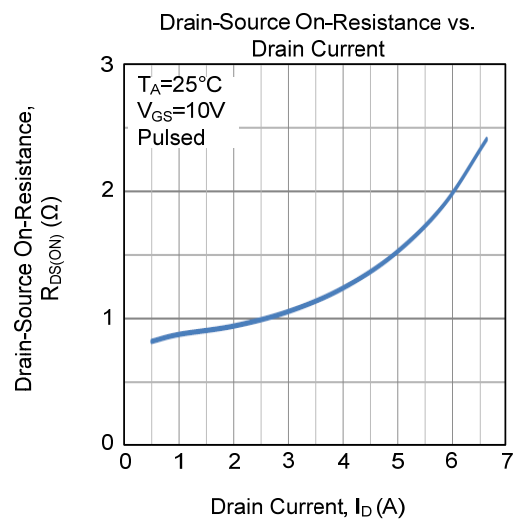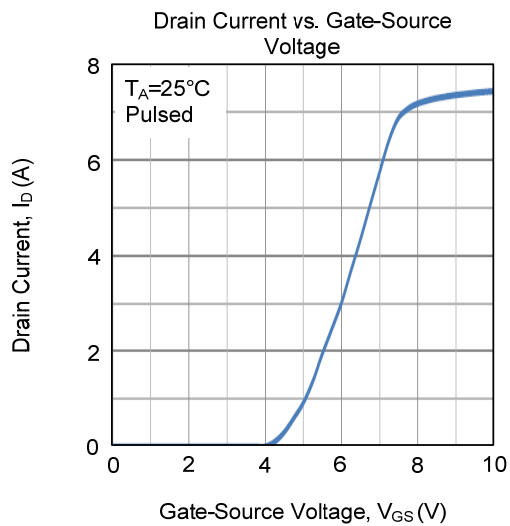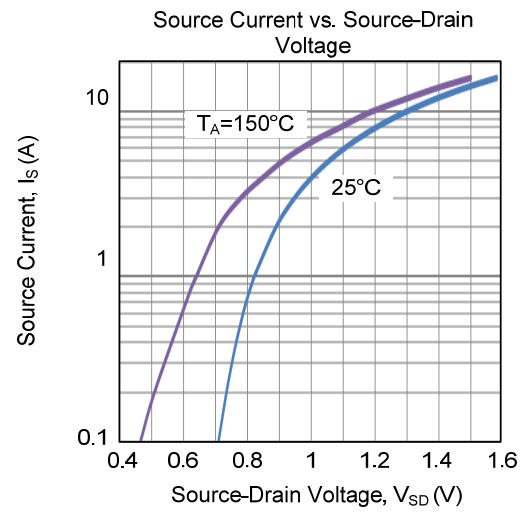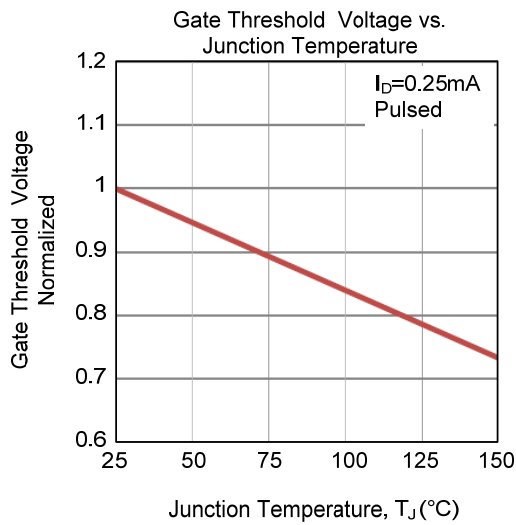

■ TYPICAL CHARACTERISTICS (Cont.)

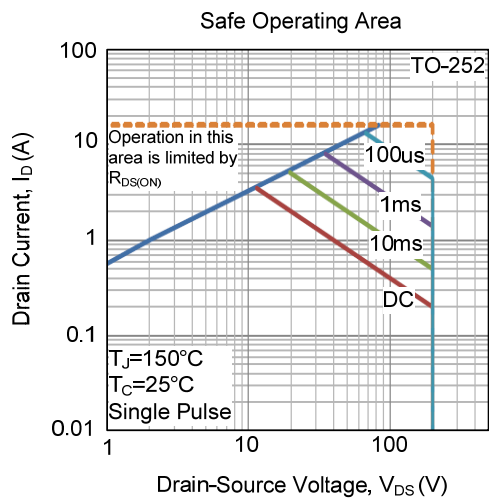

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.