


SK32B THRU SK310B

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 20 to 100 Volts Forward Current - 3.0 Amperes

DO-214AA

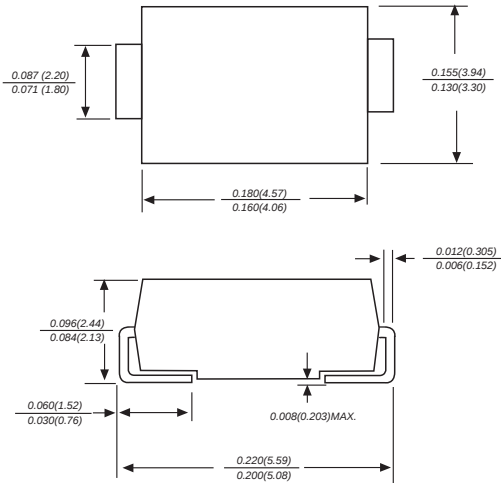

Dimensions in inches and (millimeters)

FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ For surface mounted applications
- ◆ Metal silicon junction, majority carrier conduction
- ◆ Low power loss, high efficiency
- ◆ Built-in strain relief, ideal for automated placement
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 260°C/10 seconds at terminals

MECHANICAL DATA

Case: JEDEC DO-214AA molded plastic body

Terminals: leads solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.003 ounce, 0.093 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.


	SYMBOLS	SK32B	SK33B	SK34B	SK35B	SK36B	SK38B	SK310B	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	50	60	80	100	V
Maximum RMS voltage	V _{RMS}	14	21	28	35	42	56	70	V
Maximum DC blocking voltage	V _{DC}	20	30	40	50	60	80	100	V
Maximum average forward rectified current at T _L (see fig.1)	I _(AV)	3.0							A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load	I _{FSM}	70.0							A
Maximum instantaneous forward voltage at 3.0A	V _F	0.55			0.70		0.85		V
Maximum DC reverse current T _A =25℃ at rated DC blocking voltage T _A =100℃	I _R	0.5					0.1		mA
		20					10		
Typical junction capacitance (NOTE 1)	C _J	500			300				pF
Typical thermal resistance (NOTE 2)	R _{θJA}	68.0							℃/W
Operating junction temperature range	T _J	-55 to +125			-55 to +150				℃
Storage temperature range	T _{STG}	-55 to +150							℃

Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.



2. P.C.B. mounted with 0.2x0.2" (5.0x5.0mm) copper pad areas

RATINGS AND CHARACTERISTIC CURVES SK32B THRU SK310B



AVERAGE FORWARD RECTIFIED CURRENT,
AMPERES

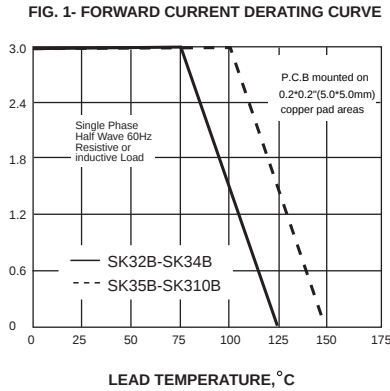

PEAK FORWARD SURGE CURRENT,
AMPERES

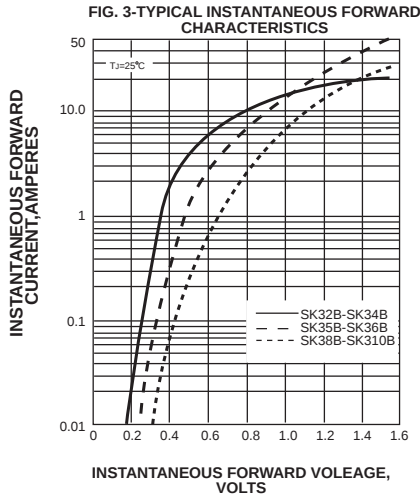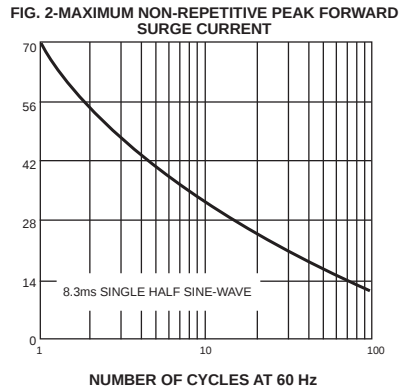

INSTANTANEOUS REVERSE CURRENT,
MILLIAMPERES

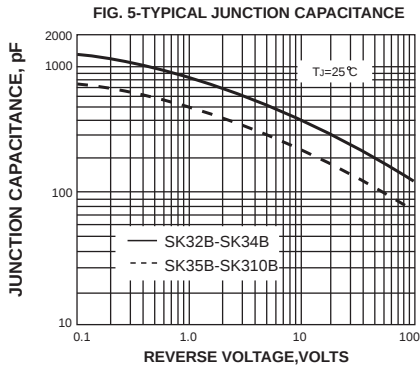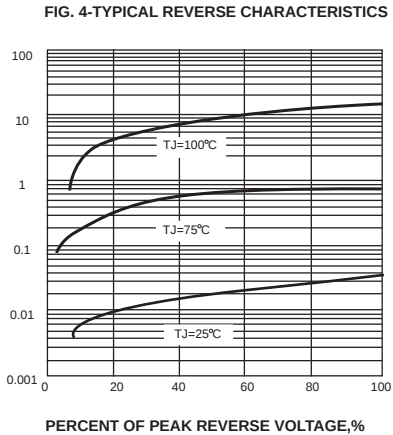

TRANSIENT THERMAL IMPEDANCE,
°C/W

