

**U74AVC4T245**

Preliminary

CMOS IC

4 BIT DUAL-SUPPLY BUS TRANSCEIVER WITH CONFIGURABLE VOLTAGE TRANSLATION AND 3-STATE OUTPUTS

DESCRIPTION

The UTC **U74AVC4T245** is an 4-bit dual supply transceiver that enables bidirectional level translation. The A port is designed to track V_{CCA} . V_{CCA} accepts any supply voltage from 1.2V to 3.6V. The B port is designed to track V_{CCB} . V_{CCB} accepts any supply voltage from 1.2V to 3.6V. The UTC **U74AVC4T245** is optimized to operate with V_{CCA}/V_{CCB} set at 1.4V to 3.6V. It is operational with V_{CCA}/V_{CCB} as low as 1.2V. This allows for universal low-voltage bidirectional translation between any of the 1.2V, 1.5V, 1.8V, 2.5V and 3.3V voltage nodes.

The UTC **U74AVC4T245** device is designed for asynchronous communication between two data buses. The logic levels of the direction-control (DIR) input and the output-enable ($\overline{OE}$) input activate either the B-port outputs or the A-port outputs or place both output ports into the high-impedance mode. The device transmits data from the A bus to the B bus when the B-port outputs are activated, and from the B bus to the A bus when the A-port outputs are activated. The input circuitry on both A and B ports is always active and must have a logic HIGH or LOW level applied to prevent excess I_{CC} and I_{CCZ} .

The UTC **U74AVC4T245** device is designed so that the control pins (1DIR, 2DIR, $1\overline{OE}$ and $2\overline{OE}$) are supplied by V_{CCA} . This device is fully specified for partial-power-down applications using I_{OFF} . The I_{OFF} circuitry disables the outputs, preventing any damaging current backflow through the device when it is powered down.

The V_{CC} isolation feature ensures that if either V_{CC} input is at GND, then both ports are in the high-impedance state. To ensure the high-impedance state during power up or power down, $\overline{OE}$ should be tied to V_{CC} through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.


FEATURES

- * Operation Voltage Range: 1.2~3.6V
- * Control Inputs VIH/VIL Levels Are Referenced to V_{CCA} Voltage
- * I/Os Are 4.6V Tolerant
- * I_{OFF} Supports Partial Power Down Mode Operation


ORDERING INFORMATION

Ordering Number		Package	Packing
Lead Free	Halogen Free		
U74AVC4T245L-S16-R	U74AVC4T245G-S16-R	SOP-16	Tape Reel
U74AVC4T245L-P16-R	U74AVC4T245G-P16-R	TSSOP-16	Tape Reel


U74AVC4T245G-S16-R	(1)Packing Type (2)Package Type (3)Green Package	(1) R: Tape Reel (2) S16: SOP-16, P16: TSSOP-16 (3) G: Halogen Free and Lead Free, L: Lead Free
--------------------	--	---

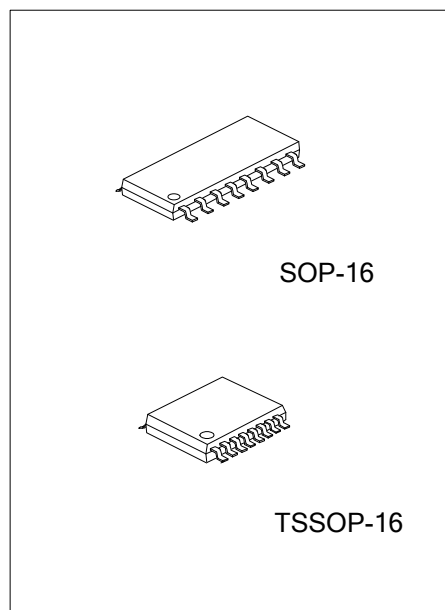

MARKING

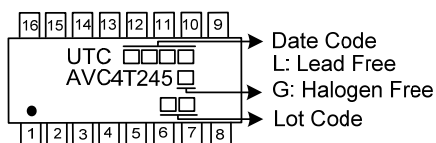

PIN CONFIGURATION

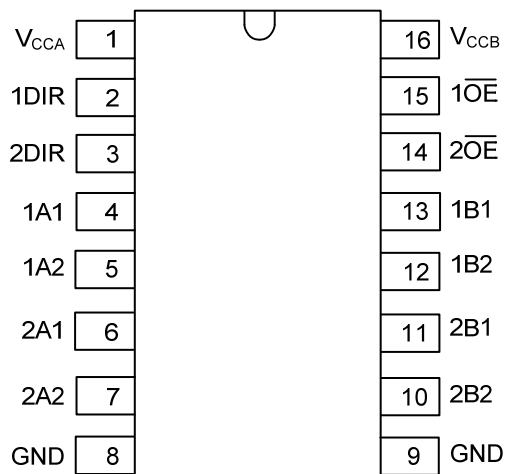

PIN DESCRIPTION


PIN NO.	PIN NAME	TYPE	DESCRIPTION
1	V _{CCA}		A-port power supply voltage. $1.2V \leq V_{CCA} \leq 3.6V$
2	1DIR	I	Direction-control input for '1' ports
3	2DIR	I	Direction-control input for '2' ports
4	1A1	I/O	Input/output 1A1. Referenced to V _{CCA}
5	1A2	I/O	Input/output 1A2. Referenced to V _{CCA}
6	2A1	I/O	Input/output 2A1. Referenced to V _{CCA}
7	2A2	I/O	Input/output 2A2. Referenced to V _{CCA}
8, 9	GND		Ground
10	2B2	I/O	Input/output 2B2. Referenced to V _{CCB}
11	2B1	I/O	Input/output 2B1. Referenced to V _{CCB}
12	1B2	I/O	Input/output 1B2. Referenced to V _{CCB}
13	1B1	I/O	Input/output 1B1. Referenced to V _{CCB}
14	2OE	I	3-state output-mode enables. Pull OE high to place '2' outputs in 3-state mode. Referenced to V _{CCA}
15	1OE	I	3-state output-mode enables. Pull OE high to place '1' outputs in 3-state mode. Referenced to V _{CCA}
16	V _{CCB}		B-port power supply voltage. $1.2V \leq V_{CCB} \leq 3.6V$

■ FUNCTION TABLE

INPUTS		OUTPUT		OPERATION
$\overline{OE}_n$	DIRn	A PORT	B PORT	
L	L	Enabled	Hi-Z	Bn data to An data
L	H	Hi-Z	Enabled	An data to Bn data
H	X	Hi-Z	Hi-Z	Isolation

Notes: 1. L: low voltage level; H: high voltage level; X: don't care
 2. Input circuits of the data I/Os are always active.

■ LOGIC DIAGRAM

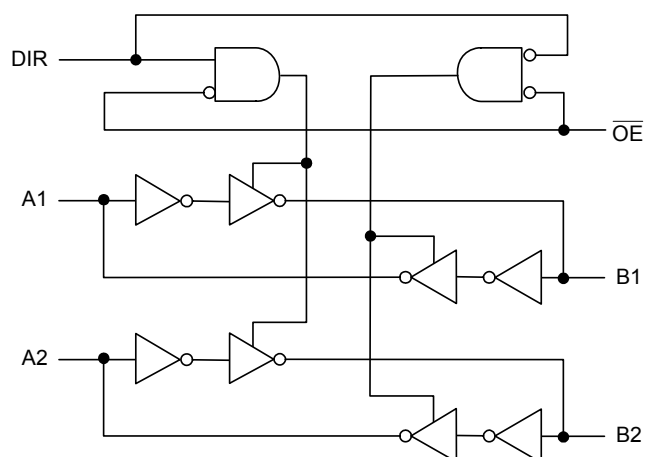

■ **ABSOLUTE MAXIMUM RATING** ($T_A=25^{\circ}\text{C}$, unless otherwise specified) (Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	RATINGS	UNIT
Supply Voltage	V_{CCA}, V_{CCB}		-0.5 ~ 4.6	V
Input Voltage (Note 2)	V_{IN}	I/O ports (A port)	-0.5 ~ 4.6	V
		I/O ports (B port)	-0.5 ~ 4.6	V
		Control inputs	-0.5 ~ 4.6	V
Voltage range applied to any output in the high-impedance or power-off state (Note 2)	V_{OUT}	A port	-0.5 ~ 4.6	V
		B port	-0.5 ~ 4.6	V
Voltage range applied to any output in the high or low state (Note 2, 3)	V_{OUT}	A port	-0.5 ~ $V_{CCA}+0.5$	V
		B port	-0.5 ~ $V_{CCB}+0.5$	V
Continuous Output Current	I_{OUT}		± 50	mA
Continuous Current Through V_{CCA}, V_{CCB} or GND	I_{CC}		± 100	mA
Input Clamp Current	I_{IK}	$V_{IN} < 0$	-50	mA
Output Clamp Current	I_{OK}	$V_{OUT} < 0$	-50	mA
Storage Temperature Range	T_{STG}		-65 ~ +150	$^{\circ}\text{C}$

- Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.
2. The input voltage and output negative-voltage ratings may be exceeded if the input and output current ratings are observed.
3. The output positive-voltage rating may be exceeded up to 4.6V maximum if the output current rating is observed.

■ **RECOMMENDED OPERATING CONDITIONS** ($T_A=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage	V_{CCA}, V_{CCB}		1.2		3.6	V
Input Voltage	V_{IN}		0		3.6	V
Output Voltage	V_{OUT}	Active state	0		V_{CC}	V
		3-state	0		3.6	
Input Transition Rise or Fall Rate	$\Delta t/\Delta v$				5	ns/V
Operating Temperature (Note)	T_A		-40		+125	$^{\circ}\text{C}$

■ ELECTRICAL CHARACTERISTICS (Note 1, 2, 3)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
High-level input voltage	Data inputs (Note 4)	V_{IH}	$V_{CCI}=1.2V\sim1.95V$	$V_{CCI}\times 0.65$			V
			$V_{CCI}=1.95V\sim2.7V$	1.6			V
			$V_{CCI}=2.7V\sim3.6V$	2			V
	DIR (Referenced to V_{CCA}) (Note 5)		$V_{CCI}=1.2V\sim1.95V$	$V_{CCA}\times 0.65$			V
			$V_{CCI}=1.95V\sim2.7V$	1.6			V
			$V_{CCI}=2.7V\sim3.6V$	2			V
Low-level output voltage	Data inputs (Note 4)	V_{IL}	$V_{CCI}=1.2V\sim1.95V$			$V_{CCI}\times 0.35$	V
			$V_{CCI}=1.95V\sim2.7V$			0.7	V
			$V_{CCI}=2.7V\sim3.6V$			0.8	V
	DIR (Referenced to V_{CCA}) (Note 5)		$V_{CCI}=1.2V\sim1.95V$			$V_{CCA}\times 0.35$	V
			$V_{CCI}=1.95V\sim2.7V$			0.7	V
			$V_{CCI}=2.7V\sim3.6V$			0.8	V
High-Level Output Voltage		V_{OH}	$V_{CCA}=V_{CCB}=1.2V\sim3.6V$ $I_{OH}=-100\mu A$, $V_I=V_{IH}$	$V_{CCA}-0.2$			V
			$V_{CCA}=V_{CCB}=1.2V$ $I_{OH}=-3mA$, $V_I=V_{IH}$		0.95		V
			$V_{CCA}=V_{CCB}=1.4V$ $I_{OH}=-6mA$, $V_I=V_{IH}$	1.05			V
			$V_{CCA}=V_{CCB}=1.65V$ $I_{OH}=-8mA$, $V_I=V_{IH}$	1.2			V
			$V_{CCA}=V_{CCB}=2.3V$ $I_{OH}=-9mA$, $V_I=V_{IH}$	1.75			V
			$V_{CCA}=V_{CCB}=3.0V$ $I_{OH}=-12mA$, $V_I=V_{IH}$	2.3			V
			Low-Level Output Voltage	V_{OL}	$V_{CCA}=V_{CCB}=1.2V\sim3.6V$ $I_{OL}=100\mu A$, $V_I=V_{IL}$		
$V_{CCA}=V_{CCB}=1.2V$ $I_{OL}=3mA$, $V_I=V_{IL}$		0.25				V	
$V_{CCA}=V_{CCB}=1.4V$ $I_{OL}=6mA$, $V_I=V_{IL}$					0.35	V	
$V_{CCA}=V_{CCB}=1.65V$ $I_{OL}=8mA$, $V_I=V_{IL}$					0.45	V	
$V_{CCA}=V_{CCB}=2.3V$ $I_{OL}=9mA$, $V_I=V_{IL}$					0.55	V	
$V_{CCA}=V_{CCB}=3.0V$ $I_{OL}=12mA$, $V_I=V_{IL}$					0.7	V	
Input Leakage Current	Control inputs	$I_{I(LEAK)}$			$V_{CCA}=V_{CCB}=1.2\sim3.6V$ $V_{IN}=V_{CCA}$ or GND		± 0.025
Power OFF Leakage Current	A or B port	I_{OFF}	$V_{CCA}=0V$, $V_{CCB}=0\sim3.6V$ V_{IN} or $V_{OUT}=0\sim3.6V$		± 0.1	± 1	μA
			$V_{CCA}=0\sim3.6V$, $V_{CCB}=0V$ V_{IN} or $V_{OUT}=0\sim3.6V$		± 0.1	± 1	μA
Output OFF-state current	A or B port	I_{OZ}	$V_{CCA}=V_{CCB}=3.6V$ $V_{OUT}=V_{CCO}$ or GND $V_{IN}=V_{CCI}$ or GND, $\overline{OE}=V_{IH}$		± 0.5	± 2.5	μA

■ ELECTRICAL CHARACTERISTICS (Cont.)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Quiescent Supply Current		I_{CCA}	$V_{CCA}=V_{CCB}=1.2\sim 3.6V$ $V_{IN}=V_{CCI}$ or GND, $I_O=0$			8	μA
			$V_{CCA}=0V$, $V_{CCB}=0\sim 3.6V$ $V_{IN}=V_{CCI}$ or GND, $I_O=0$	-2			μA
			$V_{CCA}=0\sim 3.6V$, $V_{CCB}=0V$ $V_{IN}=V_{CCI}$ or GND, $I_O=0$			8	μA
Quiescent Supply Current		I_{CCB}	$V_{CCA}=V_{CCB}=1.2\sim 3.6V$ $V_{IN}=V_{CCI}$ or GND, $I_O=0$			8	μA
			$V_{CCA}=0V$, $V_{CCB}=0\sim 3.6V$ $V_{IN}=V_{CCI}$ or GND, $I_O=0$			8	μA
			$V_{CCA}=0\sim 3.6V$, $V_{CCB}=0V$ $V_{IN}=V_{CCI}$ or GND, $I_O=0$	-2			μA
Quiescent Supply Current & Quiescent Supply Current		$I_{CCA}+I_{CCB}$	$V_{CCA}=V_{CCB}=1.2\sim 3.6V$ $V_{IN}=V_{CCI}$ or GND, $I_O=0$			16	μA
Input Capacitance	Control inputs	C_{IN}	$V_{CCA}=V_{CCB}=3.3V$ $V_{IN}=3.3V$ or GND		3.5		pF
Output Capacitance	A or B port	C_{IO}	$V_{CCA}=V_{CCB}=3.3V$ $V_{IN}=3.3V$ or GND		6		pF

Notes: 1. V_{CCI} is the V_{CC} associated with the input port.

2. V_{CCO} is the V_{CC} associated with the output port.

3. All unused data inputs of the device must be held at V_{CCI} or GND to ensure proper device operation.

4. For V_{CCI} values not specified in the data sheet, $V_{IHMIN}=V_{CCI}\times 0.7V$, $V_{ILMAX}=V_{CCI}\times 0.3V$

5. For V_{CCI} values not specified in the data sheet, $V_{IHMIN}=V_{CCA}\times 0.7V$, $V_{ILMAX}=V_{CCA}\times 0.3V$

■ SWITCHING CHARACTERISTICS

(Over recommended operating free-air temperature range, $V_{CCA}=1.2V$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Propagation delay from input (A) to output (B)	t_{PLH} t_{PHL}	$V_{CCB}=1.2V$		3.4		ns
		$V_{CCB}=1.5V\pm0.1V$		2.9		ns
		$V_{CCB}=1.8V\pm0.15V$		2.7		ns
		$V_{CCB}=2.5V\pm0.2V$		2.6		ns
		$V_{CCB}=3.3V\pm0.3V$		2.8		ns
Propagation delay from input (B) to output (A)	t_{PLH} t_{PHL}	$V_{CCB}=1.2V$		3.6		ns
		$V_{CCB}=1.5V\pm0.1V$		3.1		ns
		$V_{CCB}=1.8V\pm0.15V$		2.8		ns
		$V_{CCB}=2.5V\pm0.2V$		2.6		ns
		$V_{CCB}=3.3V\pm0.3V$		2.6		ns
Propagation delay from input ($\overline{OE}$) to output (A)	t_{PZH} t_{PZL}	$V_{CCB}=1.2V$		5.6		ns
		$V_{CCB}=1.5V\pm0.1V$		4.7		ns
		$V_{CCB}=1.8V\pm0.15V$		4.3		ns
		$V_{CCB}=2.5V\pm0.2V$		3.9		ns
		$V_{CCB}=3.3V\pm0.3V$		3.7		ns
Propagation delay from input ($\overline{OE}$) to output (B)	t_{PZH} t_{PZL}	$V_{CCB}=1.2V$		5.0		ns
		$V_{CCB}=1.5V\pm0.1V$		4.3		ns
		$V_{CCB}=1.8V\pm0.15V$		3.9		ns
		$V_{CCB}=2.5V\pm0.2V$		3.6		ns
		$V_{CCB}=3.3V\pm0.3V$		3.6		ns
Propagation delay from input ($\overline{OE}$) to output (A)	t_{PHZ} t_{PLZ}	$V_{CCB}=1.2V$		6.2		ns
		$V_{CCB}=1.5V\pm0.1V$		5.2		ns
		$V_{CCB}=1.8V\pm0.15V$		5.2		ns
		$V_{CCB}=2.5V\pm0.2V$		4.3		ns
		$V_{CCB}=3.3V\pm0.3V$		4.8		ns
Propagation delay from input ($\overline{OE}$) to output (B)	t_{PHZ} t_{PLZ}	$V_{CCB}=1.2V$		5.9		ns
		$V_{CCB}=1.5V\pm0.1V$		5.1		ns
		$V_{CCB}=1.8V\pm0.15V$		5.0		ns
		$V_{CCB}=2.5V\pm0.2V$		4.7		ns
		$V_{CCB}=3.3V\pm0.3V$		5.5		ns

■ SWITCHING CHARACTERISTICS (Cont.)

(Over recommended operating free-air temperature range, $V_{CCA}=1.5V\pm0.1V$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Propagation delay from input (A) to output (B)	t_{PLH} t_{PHL}	$V_{CCB}=1.2V$		3.2		ns
		$V_{CCB}=1.5V\pm0.1V$	0.3		7.0	ns
		$V_{CCB}=1.8V\pm0.15V$	0.3		5.8	ns
		$V_{CCB}=2.5V\pm0.2V$	0.4		4.7	ns
		$V_{CCB}=3.3V\pm0.3V$	0.4		4.7	ns
Propagation delay from input (B) to output (A)	t_{PLH} t_{PHL}	$V_{CCB}=1.2V$		3.3		ns
		$V_{CCB}=1.5V\pm0.1V$	0.7		7.0	ns
		$V_{CCB}=1.8V\pm0.15V$	0.5		6.6	ns
		$V_{CCB}=2.5V\pm0.2V$	0.4		6.3	ns
		$V_{CCB}=3.3V\pm0.3V$	0.3		6.2	ns
Propagation delay from input ($\overline{OE}$) to output (A)	t_{PZH} t_{PZL}	$V_{CCB}=1.2V$		4.9		ns
		$V_{CCB}=1.5V\pm0.1V$	1.4		11.3	ns
		$V_{CCB}=1.8V\pm0.15V$	1.1		11.3	ns
		$V_{CCB}=2.5V\pm0.2V$	0.7		11.3	ns
		$V_{CCB}=3.3V\pm0.3V$	0.4		11.3	ns
Propagation delay from input ($\overline{OE}$) to output (B)	t_{PZH} t_{PZL}	$V_{CCB}=1.2V$		4.5		ns
		$V_{CCB}=1.5V\pm0.1V$	1.4		11.4	ns
		$V_{CCB}=1.8V\pm0.15V$	1.1		10.1	ns
		$V_{CCB}=2.5V\pm0.2V$	0.9		8.2	ns
		$V_{CCB}=3.3V\pm0.3V$	0.9		8.4	ns
Propagation delay from input ($\overline{OE}$) to output (A)	t_{PHZ} t_{PLZ}	$V_{CCB}=1.2V$		5.6		ns
		$V_{CCB}=1.5V\pm0.1V$	1.8		10.4	ns
		$V_{CCB}=1.8V\pm0.15V$	1.5		10.4	ns
		$V_{CCB}=2.5V\pm0.2V$	1.3		10.4	ns
		$V_{CCB}=3.3V\pm0.3V$	1.6		10.4	ns
Propagation delay from input ($\overline{OE}$) to output (B)	t_{PHZ} t_{PLZ}	$V_{CCB}=1.2V$		5.2		ns
		$V_{CCB}=1.5V\pm0.1V$	1.9		10.6	ns
		$V_{CCB}=1.8V\pm0.15V$	1.9		9.1	ns
		$V_{CCB}=2.5V\pm0.2V$	1.4		7.4	ns
		$V_{CCB}=3.3V\pm0.3V$	1.2		7.6	ns

SWITCHING CHARACTERISTICS (Cont.)

(Over recommended operating free-air temperature range, $V_{CCA}=1.8V\pm0.15V$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Propagation delay from input (A) to output (B)	t_{PLH} t_{PHL}	$V_{CCB}=1.2V$		2.9		ns
		$V_{CCB}=1.5V\pm0.1V$	0.1		6.6	ns
		$V_{CCB}=1.8V\pm0.15V$	0.1		5.4	ns
		$V_{CCB}=2.5V\pm0.2V$	0.1		4.3	ns
		$V_{CCB}=3.3V\pm0.3V$	0.3		4.3	ns
Propagation delay from input (B) to output (A)	t_{PLH} t_{PHL}	$V_{CCB}=1.2V$		3.0		ns
		$V_{CCB}=1.5V\pm0.1V$	0.6		5.9	ns
		$V_{CCB}=1.8V\pm0.15V$	0.5		5.4	ns
		$V_{CCB}=2.5V\pm0.2V$	0.3		5.1	ns
		$V_{CCB}=3.3V\pm0.3V$	0.3		5.0	ns
Propagation delay from input ($\overline{OE}$) to output (A)	t_{PZH} t_{PZL}	$V_{CCB}=1.2V$		4.4		ns
		$V_{CCB}=1.5V\pm0.1V$	1.0		9.5	ns
		$V_{CCB}=1.8V\pm0.15V$	1.0		9.5	ns
		$V_{CCB}=2.5V\pm0.2V$	0.6		9.5	ns
		$V_{CCB}=3.3V\pm0.3V$	0.4		9.5	ns
Propagation delay from input ($\overline{OE}$) to output (B)	t_{PZH} t_{PZL}	$V_{CCB}=1.2V$		4.1		ns
		$V_{CCB}=1.5V\pm0.1V$	1.2		10.9	ns
		$V_{CCB}=1.8V\pm0.15V$	1.0		9.6	ns
		$V_{CCB}=2.5V\pm0.2V$	0.8		7.6	ns
		$V_{CCB}=3.3V\pm0.3V$	0.8		7.6	ns
Propagation delay from input ($\overline{OE}$) to output (A)	t_{PHZ} t_{PLZ}	$V_{CCB}=1.2V$		5.4		ns
		$V_{CCB}=1.5V\pm0.1V$	1.6		8.6	ns
		$V_{CCB}=1.8V\pm0.15V$	1.8		8.7	ns
		$V_{CCB}=2.5V\pm0.2V$	1.3		8.7	ns
		$V_{CCB}=3.3V\pm0.3V$	1.6		8.7	ns
Propagation delay from input ($\overline{OE}$) to output (B)	t_{PHZ} t_{PLZ}	$V_{CCB}=1.2V$		5.0		ns
		$V_{CCB}=1.5V\pm0.1V$	1.7		10.2	ns
		$V_{CCB}=1.8V\pm0.15V$	1.6		8.7	ns
		$V_{CCB}=2.5V\pm0.2V$	1.2		6.9	ns
		$V_{CCB}=3.3V\pm0.3V$	1.0		6.9	ns

■ SWITCHING CHARACTERISTICS (Cont.)

(Over recommended operating free-air temperature range, $V_{CCA}=2.5V\pm0.2V$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Propagation delay from input (A) to output (B)	t_{PLH} t_{PHL}	$V_{CCB}=1.2V$		2.8		ns
		$V_{CCB}=1.5V\pm0.1V$	0.1		6.3	ns
		$V_{CCB}=1.8V\pm0.15V$	0.1		5.1	ns
		$V_{CCB}=2.5V\pm0.2V$	0.2		4.0	ns
		$V_{CCB}=3.3V\pm0.3V$	0.1		4.0	ns
Propagation delay from input (B) to output (A)	t_{PLH} t_{PHL}	$V_{CCB}=1.2V$		2.7		ns
		$V_{CCB}=1.5V\pm0.1V$	0.6		4.7	ns
		$V_{CCB}=1.8V\pm0.15V$	0.4		4.3	ns
		$V_{CCB}=2.5V\pm0.2V$	0.2		3.9	ns
		$V_{CCB}=3.3V\pm0.3V$	0.2		3.8	ns
Propagation delay from input ($\overline{OE}$) to output (A)	t_{PZH} t_{PZL}	$V_{CCB}=1.2V$		4.0		ns
		$V_{CCB}=1.5V\pm0.1V$	0.7		6.9	ns
		$V_{CCB}=1.8V\pm0.15V$	0.7		6.9	ns
		$V_{CCB}=2.5V\pm0.2V$	0.6		6.9	ns
		$V_{CCB}=3.3V\pm0.3V$	0.4		6.9	ns
Propagation delay from input ($\overline{OE}$) to output (B)	t_{PZH} t_{PZL}	$V_{CCB}=1.2V$		3.8		ns
		$V_{CCB}=1.5V\pm0.1V$	0.9		10.4	ns
		$V_{CCB}=1.8V\pm0.15V$	0.8		9.1	ns
		$V_{CCB}=2.5V\pm0.2V$	0.6		6.9	ns
		$V_{CCB}=3.3V\pm0.3V$	0.6		5.8	ns
Propagation delay from input ($\overline{OE}$) to output (A)	t_{PHZ} t_{PLZ}	$V_{CCB}=1.2V$		4.7		ns
		$V_{CCB}=1.5V\pm0.1V$	1.0		8.4	ns
		$V_{CCB}=1.8V\pm0.15V$	1.0		8.4	ns
		$V_{CCB}=2.5V\pm0.2V$	1.0		6.2	ns
		$V_{CCB}=3.3V\pm0.3V$	1.0		6.6	ns
Propagation delay from input ($\overline{OE}$) to output (B)	t_{PHZ} t_{PLZ}	$V_{CCB}=1.2V$		4.5		ns
		$V_{CCB}=1.5V\pm0.1V$	1.5		9.4	ns
		$V_{CCB}=1.8V\pm0.15V$	1.3		8.2	ns
		$V_{CCB}=2.5V\pm0.2V$	1.1		6.2	ns
		$V_{CCB}=3.3V\pm0.3V$	0.9		5.2	ns

■ SWITCHING CHARACTERISTICS (Cont.)

(Over recommended operating free-air temperature range, $V_{CCA}=3.3V\pm0.3V$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Propagation delay from input (A) to output (B)	t_{PLH} t_{PHL}	$V_{CCB}=1.2V$		2.9		ns
		$V_{CCB}=1.5V\pm0.1V$	0.1		6.2	ns
		$V_{CCB}=1.8V\pm0.15V$	0.1		5.0	ns
		$V_{CCB}=2.5V\pm0.2V$	0.1		3.8	ns
		$V_{CCB}=3.3V\pm0.3V$	0.1		3.3	ns
Propagation delay from input (B) to output (A)	t_{PLH} t_{PHL}	$V_{CCB}=1.2V$		2.6		ns
		$V_{CCB}=1.5V\pm0.1V$	0.6		4.7	ns
		$V_{CCB}=1.8V\pm0.15V$	0.4		3.9	ns
		$V_{CCB}=2.5V\pm0.2V$	0.2		3.4	ns
		$V_{CCB}=3.3V\pm0.3V$	0.1		3.3	ns
Propagation delay from input ($\overline{OE}$) to output (A)	t_{PZH} t_{PZL}	$V_{CCB}=1.2V$		3.8		ns
		$V_{CCB}=1.5V\pm0.1V$	0.6		8.7	ns
		$V_{CCB}=1.8V\pm0.15V$	0.6		6.2	ns
		$V_{CCB}=2.5V\pm0.2V$	0.6		6.2	ns
		$V_{CCB}=3.3V\pm0.3V$	0.4		6.2	ns
Propagation delay from input ($\overline{OE}$) to output (B)	t_{PZH} t_{PZL}	$V_{CCB}=1.2V$		3.7		ns
		$V_{CCB}=1.5V\pm0.1V$	0.8		10.3	ns
		$V_{CCB}=1.8V\pm0.15V$	0.6		9.0	ns
		$V_{CCB}=2.5V\pm0.2V$	0.5		7.1	ns
		$V_{CCB}=3.3V\pm0.3V$	0.5		6.9	ns
Propagation delay from input ($\overline{OE}$) to output (A)	t_{PHZ} t_{PLZ}	$V_{CCB}=1.2V$		4.8		ns
		$V_{CCB}=1.5V\pm0.1V$	0.7		9.3	ns
		$V_{CCB}=1.8V\pm0.15V$	0.7		8.3	ns
		$V_{CCB}=2.5V\pm0.2V$	0.7		5.6	ns
		$V_{CCB}=3.3V\pm0.3V$	0.7		6.6	ns
Propagation delay from input ($\overline{OE}$) to output (B)	t_{PHZ} t_{PLZ}	$V_{CCB}=1.2V$		5.3		ns
		$V_{CCB}=1.5V\pm0.1V$	1.4		9.6	ns
		$V_{CCB}=1.8V\pm0.15V$	1.2		8.1	ns
		$V_{CCB}=2.5V\pm0.2V$	1.0		6.4	ns
		$V_{CCB}=3.3V\pm0.3V$	0.8		6.2	ns

■ **OPERATING CHARACTERISTIC** ($C_L=0$, $f=10\text{MHz}$, $t_r=t_f=1\text{ns}$, $T_A=25^\circ\text{C}$, unless otherwise specified)


PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Power Dissipation Capacitance (A to B)	Outputs enabled	C _{PDA}	V _{CCA} =V _{CCB} =1.2V		1		pF
			V _{CCA} =V _{CCB} =1.5V		1		pF
			V _{CCA} =V _{CCB} =1.8V		1		pF
			V _{CCA} =V _{CCB} =2.5V		1.5		pF
			V _{CCA} =V _{CCB} =3.3V		2		pF
	Outputs disabled		V _{CCA} =V _{CCB} =1.2V		1		pF
			V _{CCA} =V _{CCB} =1.5V		1		pF
			V _{CCA} =V _{CCB} =1.8V		1		pF
			V _{CCA} =V _{CCB} =2.5V		1		pF
			V _{CCA} =V _{CCB} =3.3V		1		pF
Power Dissipation Capacitance (B to A)	Outputs enabled		V _{CCA} =V _{CCB} =1.2V		12		pF
			V _{CCA} =V _{CCB} =1.5V		12.5		pF
			V _{CCA} =V _{CCB} =1.8V		13		pF
			V _{CCA} =V _{CCB} =2.5V		14		pF
			V _{CCA} =V _{CCB} =3.3V		15		pF
	Outputs disabled		V _{CCA} =V _{CCB} =1.2V		1		pF
			V _{CCA} =V _{CCB} =1.5V		1		pF
			V _{CCA} =V _{CCB} =1.8V		1		pF
			V _{CCA} =V _{CCB} =2.5V		1		pF
			V _{CCA} =V _{CCB} =3.3V		1		pF
Power Dissipation Capacitance (A to B)	Outputs enabled	C _{PDB}	V _{CCA} =V _{CCB} =1.2V		12		pF
			V _{CCA} =V _{CCB} =1.5V		12.5		pF
			V _{CCA} =V _{CCB} =1.8V		13		pF
			V _{CCA} =V _{CCB} =2.5V		14		pF
			V _{CCA} =V _{CCB} =3.3V		15		pF
	Outputs disabled		V _{CCA} =V _{CCB} =1.2V		1		pF
			V _{CCA} =V _{CCB} =1.5V		1		pF
			V _{CCA} =V _{CCB} =1.8V		1		pF
			V _{CCA} =V _{CCB} =2.5V		1		pF
			V _{CCA} =V _{CCB} =3.3V		1		pF
Power Dissipation Capacitance (B to A)	Outputs enabled		V _{CCA} =V _{CCB} =1.2V		1		pF
			V _{CCA} =V _{CCB} =1.5V		1		pF
			V _{CCA} =V _{CCB} =1.8V		1		pF
			V _{CCA} =V _{CCB} =2.5V		1		pF
			V _{CCA} =V _{CCB} =3.3V		2		pF
	Outputs disabled		V _{CCA} =V _{CCB} =1.2V		1		pF
			V _{CCA} =V _{CCB} =1.5V		1		pF
			V _{CCA} =V _{CCB} =1.8V		1		pF
			V _{CCA} =V _{CCB} =2.5V		1		pF
			V _{CCA} =V _{CCB} =3.3V		1		pF

Note: Power dissipation capacitance per transceiver.

■ APPLICATION INFORMATION

The **U74AVC4T245** device can be used in level-translation applications for interfacing devices or systems operating at different interface voltages with one another. The **U74AVC4T245** device is ideal for use in applications where a push-pull driver is connected to the data I/Os.

■ TYPICAL APPLICATION CIRCUIT

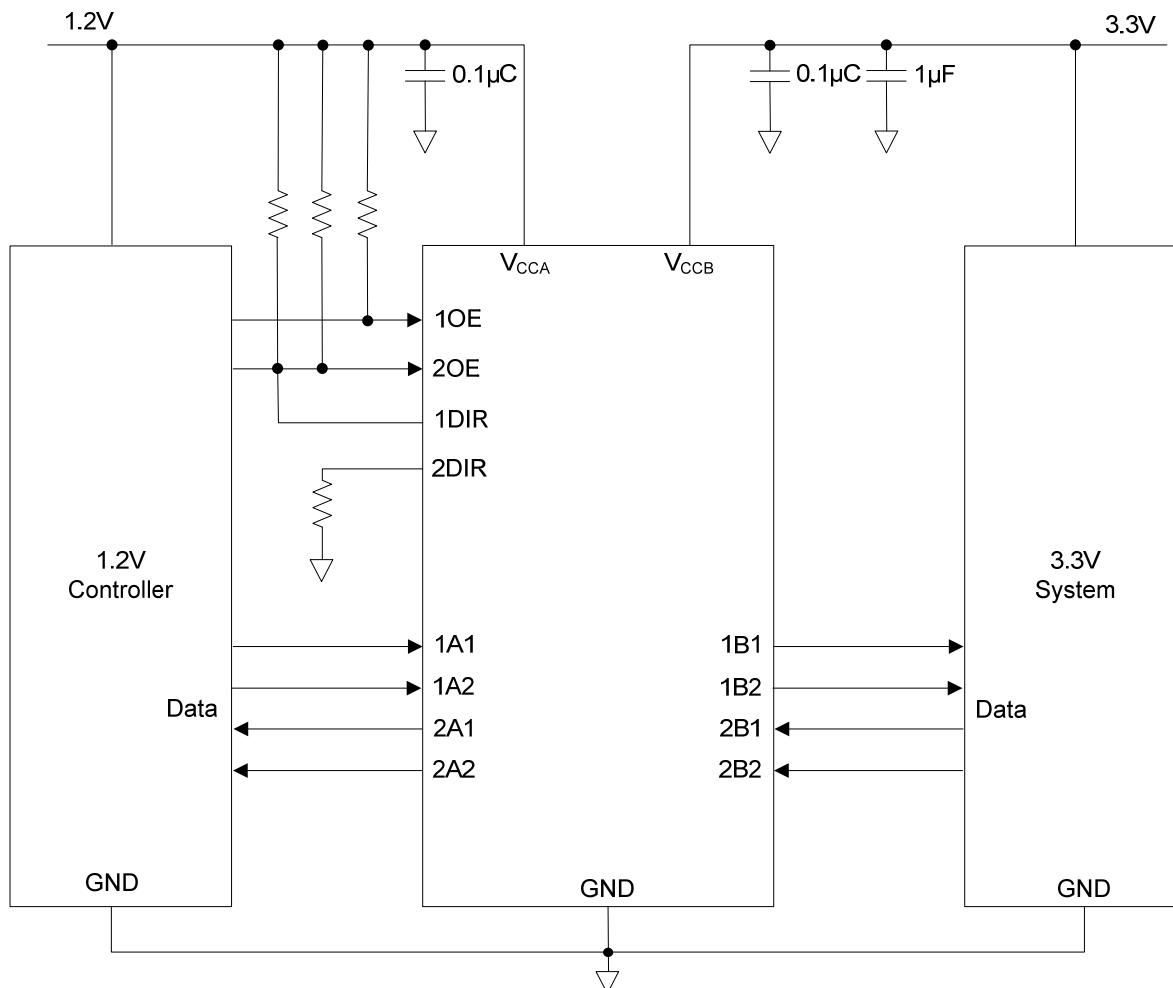


■ POWER SUPPLY RECOMMENDATIONS



The **U74AVC4T245** device uses two separate configurable power-supply rails, V_{CCA} and V_{CCB} . V_{CCA} accepts any supply voltage from 1.2V to 3.6V and V_{CCB} accepts any supply voltage from 1.2V to 3.6V. The A port and B port are designed to track V_{CCA} and V_{CCB} respectively allowing for low-voltage bidirectional translation between any of the 1.2V, 1.5V, 1.8V, 2.5V and 3.3V voltage nodes.

The output-enable ($\overline{OE}$) input circuit is designed so that it is supplied by V_{CCA} and when the $\overline{OE}$ input is high, all outputs are placed in the high-impedance state. To ensure the high-impedance state of the outputs during power up or power down, the $\overline{OE}$ input pin must be tied to V_{CCA} through a pullup resistor and must not be enabled until V_{CCA} and V_{CCB} are fully ramped and stable. The minimum value of the pullup resistor to V_{CCA} is determined by the current-sinking capability of the driver.

■ TEST CIRCUIT AND WAVEFORMS

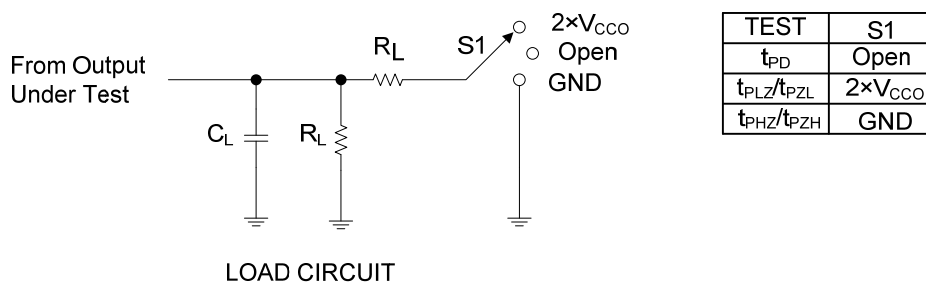


V_{CCO}	C_L	R_L	V_{TP}
1.2V	15pF	2k Ω	0.1V
1.5V $\pm$ 0.1V	15pF	2k Ω	0.1V
1.8V $\pm$ 0.15V	15pF	2k Ω	0.15V
2.5V $\pm$ 0.2V	15pF	2k Ω	0.15V
3.3V $\pm$ 0.3V	15pF	2k Ω	0.3V

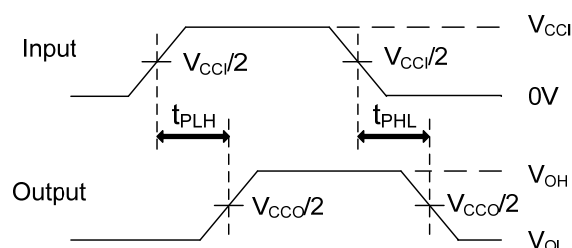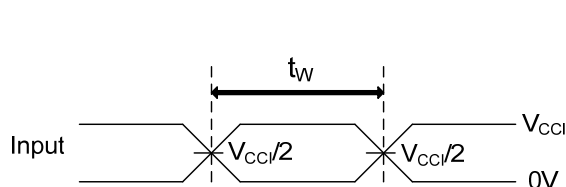

PULSE DURATION

PROPAGATION DELAY TIMES

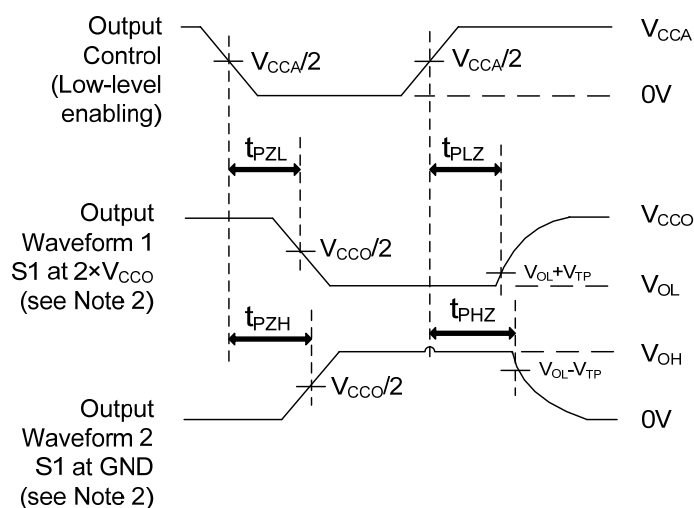

ENABLE AND DISABLE TIMES

Note: C_L includes probe and jig capacitance.

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.