

## LMV7239

CMOS IC

## LOW POWER RAIL-TO-RAIL INPUT COMPARATOR WITH PUSH-PULL OUTPUT

### ■ DESCRIPTION

The UTC **LMV7239** is low power 75-ns comparators. They are ensured to operate over the full supply voltage range of 2.7V to 5.5V. The device achieves a 75ns propagation delay while consuming only 65 $\mu$ A of supply current at 5V.

The UTC **LMV7239** has a greater than rail-to-rail common-mode voltage range. The input common mode voltage range extends 200mV below ground and 200mV above supply, allowing both ground and supply sensing.


The UTC **LMV7239** features a push-pull output stage. This feature allows operation without the need of an external pull-up resistor.

### ■ FEATURES


- \* V<sub>S</sub>=5V, T<sub>A</sub>=25°C (Typical Values Unless Otherwise Specified)
- \* Propagation Delay: 75ns
- \* Low supply Current: 65 $\mu$ A
- \* Rail-to-Rail Input
- \* Push-Pull Output
- \* Ideal for 2.7V and 5V, Single-Supply Applications

### ■ ORDERING INFORMATION


Ordering Number		Package	Packing
Lead Free	Halogen Free		
LMV7239L-AF5-R	LMV7239G-AF5-R	SOT-25	Tape Reel
LMV7239L-AF5-x-R	LMV7239G-AF5-x-R	SOT-25	Tape Reel
LMV7239L-AL5-R	LMV7239G-AL5-R	SOT-353	Tape Reel
LMV7239L-AL5-x-R	LMV7239G-AL5-x-R	SOT-353	Tape Reel

 LMV7239G-AF5-x-R	(1)Packing Type (2)Pin Code (3)Package Type (4)Green Package	(1) R: Tape Reel (2) x: refer to PIN CONFIGURATIONS (3) AF5: SOT-25, AL5: SOT-353 (4) G: Halogen Free and Lead Free, L: Lead Free
---	---	--

### ■ MARKING

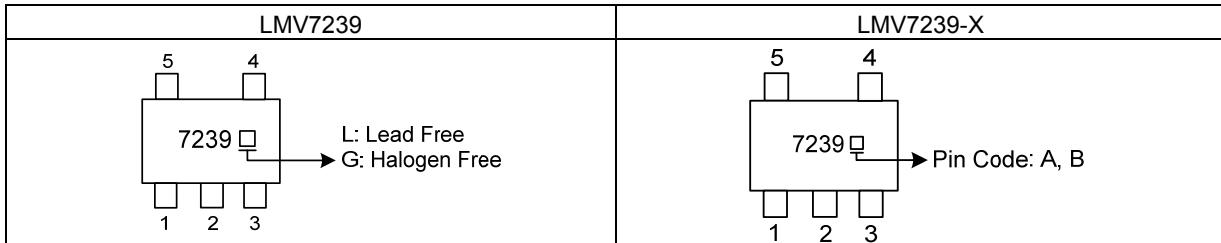


### ■ PIN CONFIGURATION

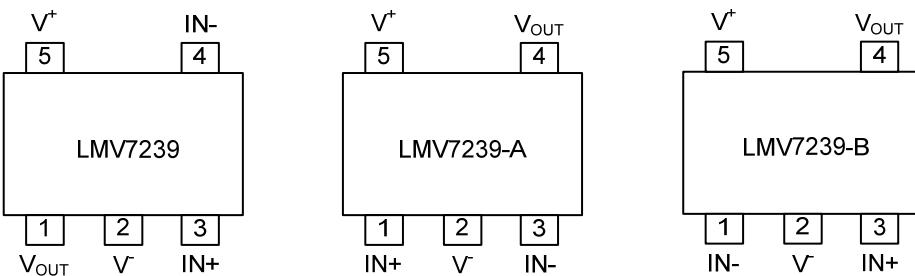

### ■ PIN DESCRIPTION

PIN NAME	DESCRIPTION
V <sub>OUT</sub>	Output
V <sup>-</sup>	Negative Supply
IN+	Non-inverting Input
IN-	Inverting Input
V <sup>+</sup>	Positive Supply

### ■ BLOCK DIAGRAM

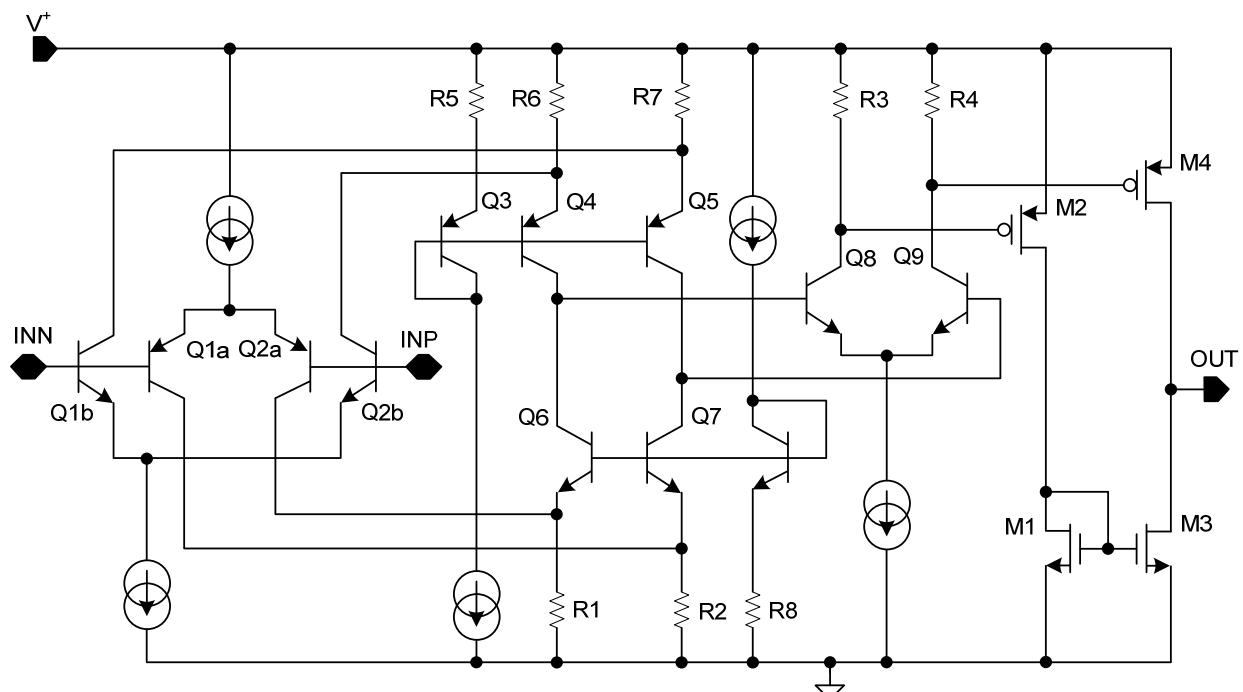

■ ABSOLUTE MAXIMUM RATING ( $T_A=25^\circ\text{C}$ , unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage ( $V^+ - V^-$ )	$V_S$	6	V
Differential Input Voltage		$\pm$ Supply Voltage	V
Output Short Circuit Duration		See (Note 2)	
<b>SOLDERING INFORMATION</b>			
Voltage at Input/Output Pins		$(V^+) + 0.3$ , $(V^-) - 0.3$	V
Current at Input Pin (Note 2)		$\pm 10$	mA
Junction Temperature	$T_J$	+150	$^\circ\text{C}$
Storage Temperature	$T_{STG}$	-65 ~ +150	$^\circ\text{C}$

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.  
     Absolute maximum ratings are stress ratings only and functional device operation is not implied.  
     2. Applies to both single-supply and split-supply operation. Continuous short circuit operation at elevated ambient temperature can result in exceeding the maximum allowed junction temperature of  $150^\circ\text{C}$ . Output currents in excess of  $\pm 30\text{mA}$  over long term may adversely affect reliability.  
     3. Limiting input pin current is only necessary for input voltages that exceed absolute maximum input voltage ratings.

■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage ( $V^+ - V^-$ )	$V_S$	2.7 ~ 5.5	V
Temperature Range	$T_A$	-40 ~ +85	$^\circ\text{C}$

■ 5V ELECTRICAL CHARACTERISTICS

( $V_{CM}=V^+/2$ ,  $V^+=5\text{V}$ ,  $V^- = 0\text{V}$ ,  $T_A=25^\circ\text{C}$ , unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input Offset Voltage	$V_{OS}$		-6	$\pm 1$	+6	mV
Input Bias Current	$I_B$			30	400	nA
Input Offset Current	$I_{OS}$			5	200	nA
Common-Mode Rejection Ratio	CMRR	$0\text{V} < V_{CM} < 5\text{V}$	52	67		dB
Power Supply Rejection Ratio	PSRR	$V^+ = 2.7\text{V} \sim 5\text{V}$	65	85		dB
Input Common-Mode Voltage Range	$V_{CM}$	CMRR > 50dB	$V^- - 0.1$	-0.2~ 5.2	$V^+ + 0.1$	V
Output Swing High	$V_O$	$I_L = 4\text{mA}$ , $V_{ID} = 500\text{mV}$	$V^+ - 0.25$	$V^+ - 0.15$		V
Output Swing Low		$I_L = 0.4\text{mA}$ , $V_{ID} = 500\text{mV}$		$V^+ - 0.01$		V
		$I_L = -4\text{mA}$ , $V_{ID} = -500\text{mV}$		230	350	mV
		$I_L = -0.4\text{mA}$ , $V_{ID} = -500\text{mV}$		10		mV
Output Short Circuit Current	$I_{SC}$	Sourcing, $V_O = 0\text{V}$	25	57		mA
		Sinking, $V_O = 5\text{V}$	30	47		mA
Supply Current	$I_S$	No load		65	95	$\mu\text{A}$
Propagation Delay	$t_{PD}$	Overdrive = 20mV, $C_{LOAD} = 15\text{pF}$		88		ns
		Overdrive = 50mV, $C_{LOAD} = 15\text{pF}$		82		ns
		Overdrive = 100mV, $C_{LOAD} = 15\text{pF}$		78		ns
Propagation Delay Skew	$t_{SKREW}$	Overdrive = 20mV (Note 1)		8		ns
Output Rise Time	$t_r$	10%~90%		1.2		ns
Output Fall Time	$t_f$	90%~10%		1.2		ns

Note: Propagation Delay Skew is defined as the absolute value of the difference between  $t_{PDHL}$  and  $t_{PDLH}$ .

■ 2.7V ELECTRICAL CHARACTERISTICS

( $V_{CM}=V^+/2$ ,  $V^+=2.7V$ ,  $V=0V$ ,  $T_A=25^\circ C$ , unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input Offset Voltage	$V_{OS}$		-6	$\pm 0.8$	+6	mV
Input Bias Current	$I_B$			30	400	nA
Input Offset Current	$I_{OS}$			5	200	nA
Common-Mode Rejection Ratio	CMRR	$0V < V_{CM} < 2.7V$ (Note 1)	52	62		dB
Power Supply Rejection Ratio	PSRR	$V^+ = 2.7V \sim 5V$	65	85		dB
Input Common-Mode Voltage Range	$V_{CM}$	CMRR > 50dB	$V^- - 0.1$	-0.2~2.9	$V^+ + 0.1$	V
Output Swing High	$V_O$	$I_L = 4mA$ , $V_{ID} = 500mV$	$V^+ - 0.35$	$V^+ - 0.26$		V
Output Swing Low		$I_L = 0.4mA$ , $V_{ID} = 500mV$		$V^+ - 0.02$		V
		$I_L = -4mA$ , $V_{ID} = -500mV$		230	350	mV
		$I_L = -0.4mA$ , $V_{ID} = -500mV$		15		mV
Output Short Circuit Current	$I_{SC}$	Sourcing, $V_O = 0V$		16		mA
		Sinking, $V_O = 2.7V$		13.1		mA
Supply Current	$I_S$	No load		52	85	$\mu A$
Propagation Delay	$t_{PD}$	Overdrive=20mV, $C_{LOAD} = 15pF$		90.5		ns
		Overdrive=50mV, $C_{LOAD} = 15pF$		87		ns
		Overdrive=100mV, $C_{LOAD} = 15pF$		85		ns
Propagation Delay Skew	$t_{SKEW}$	Overdrive=20mV (Note 2)		30		ns
Output Rise Time	$t_r$	10%~90%		1.7		ns
Output Fall Time	$t_f$	90%~10%		1.7		ns

Notes: 1. CMRR is not linear over the common mode range. Limits are guaranteed over the worst case from 0 to  $V_{CC}/2$  or  $V_{CC}/2$  to  $V_{CC}$ .

2. Propagation Delay Skew is defined as the absolute value of the difference between  $t_{PDH}$  and  $t_{PDHL}$ .

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

