


SS22AS THRU SS220AS

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 20 to 200 Volts Forward Current - 2.0 Amperes

SMAS

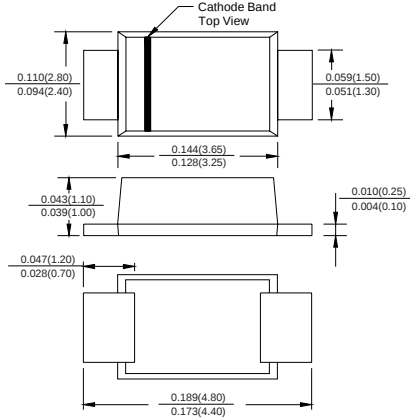

Dimensions in inches and (millimeters)

FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ For surface mounted applications
- ◆ Metal silicon junction, majority carrier conduction
- ◆ Low power loss, high efficiency
- ◆ Built-in strain relief, ideal for automated placement
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 260°C/10 seconds at terminals

MECHANICAL DATA

Case: SMAS molded plastic body

Terminals: leads solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.0011 ounce, 0.029 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.


	SYMBOLS	SS22AS	SS23AS	SS24AS	SS25AS	SS26AS	SS28AS	SS210AS	SS215AS	SS220AS	UNITS	
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	50	60	80	100	150	200	V	
Maximum RMS voltage	V _{RMS}	14	21	28	35	42	56	70	105	140	V	
Maximum DC blocking voltage	V _{DC}	20	30	40	50	60	80	100	150	200	V	
Maximum average forward rectified current at T _L (see fig.1)	I _(AV)	2.0									A	
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load	I _{FSM}	50.0									A	
Maximum instantaneous forward voltage at 2.0A	V _F	0.55			0.70		0.85		0.95		V	
Maximum DC reverse current T _A =25°C	I _R	0.5						0.1			mA	
at rated DC blocking voltage T _A =100°C		10.0						5.0		2.0		
Typical junction capacitance (NOTE 1)	C _J	220			180							pF
Typical thermal resistance (NOTE 2)	R _{θJA}	95.0									°C/W	
	R _{θJL}	16.0										
Operating junction temperature range	T _J	-55 to +125						-55 to +150			°C	
Storage temperature range	T _{STG}	-55 to +150									°C	

Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.



2. P.C.B. mounted with 0.2x0.2" (5.0x5.0mm) copper pad areas

RATINGS AND CHARACTERISTIC CURVES SS22AS THRU SS220AS



AVERAGE FORWARD RECTIFIED CURRENT,
AMPERES

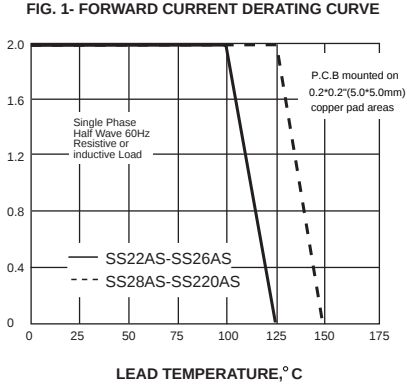

PEAK FORWARD SURGE CURRENT,
AMPERES

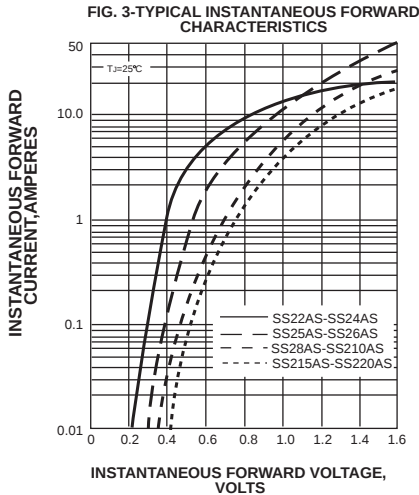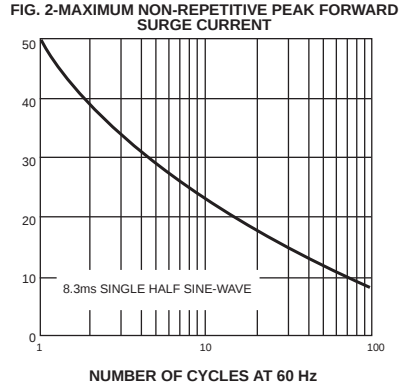

INSTANTANEOUS REVERSE CURRENT,
MILLIAMPERES

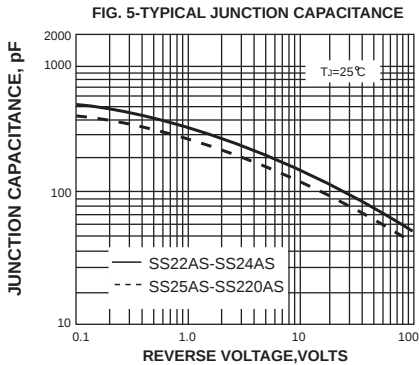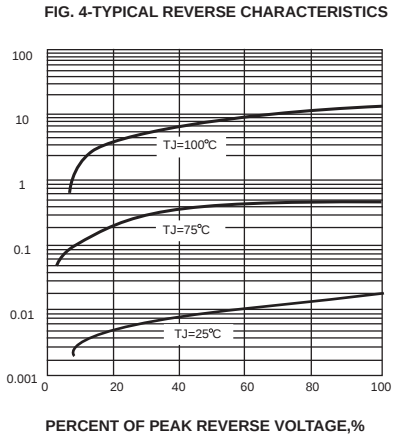

TRANSIENT THERMAL IMPEDANCE,
°C/W

