

EL 2820 LED

2820-C02001H-AM

Preliminary

Features

- Package : SMD package
- Color Temperature range : 5389K~6682K
- Typ. Luminous Flux : 81lm @ 200mA
- Viewing angle : 120°
- ESD : 8KV
- MSL : 2
- Qualified AEC-Q102
- Compliance with RoHS and REACH
- Compliance Halogen Free .(Br <900 ppm ,Cl <900 ppm , Br+Cl < 1500 ppm)



Applications

- Automotive exterior lighting

Contents

1.	CHARACTERISTICS	3
2.	ABSOLUTE MAXIMUM RATINGS	4
3.	MECHANICAL DIMENSION.....	5
4.	RECOMMENDED SOLDERING PAD	6
5.	BINNING INFORMATION.....	7
6.	CHARACTERISTICS GRAPH	10
7.	PART NUMBER	15
8.	ORDERING INFORMATION	16
9.	REFLOW SOLDERING PROFILE.....	17
10.	PACKAGING INFORMATION	18
11.	PRECAUTION FOR USE	20

1. Characteristics

Parameter		Symbol	Min.	Typ.	Max.	Unit	Condition
Forward Current		I_F	20	200	350	mA	---
Luminous Flux		I_v	60	81	100	lm	$I_F=200\text{mA}$
Forward Voltage		V_F	2.75	3.12	3.75	V	$I_F=200\text{mA}$
Viewing Angle		φ	---	120	---	deg	$I_F=200\text{mA}$
Color Temperature		CCT	5389	6000	6682	K	$I_F=200\text{mA}$
Thermal Resistance (Junction to Solder)	Real	$R_{th\ JS\ real}$	---	20	22	K/W	$I_F=200\text{mA}$
	Electrical	$R_{th\ JS\ el}$	---	---	16		


Notes:

1. Luminous flux measurement tolerance: $\pm 8\%$.
2. The data of luminous flux measured at thermal pad= 25°C
3. Forward voltage measurement tolerance: $\pm 0.05\text{V}$
4. Tolerance of Dominant Wavelength : $\pm 1\text{nm}$.
5. Current pulse time: 25ms

2. Absolute Maximum Ratings

Parameter	Symbol	Ratings	Unit
Power Dissipation	P_d	945	mW
Forward Current	I_F	350	mA
Surge Current ($t \leq 10 \mu s$; $D=0.005$; $T_s=25^\circ C$)	I_{FM}	N/A	mA
Reverse Voltage	V_R	Not designed for reverse operation	V
Junction Temperature	T_J	150	$^\circ C$
Operating Temperature	T_{opr}	-40 ~ +125	$^\circ C$
Storage Temperature	T_{stg}	-40 ~ +125	$^\circ C$
ESD Sensitivity ($R=1.5k\Omega$, $C=100pF$)	ESD_{HBM}	8	kV
Soldering Temperature	Reflow	260 $^\circ C$ for 30sec	$^\circ C$

3. Mechanical Dimension

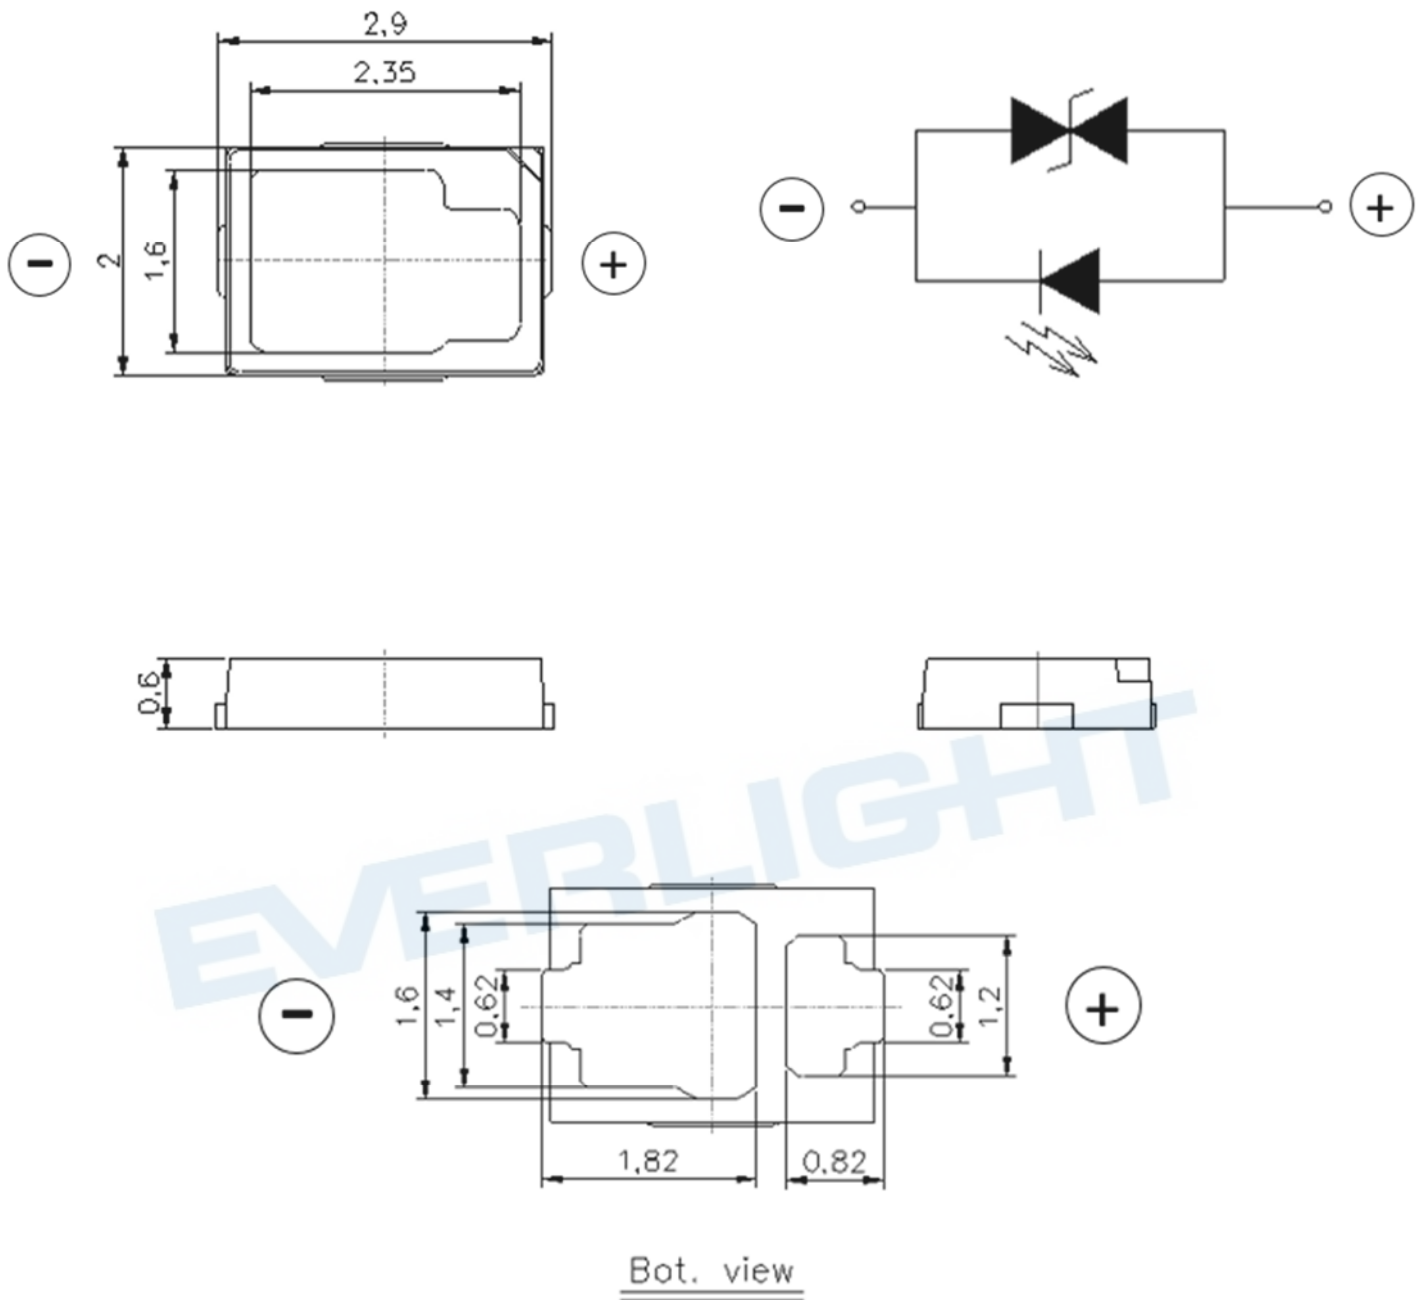

Notes:

1. Dimensions are in millimeters.
2. Tolerances unless mentioned are $\pm 0.1\text{mm}$.

5. Binning Information

Luminous Flux Bins

Group	Bin	Minimum Photometric Flux (lm)	Maximum Photometric Flux (lm)
E	1	4	5
	2	5	6
	3	6	8
	4	8	10
	5	10	13
	6	13	17
	7	17	20
	8	20	23
	9	23	27
F	1	27	33
	2	33	39
	3	39	45
	4	45	52
	5	52	60
	6	60	70
	7	70	80
	8	80	90
	9	90	100

Group	Bin	Minimum Photometric Flux (lm)	Maximum Photometric Flux (lm)
J	1	100	110
	2	110	120
	3	120	130
	4	130	140
	5	140	150
	6	150	160
	7	160	180
	8	180	200
	9	200	225
K	1	225	250
	2	250	275
	3	275	300
	4	300	325
	5	325	350
	6	350	375
	7	375	400
	8	400	425
	9	425	450

Notes:

1. Luminous flux measurement tolerance: $\pm 8\%$
2. Test current: Typical forward current
3. Current pulse time: 25ms

Forward Voltage Bins



Bin code	Min Forward Voltage [V]	Max Forward Voltage [V]
2730	2.75	3.00
3032	3.00	3.25
3235	3.25	3.50
3537	3.50	3.75

Notes:

1. Forward voltage measurement tolerance: $\pm 0.05V$
2. Test current: Typical forward current
3. Current pulse time: 25ms

EVERLIGHT

Color Bin Structure ECE Bin Structure

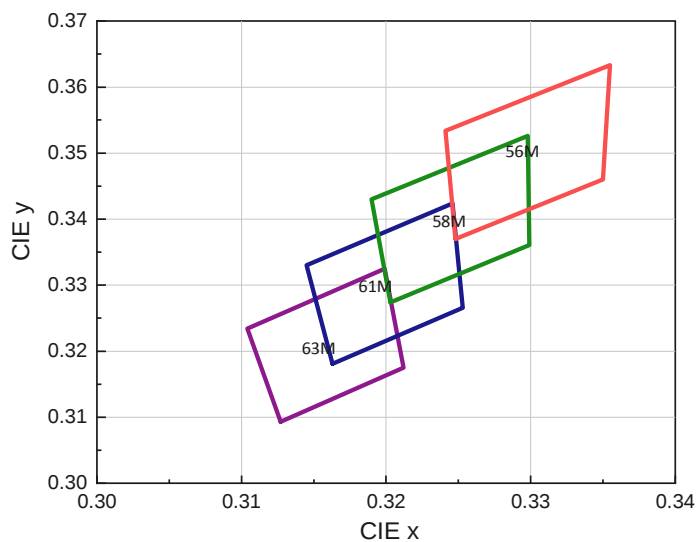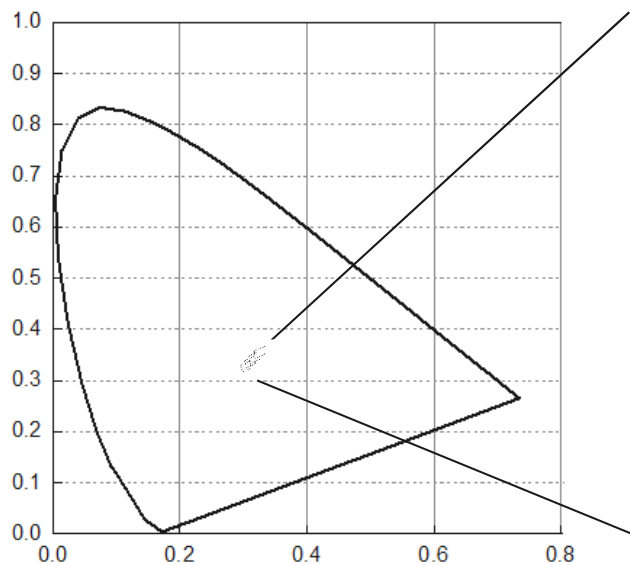

Cool White Bin Coordinates

Bin	CIE x	CIE y
63M	0.3127	0.3093
	0.3212	0.3175
	0.3199	0.3325
	0.3104	0.3234

Bin	CIE x	CIE y
61M	0.3163	0.3181
	0.3253	0.3266
	0.3246	0.3424
	0.3145	0.3330


Bin	CIE x	CIE y
58M	0.3203	0.3274
	0.3299	0.3361
	0.3298	0.3526
	0.3190	0.3430

Bin	CIE x	CIE y
56M	0.3248	0.3370
	0.3350	0.3460
	0.3355	0.3633
	0.3241	0.3534

6. Characteristics Graph


Wavelength Characteristics Relative Spectral Distribution @ Ts = 25°C, IF=200mA

$$\Phi_V / \Phi_V (Max.) = f(\lambda)$$

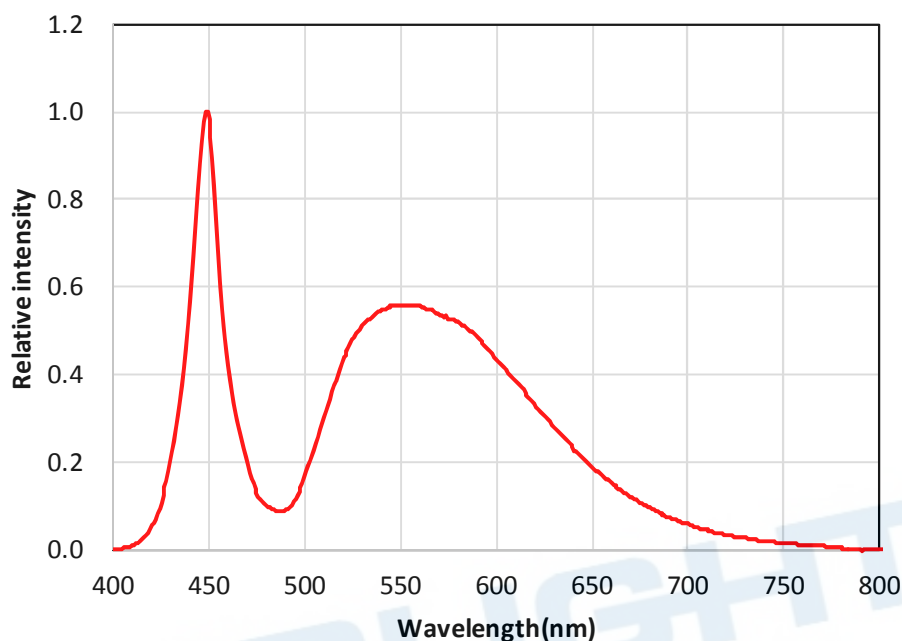

Typical Diagram Characteristics of Radiation

$$\Phi_V / \Phi_V (0^\circ) = f(\varphi)$$

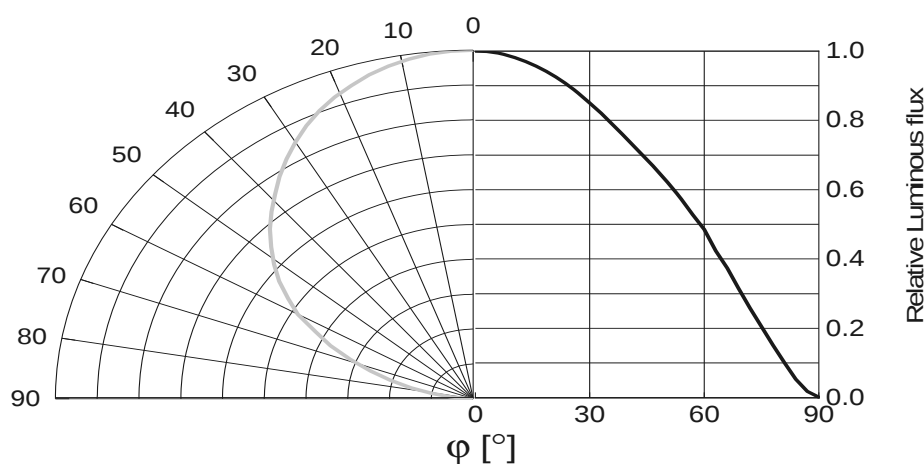


Notes:

1. φ is the off axis angle from lamp centerline where the luminous intensity is 1/2 of the peak value.
2. View angle tolerance is $\pm 5^\circ$.

Forward Voltage vs. Forward Current

@ Ts = 25°C


$$I_F = f(V_F)$$

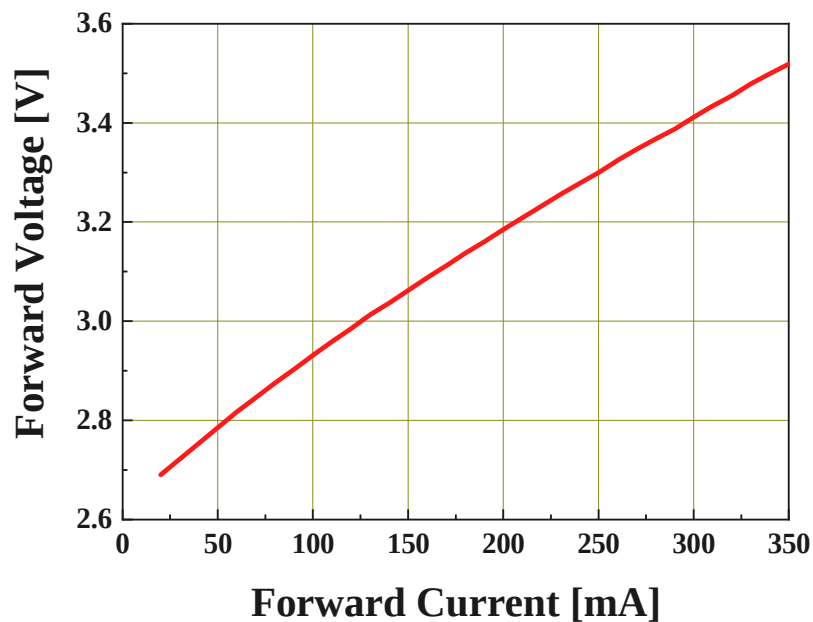

Relative Luminous Flux vs. Forward Current

@ Ts = 25°C


$$\Phi_V / \Phi_V(200mA) = f(I_F)$$

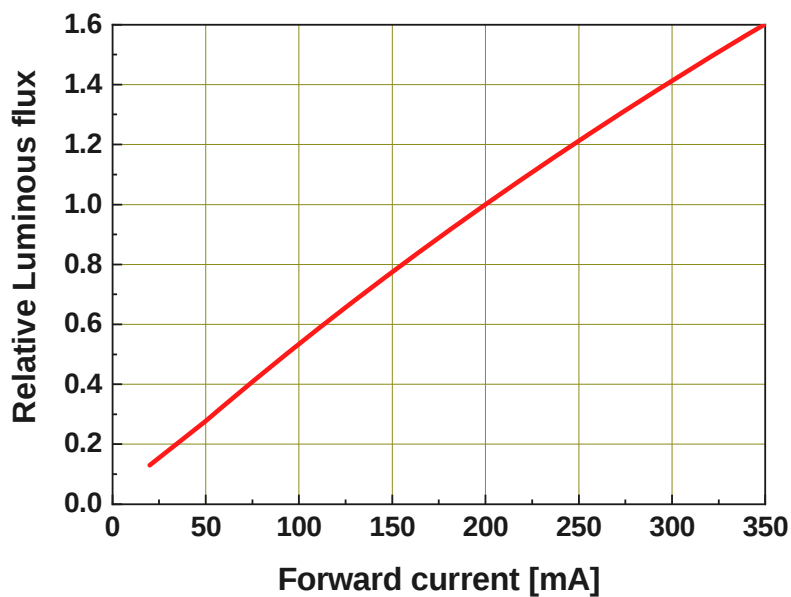

Chromaticity Coordinates Shift vs. Forward Current

@ $T_s = 25^\circ\text{C}$


$$\Delta CIE\ x, \Delta CIE\ y = f(I_F)$$

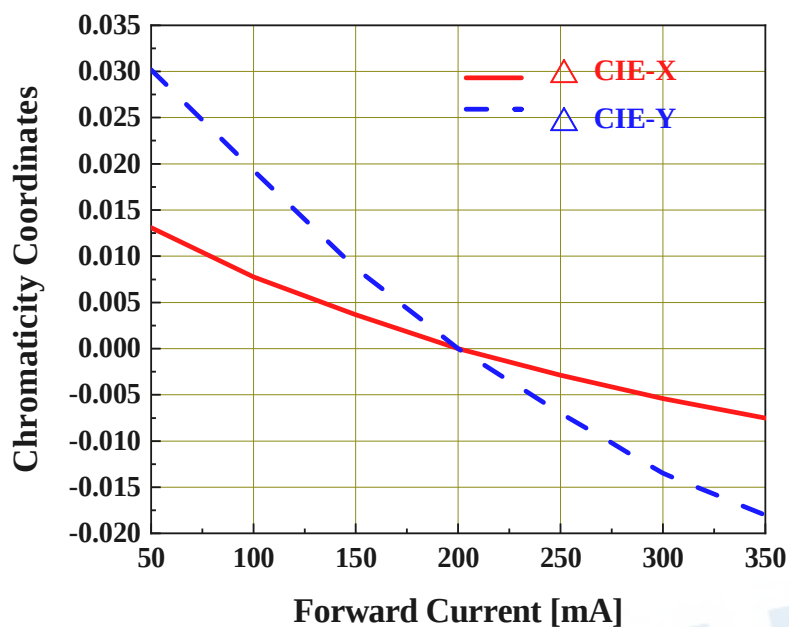

Relative Forward Voltage vs. Junction Temperature

@ $I_F = 200\text{mA}$


$$\Delta V_F = V_F - V_F(25^\circ\text{C}) = f(T_j)$$

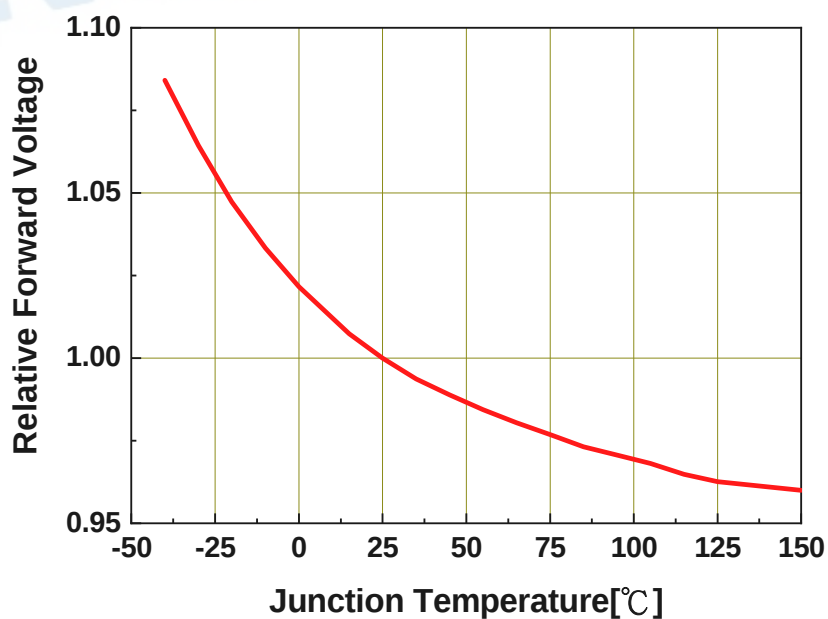

Relative Luminous flux vs. Junction Temperature

@ $I_F=200\text{mA}$


$$\Phi_V / \Phi_V(25^\circ\text{C}) = f(T_j)$$

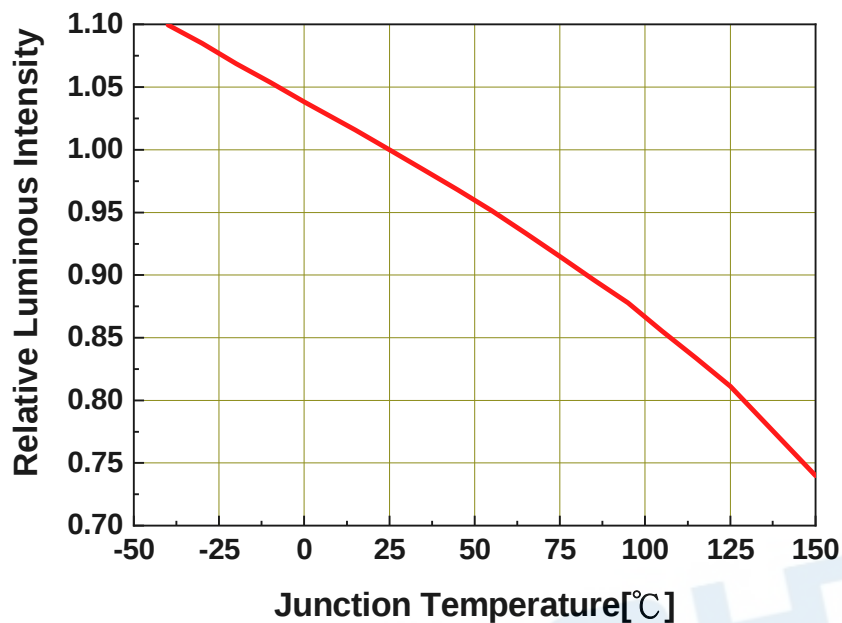

Relative Wavelength vs. Junction Temperature


@ $I_F=200\text{mA}$

$$\Delta\lambda_d = \lambda_d - \lambda_d(25^\circ\text{C}) = f(T_j)$$

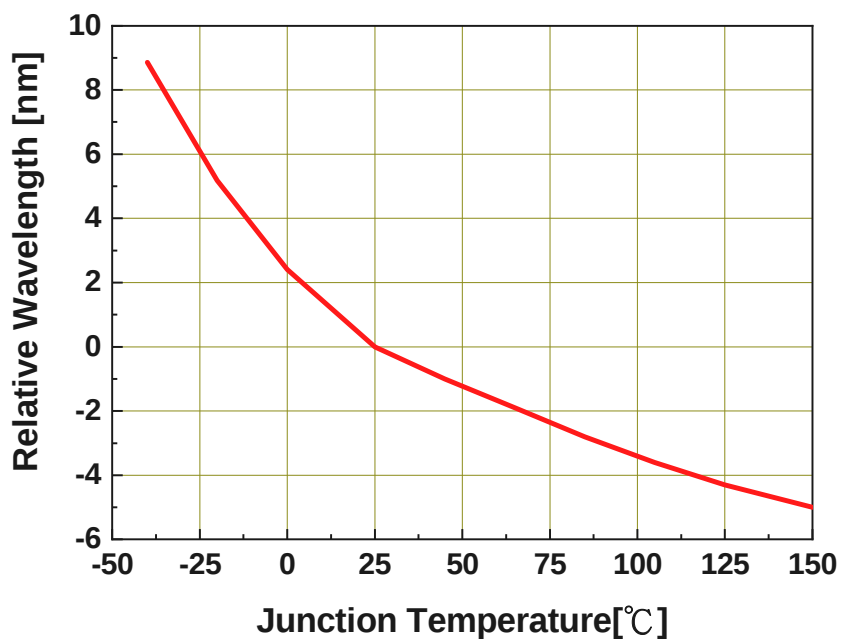

Forward Current Derating Curve

$$I_F = f(T_S)$$

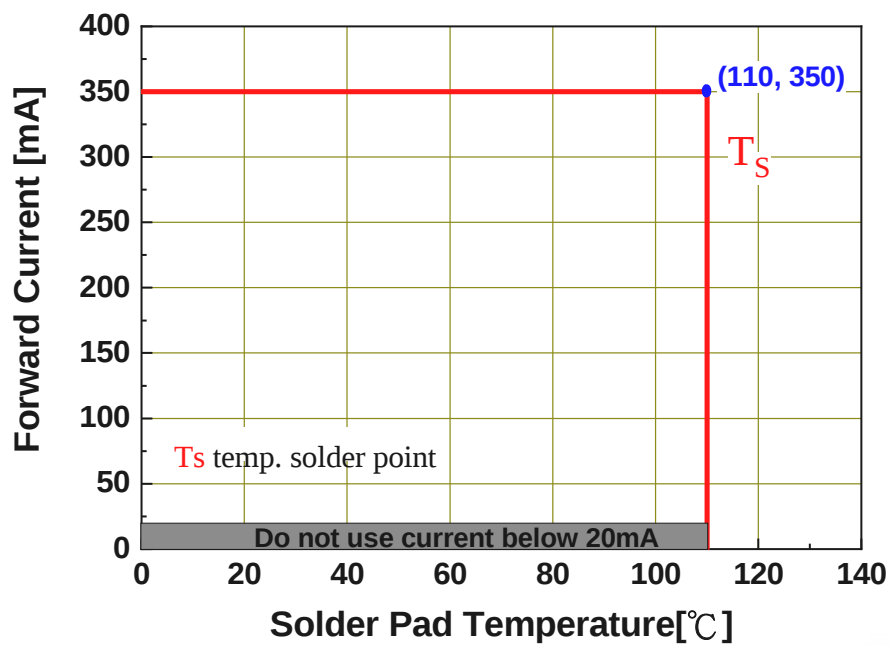

7. Part Number

2820-C02001H-AM

Part number is designated with below details.

- 2820 = Product family name.
- C = Color [1]
- 0 = CRI (0=N/A ; >70%=7 ; >80%=8 ; >90%=9)
- 200 = Test current [mA]
- 1 = Lead Frame Type (0=Ag ; 1=Au)
- H = Brightness Level (H=High ; M=Medium ; L=Low)
- AM = Automotive application

- Note

[1] Color :

Symbol	Description
C	Cool White
N	Neutral White
W	Warm White
PA	Phosphor Converted Amber
PR	Phosphor Converted Red
UB	Blue
IB	Ice Blue
SB	Sky Blue
UP	Purple
UG	Green
UY	Yellow
UYG	Brilliant Yellow Green
UPG	Pale Green
UA	Amber
UR	Red
SR	Super Red
RGB	RGB-Color
PYG	Phosphor Converted Yellow Green

8. Ordering Information

2820-C02001H-ABCDEFGHIJKL-MN-AM

Part Number	Order Code
2820-C02001H-AM	2820-C02001H-56M63MF6F92737-2T-AM


Order code contains information with below details :

1. ABCD = min/max wavelength or CCT
2. EFGH = min./max. luminous flux in [lm] or luminous intensity in [mcd]
3. IJKL = min./max. forward voltage
4. MN = Packing code
5. AM = Automotive Application

EVERLIGHT

9. Reflow Soldering Profile

Soldering Condition (Reference: IPC/JEDEC J-STD-020D)

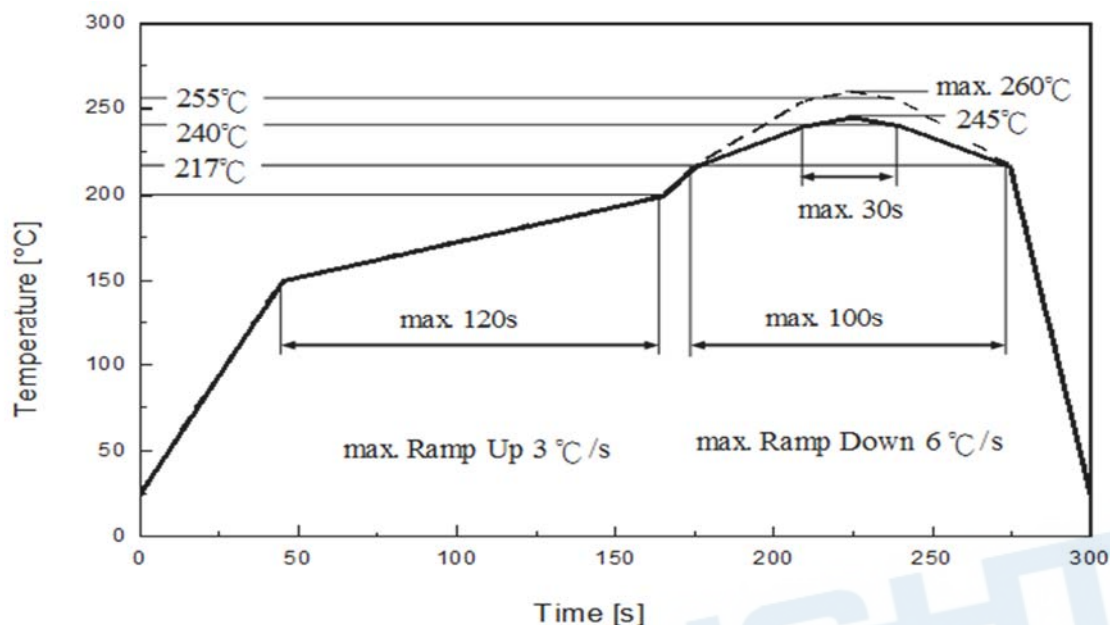

Profile Feature	Pb-Free Assembly	Unit
	Recommendation	
Ramp-up rate to preheat 25 °C to 150 °C	3	°C /sec
Time of soaking zone 150 °C to 200 °C	120	sec
Ramp-up rate to peak	3	°C /sec
Liquidus temperature	217	°C
Time above liquidus temperature	100	sec
Peak temperature (max.)	260	°C
Time within 5°C of the specified peak temperature	30	sec
Ramp-down Rate (max.)	6	°C /sec


10. Packaging Information

● Product Labeling



1. CPN : Customer's Product Number
2. P/N : Everlight Part Number
3. QTY : Packing Quantity
4. CAT : Luminous Flux (Brightness) Bin
5. HUE : Color Bin
6. REF : Forward Voltage Bin
7. LOT No : Lot Number


● Packing: Loaded Quantity 2000 pcs Per Reel

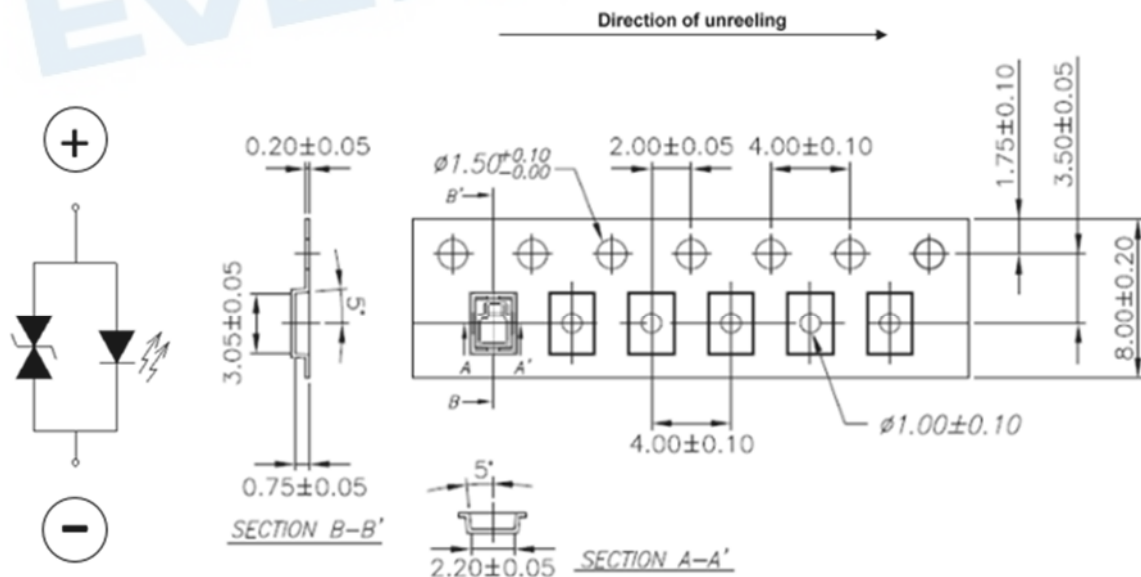

Notes:

Dimensions are in millimeters.


● Reel Dimensions

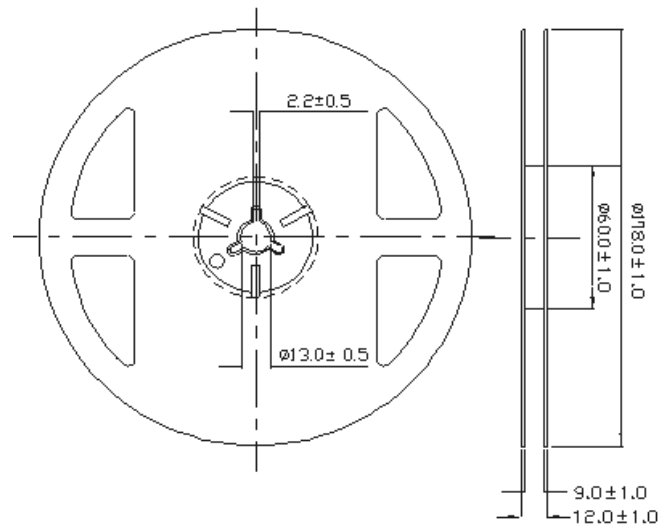

Notes:

1. Dimensions are in millimeters.

● Moisture Resistant Packing Process

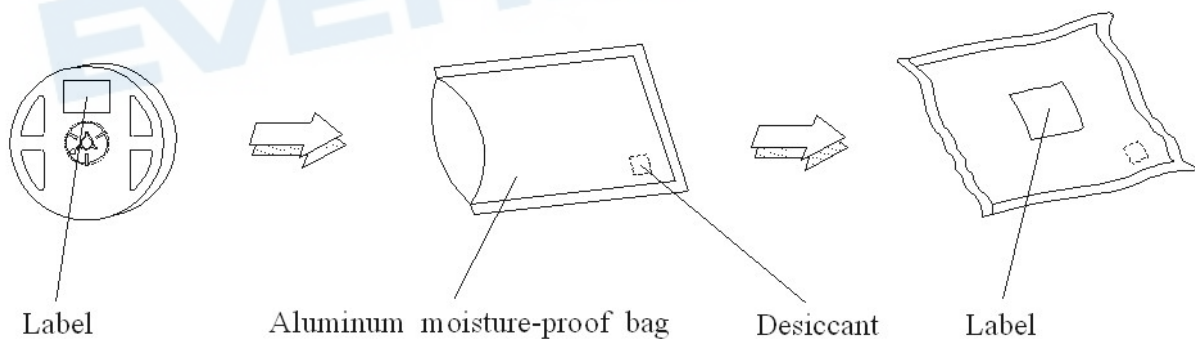

11. Precaution for Use

1. Over-current-proof

Customer must apply resistors for protection; otherwise slight voltage shift will cause big current change (burn out will happen).

2. Assemblies

Do not stack assemblies containing LEDs to prevent damage to the optical surface of LEDs. Forces applied to the optical surface may result in the surface being damaged.

3. Soldering Condition

3.1 When soldering, do not put stress on the LEDs during heating.


3.2 After soldering, do not warp the circuit board.

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5. Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

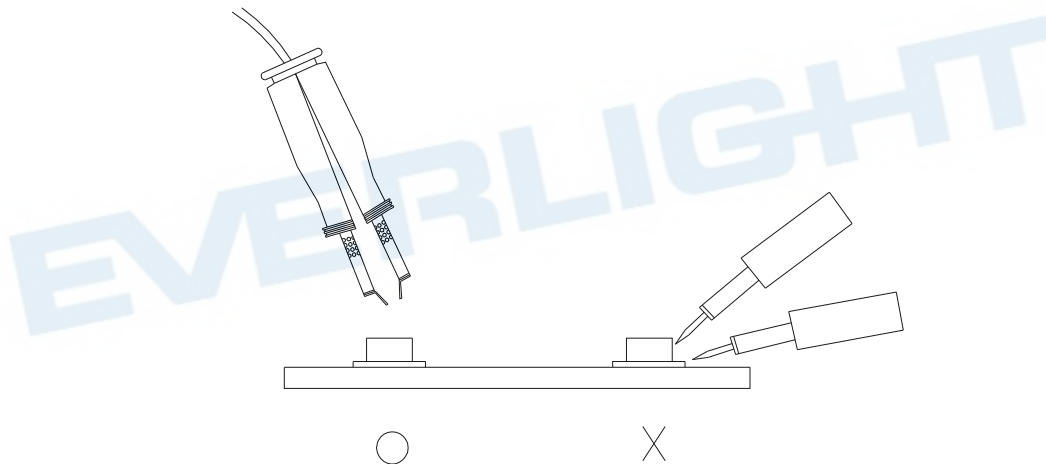

Revision History

Current version: 24.May.2022

Issue No. DHE-0004053

Version: 1.0

Created by: Yukun Chen

Rev.	Subjects (major change in previous version)	Modified date
1.0	Preliminary Data Sheet	2022/05/24

EVERLIGHT