



TO-220-3L Plastic-Encapsulate Diode

MUR20H40CTB

HYPERFAST RECTIFIER, FRED

MAIN CHARACTERISTICS

I_o	20(10×2)A
V_{RRM}	400V
T_{rr}	23ns
T_j	175℃
$V_{F(typ)}$	0.9V(@ $T_j=150^{\circ}C$)

FEATURES

- Ultrafast Recovery Times and Low Recovery Loss
- Low Forward Voltage
- Low Reverse Leakage Current

APPLICATIONS

Specifically designed to improve efficiency of PFC and output rectification stages of EV / HEV battery charging stations, booster stage of solar inverters and UPS applications, these devices are perfectly matched to operate with MOSFETs or high speed IGBTs.

MARKING




MUR20H40CTB = Device code

Solid dot = Green molding compound device

if none, the normal device

XXXX = Code

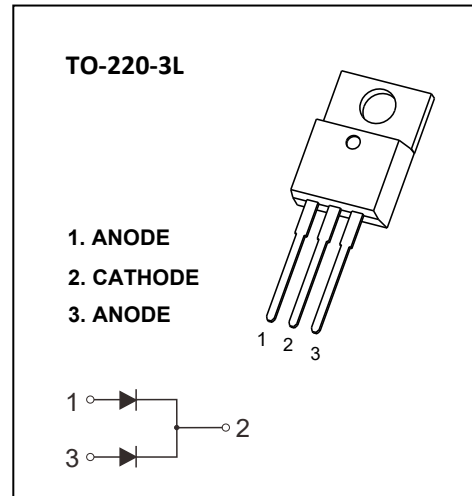

MAXIMUM RATINGS ($T_c=25^{\circ}C$ unless otherwise noted)

Symbol	Parameter	MUR20H40CTB	Unit
V_{RRM}	Peak Repetitive Reverse Voltage	400	V
V_R	DC Blocking Voltage		
$I_{F(AV)}$	Average rectified output current@ Per leg($T_c=143^{\circ}C$)	10	A
	Average rectified output current@ Total device($T_c=143^{\circ}C$)	20	
$I_{F(RMS)}$	RMS Forward Current($T_c=143^{\circ}C$)	14	A
I_{FSM}	Non-Repetitive Surge Forward Current (8.3ms)	184	A
P_D	Power dissipation	132	W
$R_{\theta JC}$	Thermal Resistance From Junction to Case	1.14	℃/W
T_j	Operating Junction Temperature Range	-55 ~ +175	℃
T_{stg}	Storage Temperature Range	-55 ~ +175	℃

Typical Characteristics







ELECTRICAL CHARACTERISTICS ($T_c=25^{\circ}\text{C}$ unless otherwise specified)

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
$V_{(BR)}$	Reverse Voltage	$I_R=100\mu\text{A}$		400			V
I_R	Reverse Current	$V_R=400\text{V}$	$T_j=25^{\circ}\text{C}$			10	μA
			$T_j=150^{\circ}\text{C}$			500	μA
V_F	Forward Voltage	$I_F=10\text{A}$	$T_j=25^{\circ}\text{C}$		1.1	1.4	V
			$T_j=150^{\circ}\text{C}$		0.9		V
C_{tot}	Total Capacitance	$V_R=200\text{V}, f=1\text{MHz}$			13.5		pF
t_{rr}	Reverse Recovery time	$I_F=0.5\text{A}, I_R=1\text{A}, I_{rr}=0.25\text{A}$			28		ns
		$I_F=1\text{A}, V_R=30\text{V}, di_F/dt=200\text{A}/\mu\text{s}$			23		ns


ELECTRICAL CHARACTERISTICS ($T_c=25^{\circ}\text{C}$ unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
t_{rr}	Reverse Recovery Time	$I_F=10\text{A}, V_R=200\text{V}, di_F/dt=200\text{A}/\mu\text{s}$		55		ns
I_{RRM}	Max. Reverse Recovery Current			4.8		A
Q_{rr}	Reverse Recovery Charge			158		nC
t_{rr}	Reverse Recovery Time	$I_F=10\text{A}, V_R=200\text{V}, di_F/dt=200\text{A}/\mu\text{s}, T_j=125^{\circ}\text{C}$		79		ns
I_{RRM}	Max. Reverse Recovery Current			7.9		A
Q_{rr}	Reverse Recovery Charge			360		nC
t_{rr}	Reverse Recovery Time	$I_F=10\text{A}, V_R=200\text{V}, di_F/dt=600\text{A}/\mu\text{s}, T_j=125^{\circ}\text{C}$		46		ns
I_{RRM}	Max. Reverse Recovery Current			18		A
Q_{rr}	Reverse Recovery Charge			461		nC


Typical Characteristics

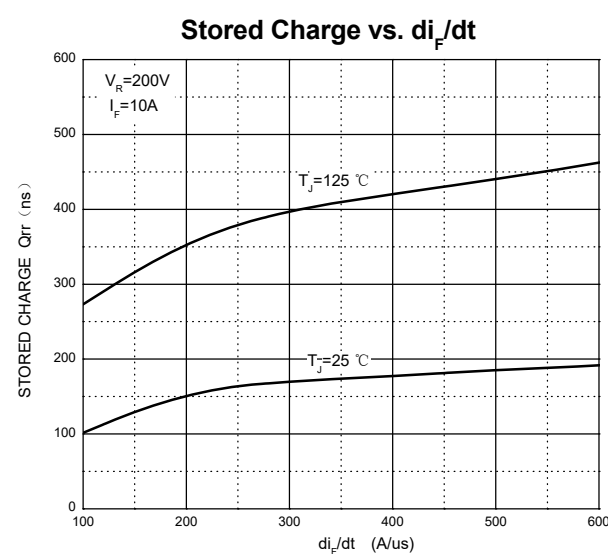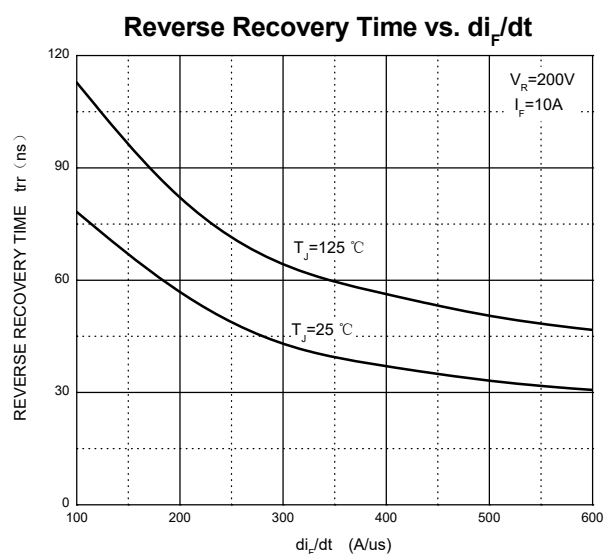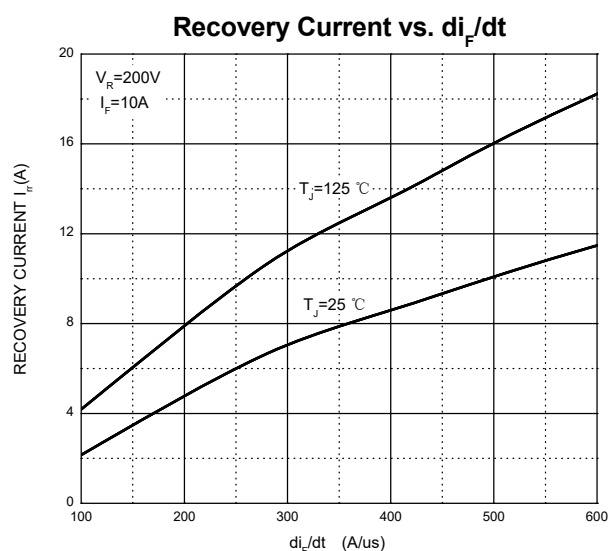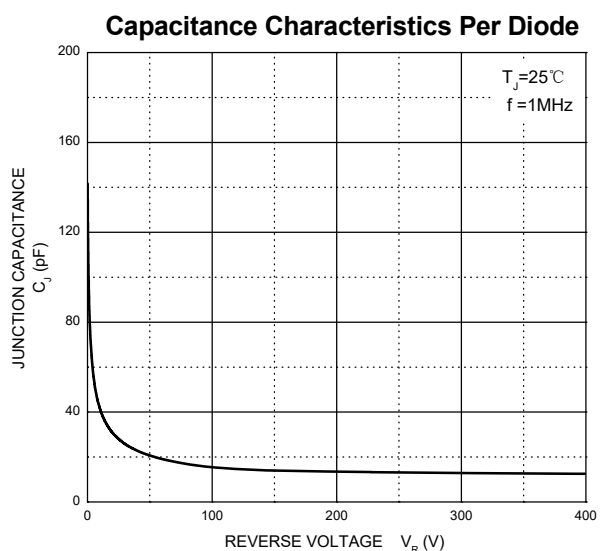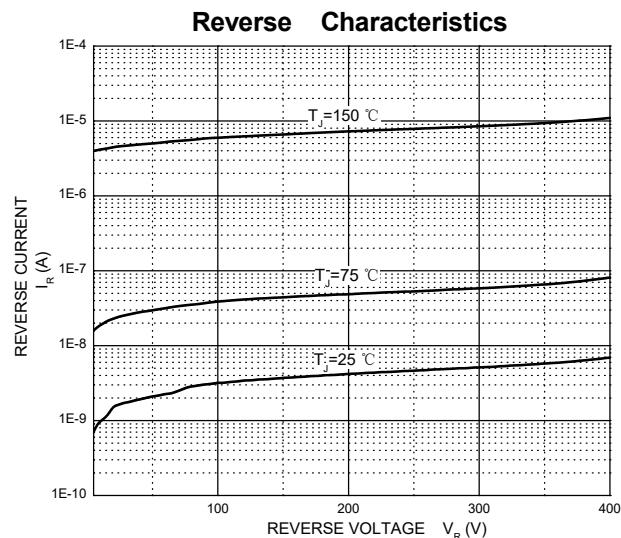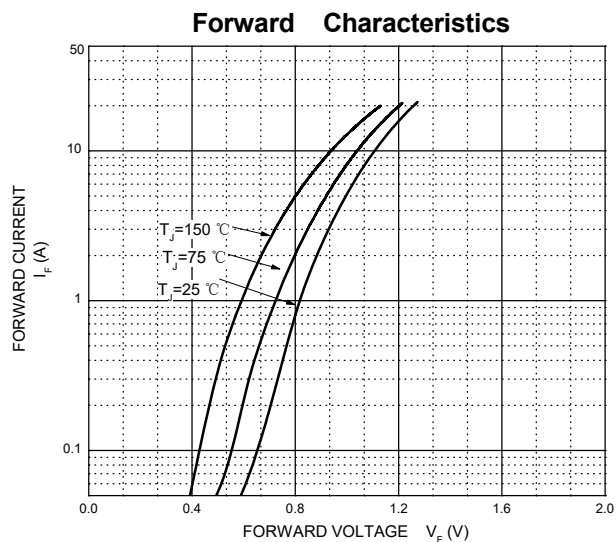


Typical Characteristics

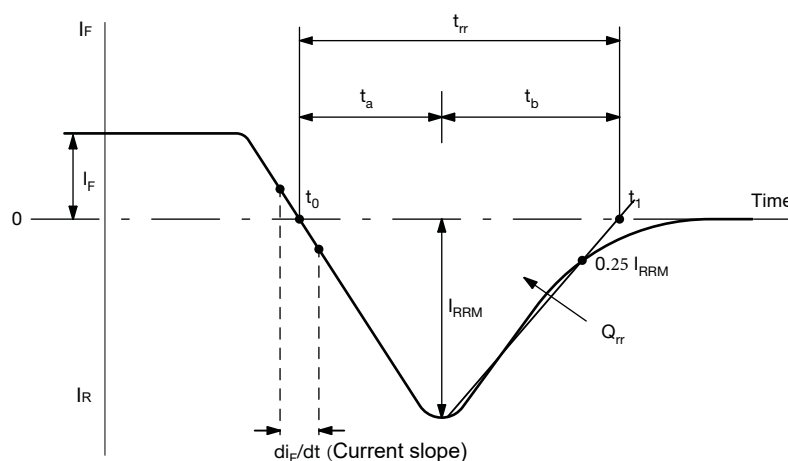

Reverse Recovery Waveform and Definitions

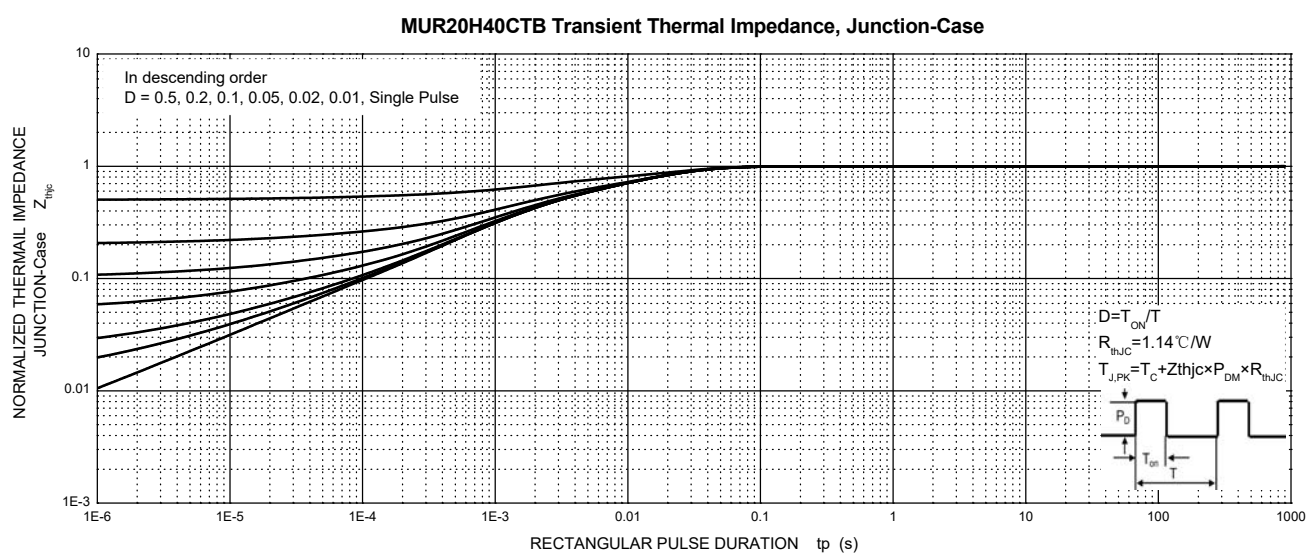

TO-220-3L Package Outline Dimensions

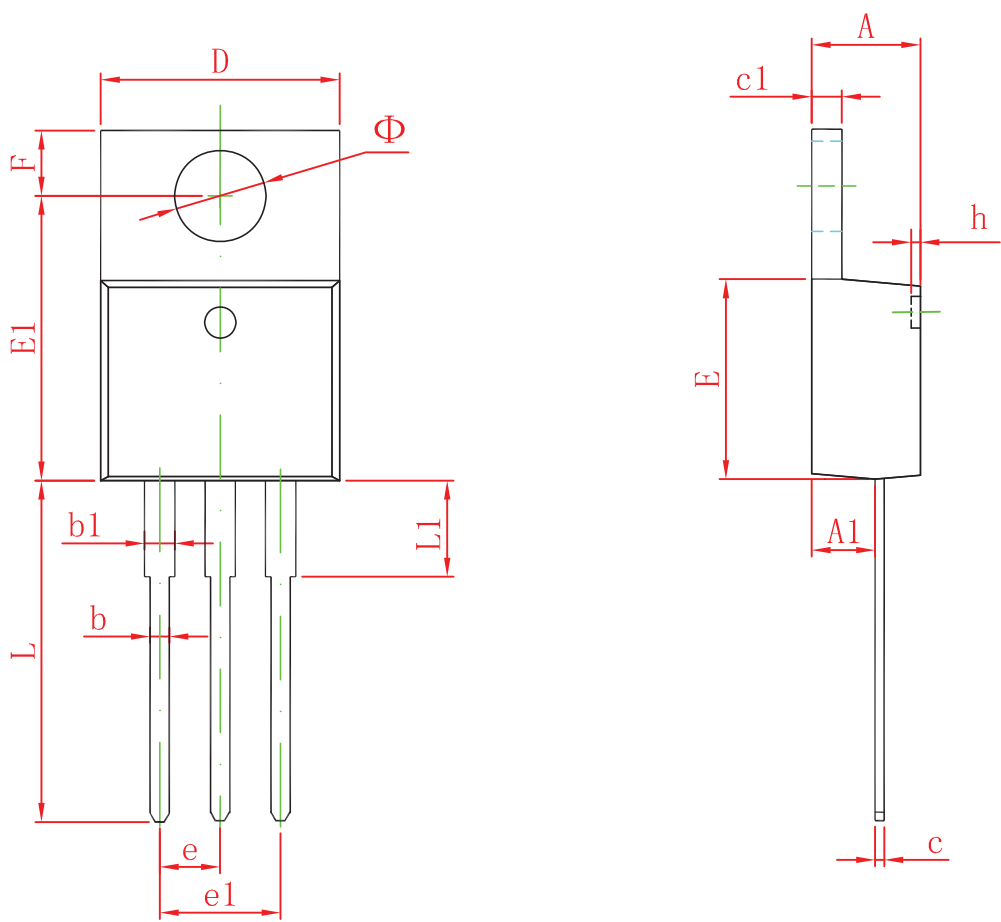

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	4.450	4.750	0.175	0.187
A1	2.520	2.820	0.099	0.111
b	0.710	0.910	0.028	0.036
b1	1.170	1.370	0.046	0.054
c	0.300	0.500	0.012	0.020
c1	1.170	1.370	0.046	0.054
D	9.830	10.330	0.387	0.407
E	8.500	8.900	0.335	0.350
E1	12.050	12.650	0.474	0.498
e	2.540 TYP		0.100 TYP	
e1	4.900	5.200	0.192	0.205
F	2.540	2.940	0.100	0.116
h	0.100 TYP		0.004 TYP	
L	13.300	13.800	0.523	0.543
L1	3.540	3.940	0.139	0.155
Φ	3.735	3.935	0.147	0.155