

250mA Low Consumption Linear Regulator

DESCRIPTION


BL8060 series is a group of positive voltage output, low power consumption, low dropout voltage, three terminal regulator. It can provide 250mA output current when input / output voltage differential drops to 570mV ($V_{OUT}=2.8V$), and it also provides foldback short-circuit protection and output current limit function. The very low power consumption of BL8060 ($I_Q=1.0\mu A$) can greatly improve natural life of batteries.

BL8060 can provide output value in the range of 1.1V~5.5V in 0.1V steps. It also can customized on command.

BL8060 includes high accuracy voltage reference, error amplifier, current limit circuit and output driver module.

BL8060 has well load transient response and good temperature characteristic, And it uses trimming technique to guarantee output voltage accuracy within $\pm 2\%$.

TYPICAL APPLICATION

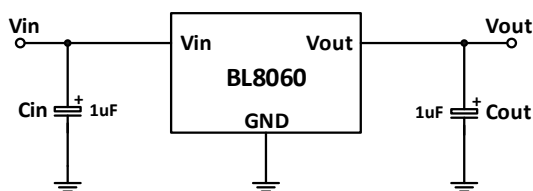

Note:

- 1) Input capacitor ($C_{IN}=1\mu F$) is recommended in all application circuit. Ceramic capacitor is recommended.
- 2) Output capacitor ($C_{OUT}=1\mu F$) is recommended in all application to assure the stability of circuit. Ceramic capacitor is recommended.


FEATURES

- Low power consumption: $1.0\mu A$ (Typ.)
- Maximum output current: 250mA
- Small dropout voltage
 - 210mV@100mA ($V_{OUT}=2.8V$)
 - 570mV@250mA ($V_{OUT}=2.8V$)
- Input voltage range: 1.5V~12V
- Output voltage range: 1.1V~5.5V (customized on command in 0.1V steps)
- Highly accurate: $\pm 2\%$ ($\pm 1\%$ customized)
- Output current limit
 - 420mA@ $V_{OUT}=2.8V$
- Foldback short-circuit current
 - 90mA@ $V_{OUT}=2.8V$

APPLICATIONS

- Battery powered equipment
- Power management of MP3、PDA、DSC、mouse、PS2 games
- Reference voltage source regulation after switching power

ELECTRICAL CHARACTERISTICS

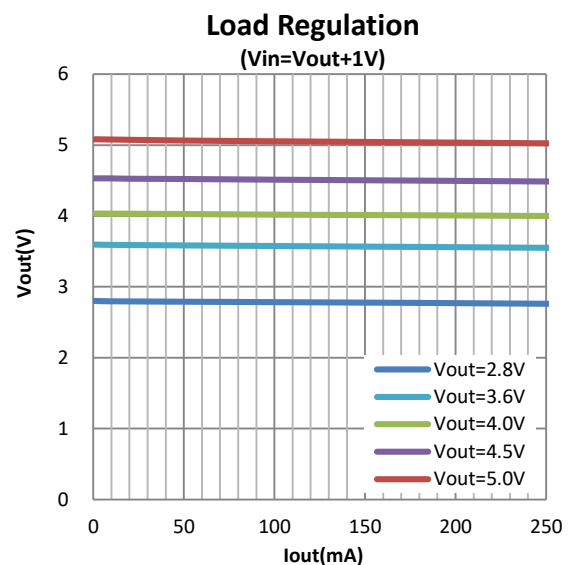

ORDERING INFORMATION

BL8060 00000

Code	Description
1	Temperature&Rohs: C: -40~85°C , Pb Free Rohs Std. H: -40~85°C, Halogen Free
2	Package type: B3:SOT-23-3 B5:SOT-23-5 C3:SOT-89-3 C3B:SOT-89-3(B) HA:TO-92 HB:TO-92
3	Packing type: TR:Tape&Reel (Standard) BG:Bag (TO-92) PT:Reel (TO-92)
4	Output voltage: e.g. 11=1.1V 15=1.5V 55=5.5V
5	Voltage accuracy: 1=±1% Blank(default)=±2%

MARKING DESCRIPTON

N: Product code

X: Output voltage

Output Voltage Code

VOUT	Code	VOUT	Code	VOUT	Code
1.2V	2	3.0V	0	4.4V	4
1.3V	3	3.1V	1	4.5V	5
1.5V	5	3.2V	2	4.6V	6
1.8V	8	3.3V	3	4.7V	7
2.0V	0	3.4V	4	4.8V	8
2.1V	1	3.5V	5	4.9V	9
2.2V	2	3.6V	6	5.0V	0
2.3V	3	3.7V	7	5.1V	1
2.4V	4	3.8V	8	5.2V	2
2.5V	5	3.9V	9	5.3V	3
2.6V	6	4.0V	0	5.4V	4
2.7V	7	4.1V	1	5.5V	5
2.8V	8	4.2V	2		
2.9V	9	4.3V	3		

Y: The Year of manufacturing, "1" stands for year 20X1, "2" stands for year 20X2, and "8" stands for year 20X8. (X=0,1,2,...9)

W: The week of manufacturing. "A" stands for week 1, "Z" stands for week 26, "A" stands for week 27, "Z" stands for week 52.

The date code of the 53rd week is the same as that of the first week of the next year. For example, the date code of the 53rd week of 2017 is the same as that of the first week of 2018, which are 1801 and 8A.

PIN CONFIGURATION

Product classification		BL8060CB3TR□□□
Marking		
NXYWI	N:Product code	
	X:Output voltage	
	YW: Date code	
Product classification		BL8060CB5TR□□□
Marking		
NXYWI	N:Product code	
	X: Output voltage	
	YW: Date code	
Product classification		BL8060CC3TR□□□
Marking		
NXXI LLBYW	N:Product code	
	XX:Output voltage	
	LL:LOT NO.	
	B:FAB code	
	YW:Date code	
Product classification		BL8060CC3BTR□□□
Marking		
NXXIB LLBYW	N:Product code	
	XX:Output voltage	
	LL:LOT NO.	
	B:FAB code	
	YW:Date code	

Product classification		BL8060CHABG□□□ BL8060CHAPT□□□
Marking		
NXXIA LLBYW	N:Product code	
	XX:Output voltage	
	LL:LOT NO.	
	B:FAB code	
		YW:Date code
Product classification		BL8060CHBBG□□□ BL8060CHBPT□□□
Marking		
NXXIB LLBYW	N:Product code	
	XX:Output voltage	
	LL:LOT NO.	
	B:FAB code	
	YW:Date code	
GND	Ground pin	
Vin	Supply voltage input	
Vout	Output voltage	

ABSOLUTE MAXIMUM RATING

Parameter		Value
Max input voltage		14V
Operating junction temperature(T _J)		125°C
Ambient temperature(T _A)		-40°C -85°C
Power dissipation	SOT-23-3	250mW
	SOT-23-5	250mW
	SOT-89-3	500mW
	TO-92	500mW
Storage temperature(T _S)		-40°C -150°C
Lead temperature & time		260°C,10S

Note:

Exceed these limits to damage to the device.

Exposure to absolute maximum rating conditions may affect device reliability.

RECOMMENDED WORK CONDITIONS

Item	Min	Recommended	Max.	Unit
Input voltage range			12	V
Ambient temperature	-40		85	°C

ELECTRICAL CHARACTERISTICS

BL8060□□□TR□□

(Test Conditions: C_{IN}=1uF, C_{OUT}=1uF, T_A=25°C, Unless Otherwise Specified)

Symbol	Parameter	Conditions	Min	Type	Max	Units
V _{IN}	Input voltage				12	V
V _{OUT}	Output voltage		V _{OUT} x0.98		V _{OUT} X1.02	V
I _{OUT (MAX.)}	Maximum output current	V _{IN} -V _{OUT} =1V	250			mA
Dropout voltage	Input-output voltage differential	I _{OUT} =100mA	V _{OUT} ≤ 1.8V	600	1000	mV
			V _{OUT} ≥ 1.8V	300	600	
$\frac{\Delta V_{out}}{\Delta V_{in} \cdot V_{out}}$	Line regulation	I _{OUT} =10mA, 1.5V ≤ V _{IN} ≤ 8V		0.2	0.3	%/V
ΔV _{OUT}	Load regulation	V _{IN} =Set V _{OUT} +1V 1mA ≤ I _{OUT} ≤ 100mA		20	40	mV
I _Q	Quiescent current	V _{IN} =Set V _{OUT} +1V		1.0	5.0	uA
$\frac{\Delta V_{out}}{\Delta T \cdot V_{out}}$	Output voltage temperature coefficient	I _{OUT} =10mA		100		ppm/°C


BL8060□□□TR36

(Test Conditions: C_{IN}=1uF, C_{OUT}=1uF, T_A=25°C, Unless Otherwise Specified)

Symbol	Parameter	Conditions	Min	Type	Max	Units
V _{IN}	Input voltage				12	V
V _{OUT}	Output voltage		3.528	3.6	3.672	V
I _{OUT (MAX.)}	Maximum output current	V _{IN} -V _{OUT} =1V	250			mA
Dropout voltage	Input-output voltage differential	I _{OUT} =100mA		210	600	mV

$\frac{\Delta V_{out}}{\Delta V_{in} \cdot V_{out}}$	Line regulation	$I_{OUT}=10mA, 4V \leq V_{IN} \leq 8V$	0.2	0.3	%/V
ΔV_{out}	Load regulation	$V_{IN} = \text{Set } V_{OUT} + 1V$ $1mA \leq I_{OUT} \leq 100mA$	20	40	mV
I_q	Quiescent current	$V_{IN} = \text{Set } V_{OUT} + 1V$	1.0	5.0	μA
$\frac{\Delta V_{out}}{\Delta T \cdot V_{out}}$	Output voltage temperature coefficient	$I_{OUT}=10mA$	100		ppm/ $^{\circ}C$

BLOCK DIAGRAM

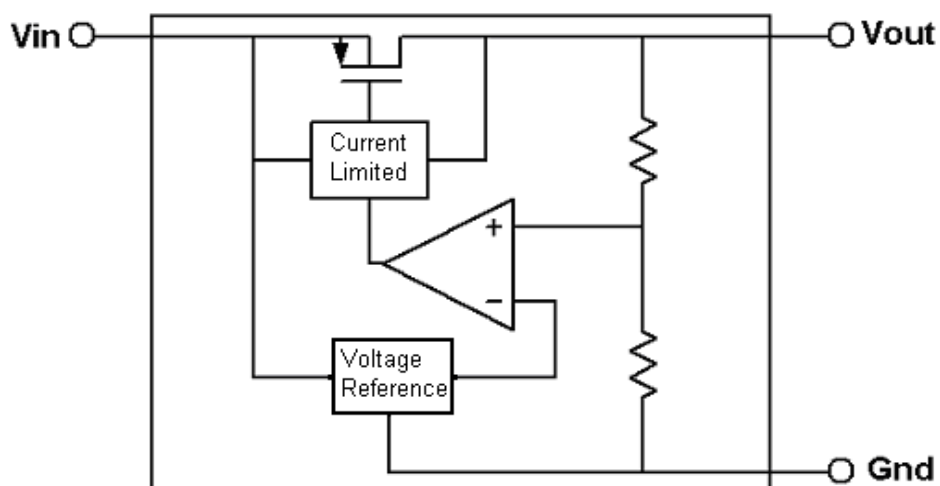







EXPLANATION

BL8060 is a series of low dropout voltage and low power consumption three pins regulator. Its application circuit is very simple, which only needs two outside capacitors. It is composed of these modules: high accuracy voltage reference, current limit circuit, error amplifier, output driver and power transistor.


Current Limit module can keep chip and power system away from danger when load current is more than 250mA.

BL8060 uses trimming technique to assure the accuracy of output value within $\pm 2\%$, at the same time, temperature compensation is elaborately considered in this chip, which makes BL8060's temperature coefficient within 100ppm/ $^{\circ}C$.


TYPICAL PERFORMANCE CHARACTERISTICS

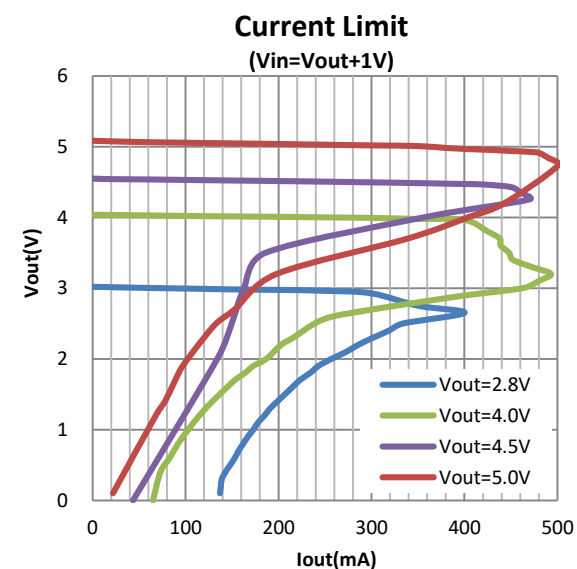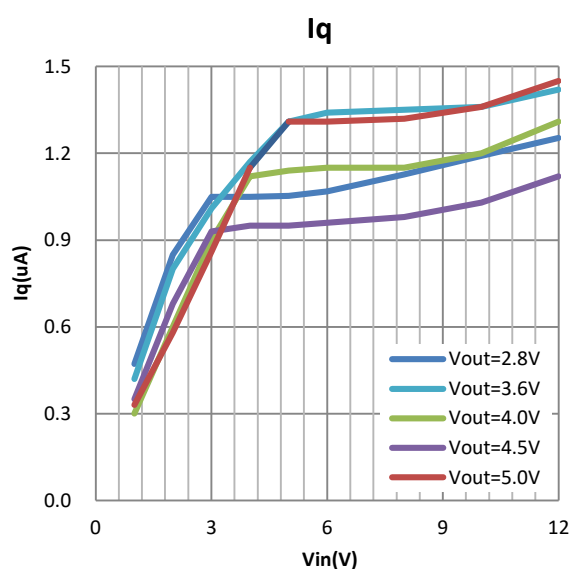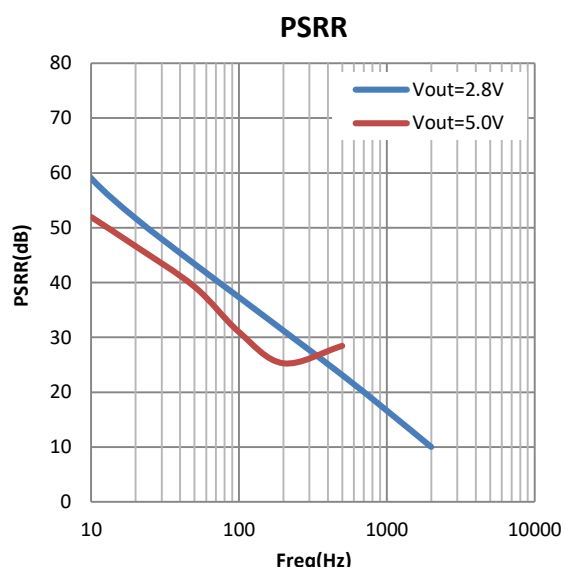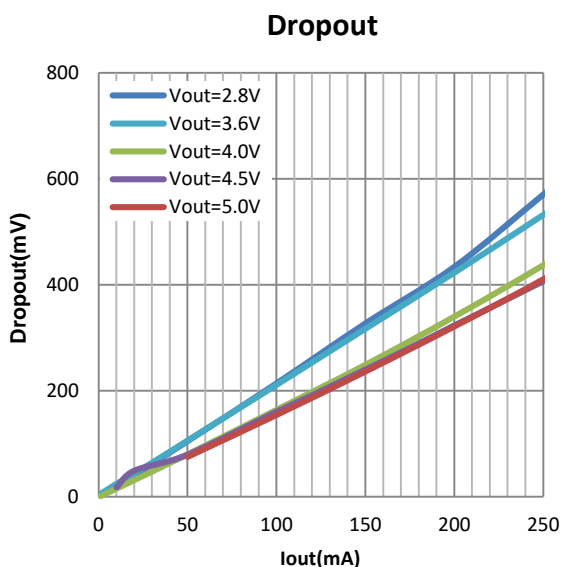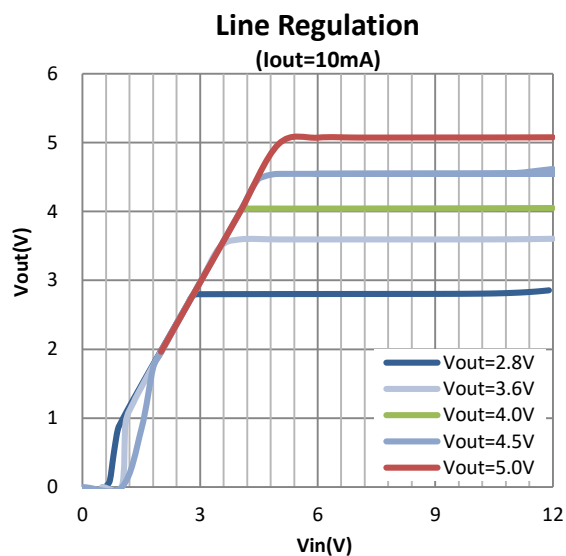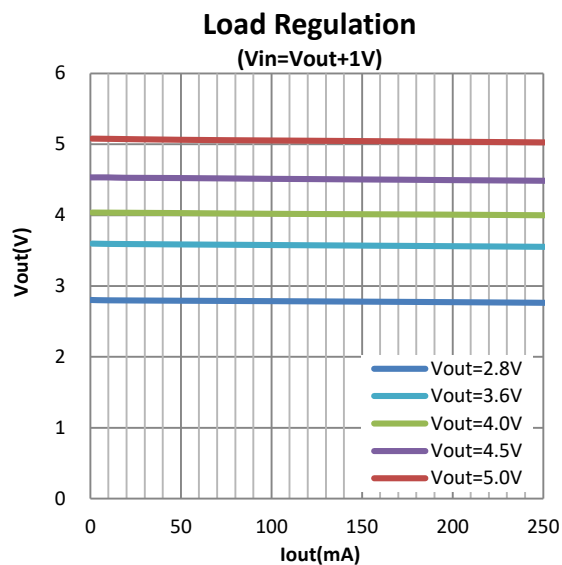


Line transient response

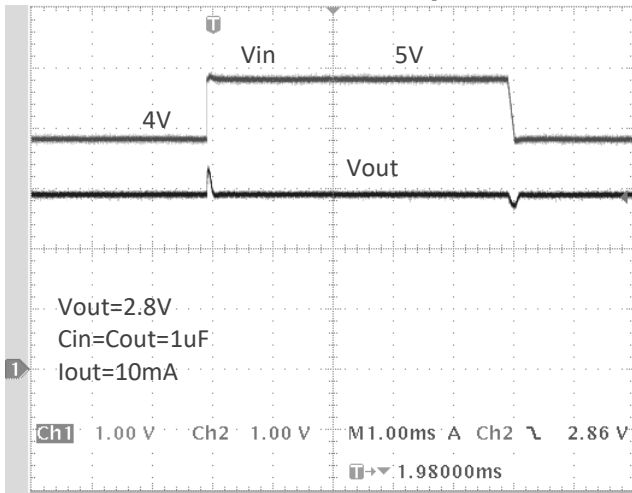

Load transient response

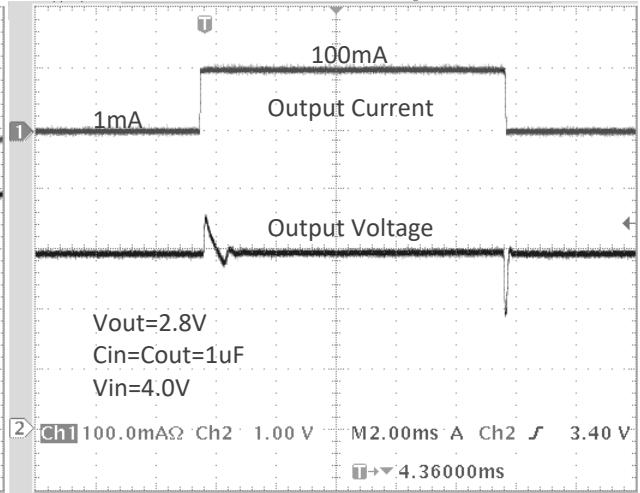


Start up

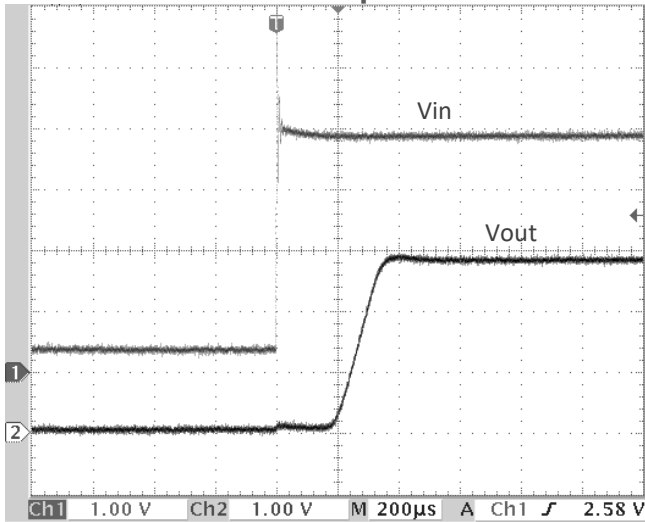

PACKAGE OUTLINE


Package	SOT23-3	Devices per reel	3000Pcs
Package dimension:			
<p>Technical drawing of the SOT23-3 package. The top view shows a rectangular body with a width of 2.9 ± 0.2 mm and a length of 1.9 ± 0.2 mm. The distance between the two leads (1 and 2) is 1.9 ± 0.2 mm, with each lead offset by 0.95 mm from the center. The lead width is 0.4 ± 0.1 mm. The body height is 1.6 ± 0.2 mm, and the total height including the lead is 2.8 ± 0.3 mm. The lead height is 1.4 mm maximum, with a top width of 1.1 ± 0.2 mm and a bottom width of 0.8 mm. The lead thickness is 0.2 mm minimum. The lead angle is 0 to 0.1 degrees. The lead length is 0.16 ± 0.1 mm. The lead is labeled with '1' and '2'. A third lead (3) is shown on the top surface with a width of 0.4 ± 0.1 mm. A perspective view shows the package from an isometric angle.</p>			
Unit: mm			

Package	SOT23-5	Devices per reel	3000pcs
Package dimension:			
<p>Technical drawing of the SOT23-5 package. The top view shows a rectangular body with a width of 2.9 ± 0.2 mm and a length of 1.9 ± 0.2 mm. The distance between the two leads (1 and 2) is 1.9 ± 0.2 mm, with each lead offset by 0.95 mm from the center. The lead width is 0.4 ± 0.1 mm. The body height is 1.6 ± 0.2 mm, and the total height including the lead is 2.8 ± 0.3 mm. The lead height is 1.1 ± 0.2 mm, with a top width of 1.1 ± 0.2 mm and a bottom width of 0.8 ± 0.1 mm. The lead thickness is 0.2 mm minimum. The lead angle is 0 to 0.1 degrees. The lead length is 0.15 ± 0.1 mm. The lead is labeled with '1', '2', '3', '4', and '5'. A perspective view shows the package from an isometric angle.</p>			
Unit: mm			

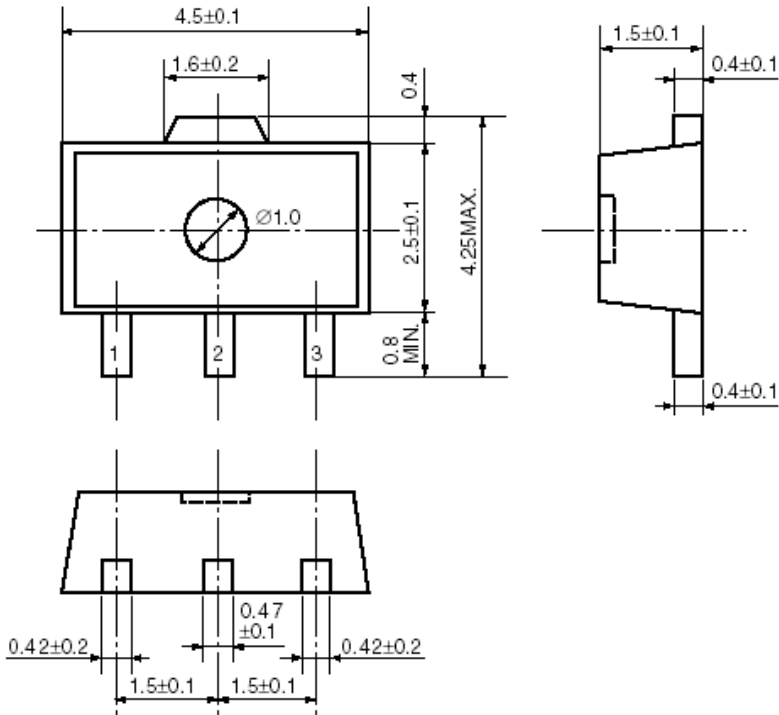Package	SOT89-3	Devices per reel	1000pcs
<p data-bbox="164 324 406 353">Package dimension:</p>  <p data-bbox="164 1093 271 1122">Unit: mm</p> <p>The technical drawing illustrates the SOT89-3 package in three views: top, side, and bottom. The top view shows a rectangular body with a width of 4.5 ± 0.1 mm and a central circular feature with a diameter of $\varnothing 1.0$ mm. A trapezoidal lead is positioned at the top with a width of 1.6 ± 0.2 mm. Three leads are located at the bottom, labeled 1, 2, and 3. The distance from the top edge to the center of the body is 2.5 ± 0.1 mm, and the total height is 4.25 mm maximum. The lead height is 0.4 mm, and the lead thickness is 0.8 mm minimum. The side view shows a trapezoidal lead with a top width of 1.5 ± 0.1 mm and a bottom width of 0.4 ± 0.1 mm. The bottom view shows the lead spacing: the distance between lead 1 and 2 is 1.5 ± 0.1 mm, between lead 2 and 3 is 1.5 ± 0.1 mm, and the distance from the center to lead 1 and lead 3 is 0.42 ± 0.2 mm. The lead width is 0.47 ± 0.1 mm.</p>			

Package	TO-92	Devices per bag	1000Pcs
		Devices per reel	2000Pcs

Package dimension:

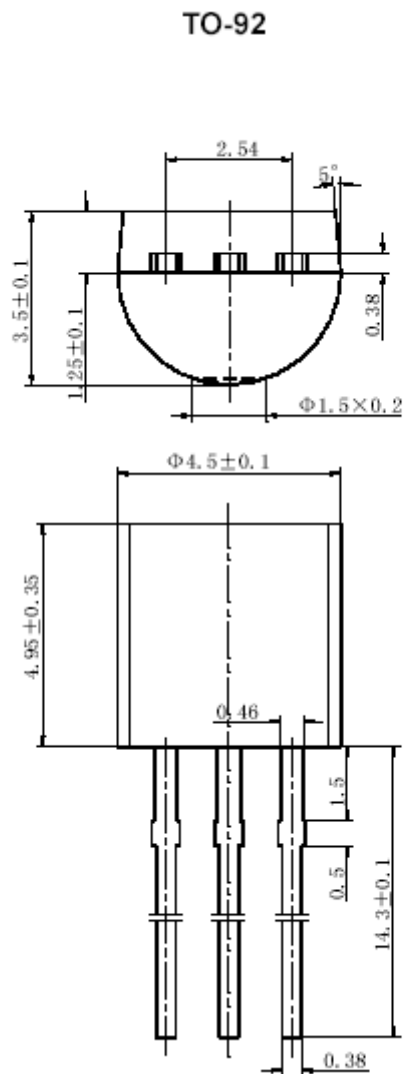

Unit: mm