

300mA High PSRR, Fast Response Linear Regulator

DESCRIPTION

BL8067 series is a group of positive voltage output, low power consumption, low dropout voltage regulator.

BL8067 can provide output value in the range of 1.0V~4.5V every 0.1V step. It also can be customized on command.

BL8067 includes high accuracy voltage reference, error amplifier, current limit circuit and output driver module with discharge capability.

BL8067 has excellent load and line transient response and good temperature characteristics, which can assure the stability of chip and power system. And it uses trimming technique to guarantee output voltage accuracy within $\pm 2\%$.

BL8067 is available in TSOT-23, SOT23-5 and DFN1x1-4 packages which are lead free.


FEATURES

- Low Power Consumption: 50uA (Typ.)
- Low output noise (47uVRMS)
- Standby Mode: 0.1uA
- Low dropout Voltage:
210mV@Iout=300mA, Vout=3V
- High Ripple Rejection: 68dB@1KHz (Typ.)
- Low Temperature Coefficient: $\pm 100\text{ppm}/^\circ\text{C}$
- Excellent Line regulation: 0.05%/V
- Build-in chip enable and discharge circuit
- Output Voltage Range: 1.0V~4.5V
(customized on command every 0.1V step)
- Highly Accurate: $\pm 2\%$
- Output Current Limit

APPLICATIONS


- Power source for cellular phones and various kind of PCSs
- Battery Powered equipment
- Power Management of MP3, PDA, DSC, Mouse, PS2 Games
- Reference Voltage Source
- Regulation after Switching Power

TYPICAL APPLICATION

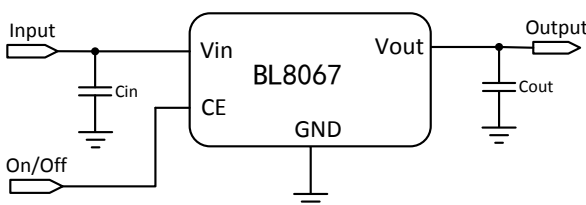

NOTE: Input capacitor (Cin=1uF) and Output capacitor (Cout=1uF) are recommended in all application circuit.

ELECTRICAL CHARACTERISTICS

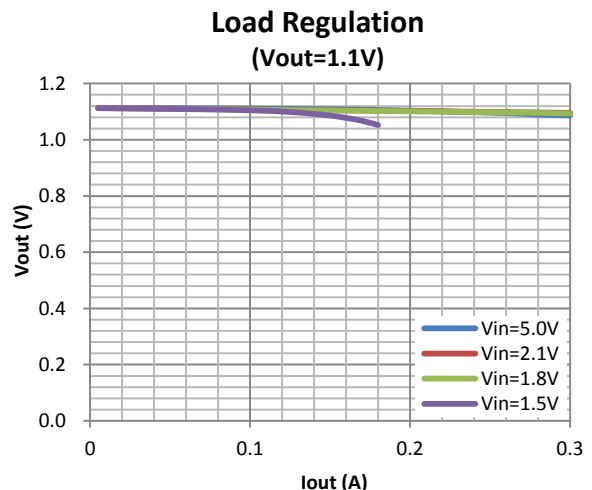

ORDERING INFORMATION

BL8067 ①②③④

Code	Description
①	Temperature&Rohs: C:-40~85°C ,Pb Free Rohs Std. A: short circuit current >100mA
②	Package type: B3A: TSOT-23 B5: SOT-23-5 B5B: SOT-23-5 (B) KE: DFN1x1-4
③	Packing type: TR:Tape&Reel (Standard)
④	Output voltage: e.g. 15=1.5V 18=1.8V 45=4.5V

MARKING DESRIPTON





U: Product Code
X: Output Voltage

Vout	Code	Vout	Code	Vout	Code
1.0V	0	2.3V	<u>3</u>	3.6V	<u>6</u>
1.1V	1	2.4V	<u>4</u>	3.7V	<u>7</u>
1.2V	2	2.5V	<u>5</u>	3.8V	<u>8</u>
1.3V	3	2.6V	<u>6</u>	3.9V	<u>9</u>
1.4V	4	2.7V	<u>7</u>	4.0V	<u>0</u>
1.5V	5	2.8V	<u>8</u>	4.1V	<u>1</u>
1.6V	6	2.9V	<u>9</u>	4.2V	<u>2</u>
1.7V	7	3.0V	<u>0</u>	4.3V	<u>3</u>
1.8V	8	3.1V	<u>1</u>	4.4V	<u>4</u>
1.9V	9	3.2V	<u>2</u>	4.5V	<u>5</u>
2.0V	<u>0</u>	3.3V	<u>3</u>		
2.1V	<u>1</u>	3.4V	<u>4</u>		
2.2V	<u>2</u>	3.5V	<u>5</u>		

Y: The Year of manufacturing, "1" stands for year 2011, "2" stands for year 2012, and "8" stands for year 2018.

W: The week of manufacturing. "A" stands for week 1, "Z" stands for week 26, "A" stands for week 27, "Z" stands for week 52.

PIN CONFIGURATION

Product Classification	BL8067CB3ATR□□
U: Product Code	TSOT-23 
X: Output Voltage	
YW: Date Code	
Product Classification	BL8067CB5TR□□
U: Product Code	SOT-23-5 
X: Output Voltage	
YW: Date Code	
Product Classification	BL8067CB5BTR□□
U: Product Code	SOT-23-5 (B) 
X: Output Voltage	
YW: Date Code	
Product Classification	BL8067CKETR□□
XX: Output Voltage	DFN1x1-4 
GND	Ground Pin
Vin	Supply Voltage Input
Vout	Output Voltage
CE	Chip Enable
NC	No Connection

ABSOLUTE MAXIMUM RATING

Parameter		Value
Max Input Voltage		8V
Operating Junction Temperature(Tj)		150°C
Output Current		300mA
Ambient Temperature(Ta)		-40°C –85°C
Package Thermal Resistance (θ_{JA})	SOT-23-5	220°C / W
	SOT-23-5 (B)	220°C / W
Power Dissipation	TSOT-23	250mW
	SOT-23-5	250mW
	SOT-23-5 (B)	250mW
	DFN1x1-4	600mW
Storage Temperature(Ts)		-40°C -150°C
Lead Temperature & Time		260°C,10S

Note:

- 1) Heat Sink Area of PCB for DFN1x1-4 is recommended at least 2.5mmx4mm.
- 2) Package Thermal Resistance value can be affected by PCB design, outside radiator, ambient airflow, operating power, it just shows for reference.
- 3) Exceed these limits to damage to the device.
- 4) Exposure to absolute maximum rating conditions may affect device reliability.

RECOMMENDED WORK CONDITIONS

Item	Min	Recommended	Max.	Unit
Input Voltage Range	1.5		6	V
Ambient Temperature	-40		85	°C

ELECTRICAL CHARACTERISTICS

(Test Conditions: $C_{in}=1\mu F$, $C_{out}=1\mu F$, $T_A=25^\circ C$, unless otherwise specified.)

BL8067, For Arbitrary Output Voltage

Symbol	Parameter		Conditions	Min	Typ	Max	Units
V_{in}	Input Voltage			1.5*		6	V
V_{out}	Output Voltage	$V_{OUT}>1.5V$	$V_{in}=\text{Set } V_{out}+1V$ $1mA \leq I_{out} \leq 30mA$	$V_{out} \times 0.98$	V_{out}	$V_{out} \times 1.02$	V
		$V_{OUT} \leq 1.5V$		$V_{out} - 0.03$		$V_{out} + 0.03$	
$I_{out}(\text{Max.})$	Maximun Output Current		$V_{in}-V_{out}=1V$	300			mA
V_{drop}^{**}	Dropout Voltage, $V_{out}=3V$		$I_{out}=200mA$		135	250	mV
			$I_{out}=300mA$		210	350	mV
$\frac{\Delta V_{out}}{\Delta V_{in} \cdot V_{out}}$	Line Regulation		$I_{out}=10mA$ $1.8V \leq V_{in} \leq 6V$		0.05	0.2	%/V
$\frac{\Delta V_{out}}{\Delta I_{out}}$	Load Regulation		$V_{in}=\text{Set } V_{out}+1V$ $1mA \leq I_{out} \leq 300mA$		50	80	mV
I_{ss}	Supply Current		$V_{in}=\text{Set } V_{out}+1V$		50	120	uA
$I_{standby}$	Supply Current (Srandby)		$V_{in}=\text{Set } V_{out}+1V$ $V_{ce}=\text{GND}$		0.1	1.0	uA


$\frac{\Delta V_{out}}{\Delta T \cdot V_{out}}$	Output Voltage Temperature Coefficiency	$I_{out}=30mA$		± 100		ppm/°C
PSRR	Ripple Rejection	F=1KHz, Ripple=0.5Vp-p Vin=Set Vout+1V		68		dB
Ilim	Current Limit	Vin=5V, Vout=3V		1		A
Rdischarge	Discharge Resistor	CE=0, Vout=3.0V		150		ohm
Vceh	CE Input Voltage "H"		0.95		Vin	V
Vcel	CE Input Voltage "L"		0		0.25	V
en	Output Noise	BW=10Hz~100kHz		47		uVrms

Note:

* $I_{out}=100mA$ @ $V_{out}=1.0V - 1.2V$

** $V_{drop}=Vin1-(V_{out2} \cdot 0.98)$ V_{out2} is the output voltage when $Vin=V_{out1}+1.0V$ and $I_{out}=300mA$. $Vin1$ is the input voltage at which the output voltage becomes 98% of V_{out1} after gradually decreasing the input voltage.

BLOCK DIAGRAM

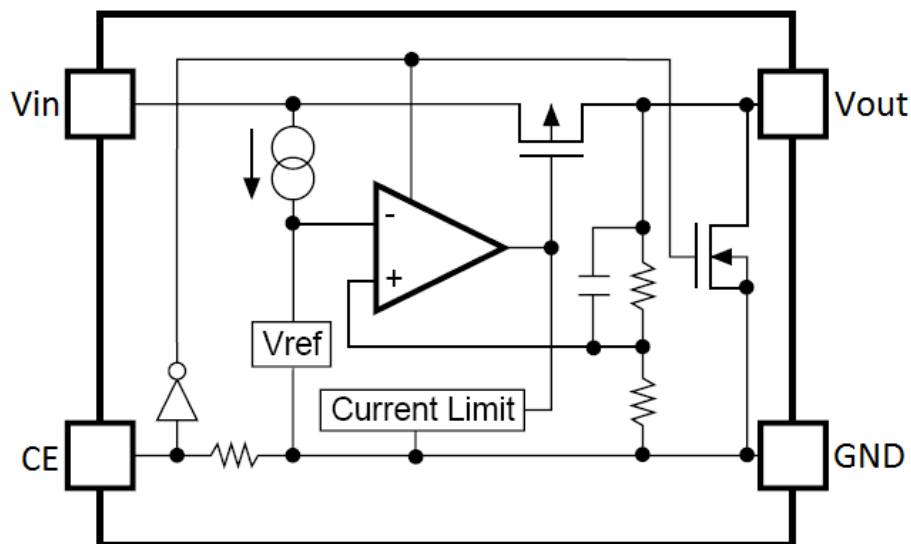

EXPLANATION

BL8067 series is a group of positive voltage output, low noise, low power consumption, low dropout voltage regulator.


BL8067 can provide output value in the range of 1.0V~4.5V every 0.1V step. It also can be customized on command.

BL8067 includes high accuracy voltage reference, error amplifier, current limit circuit and output driver module.


BL8067 has excellent load and line transient response and good temperature characteristics, which can assure the stability of chip and power system. And it uses trimming technique to guarantee output voltage accuracy within $\pm 2\%$.

TYPICAL PERFORMANCE CHARACTERISTICS


Load Regulation
(Vout=1.1V)

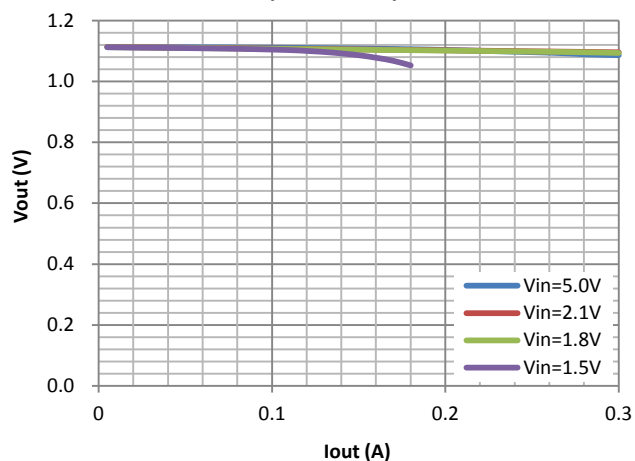


Load Regulation
(Vout=1.2V)

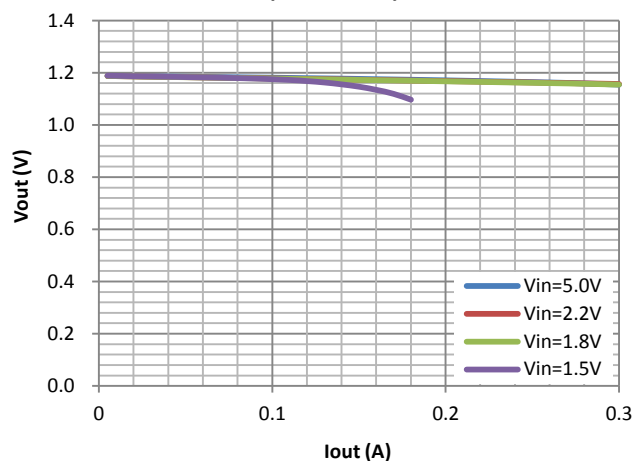


Load Regulation
(Vout=1.5V)

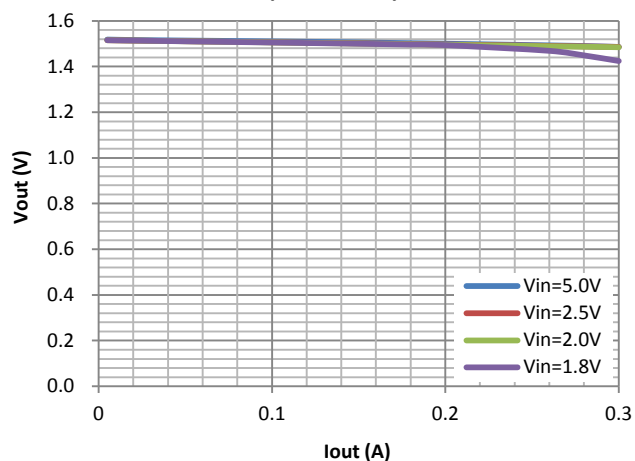


Load Regulation
(Vout=3V)






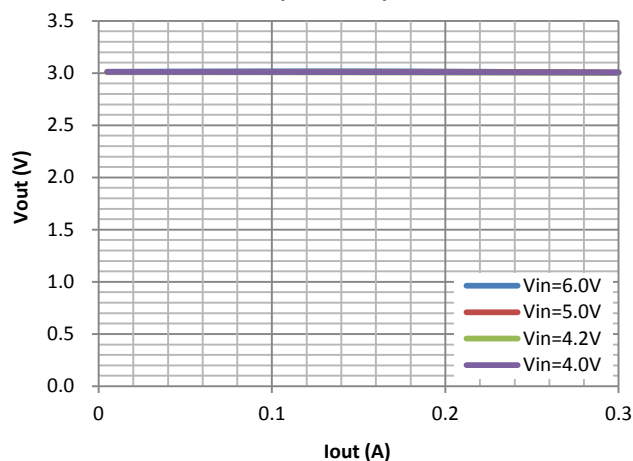


Line Regulation

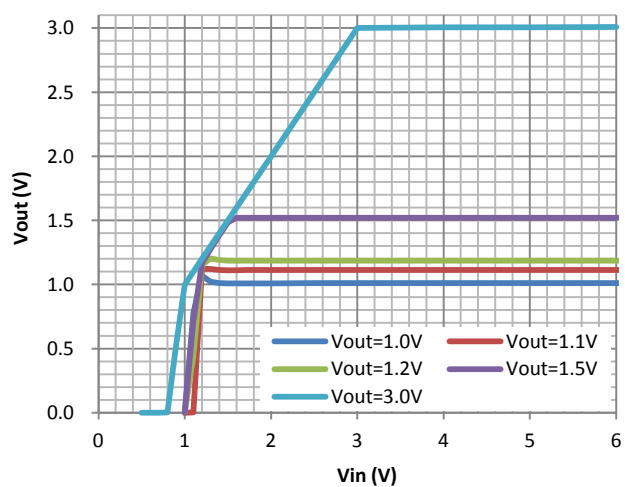



Line Regulation
(Vout=1.1V)

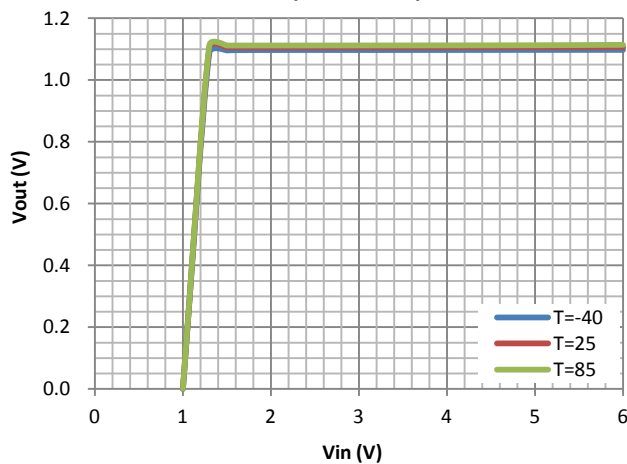

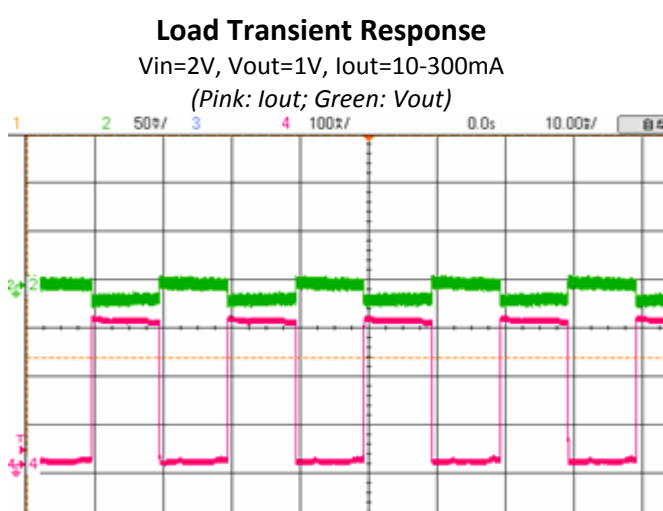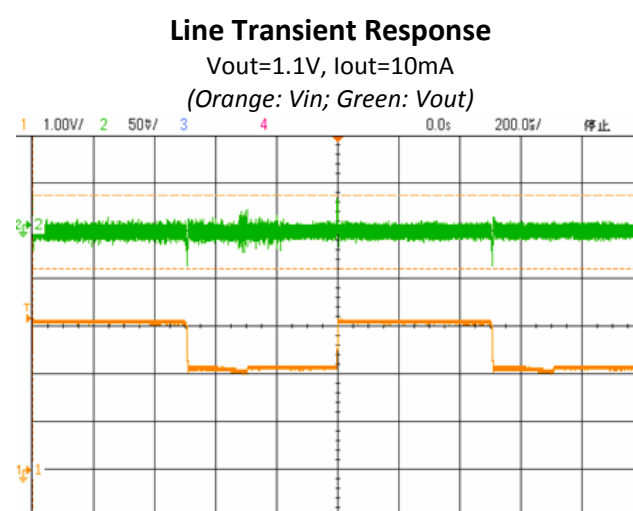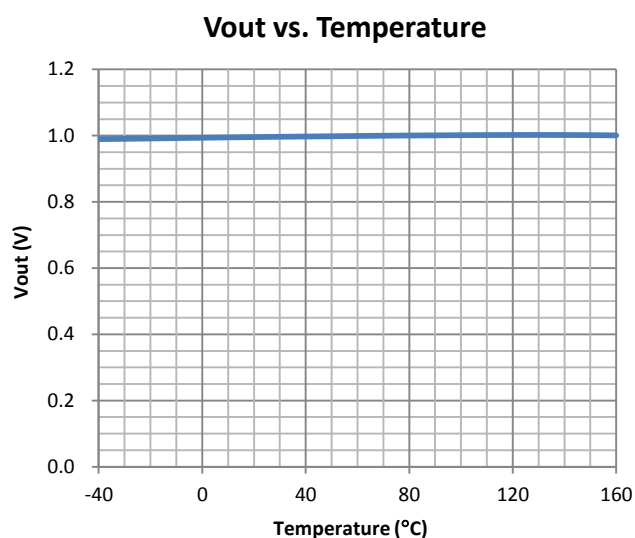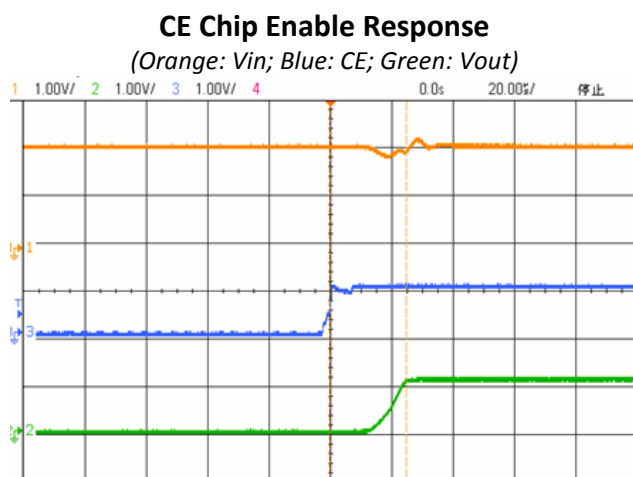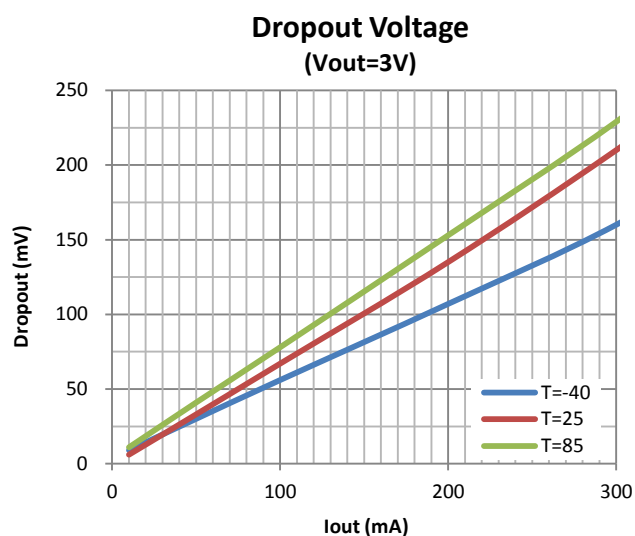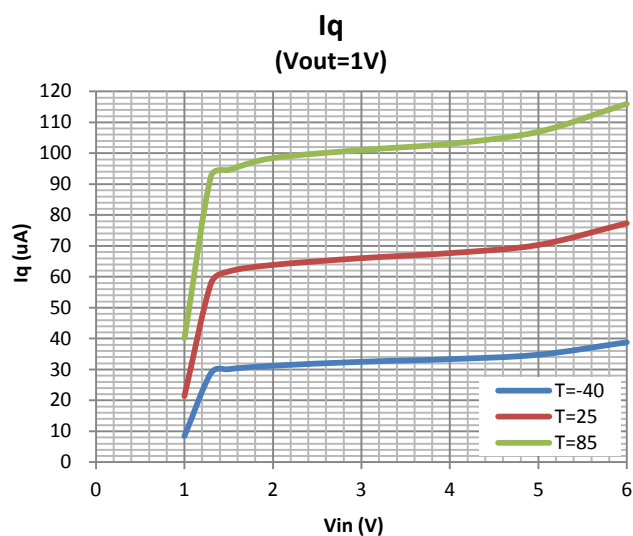

PACKAGE OUTLINE

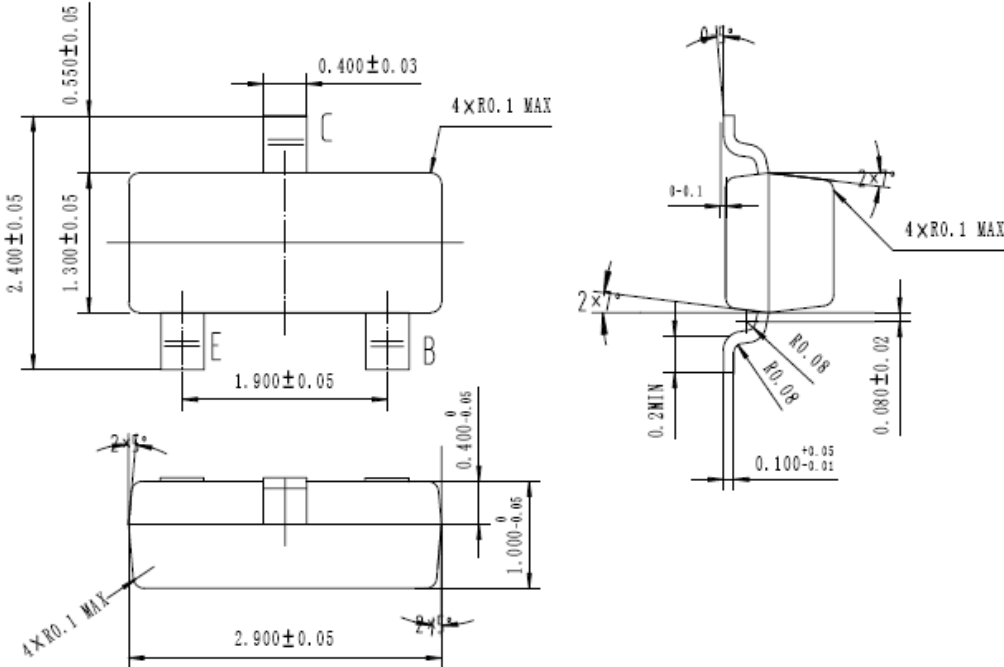Package	TSOT-23	Devices per reel	3000Pcs	Unit	mm
Package dimension:  Technical drawing of the TSOT-23 package showing three views: top, side, and cross-sectional views. The top view shows a rectangular package with dimensions: total width 2.400 ± 0.05, body width 1.300 ± 0.05, and pin pitch 1.900 ± 0.05. The side view shows a total height of 0.550 ± 0.05 and a body height of 0.400 ± 0.03. The cross-sectional view shows a maximum lead length of $4 \times R0.1$ MAX, a lead thickness of 0.080 ± 0.02, and a body thickness of $0.100^{+0.05}_{-0.01}$. Other dimensions include 0.2 MIN for the lead angle, 0.08 for the lead radius, and 2×7 for the lead width.					

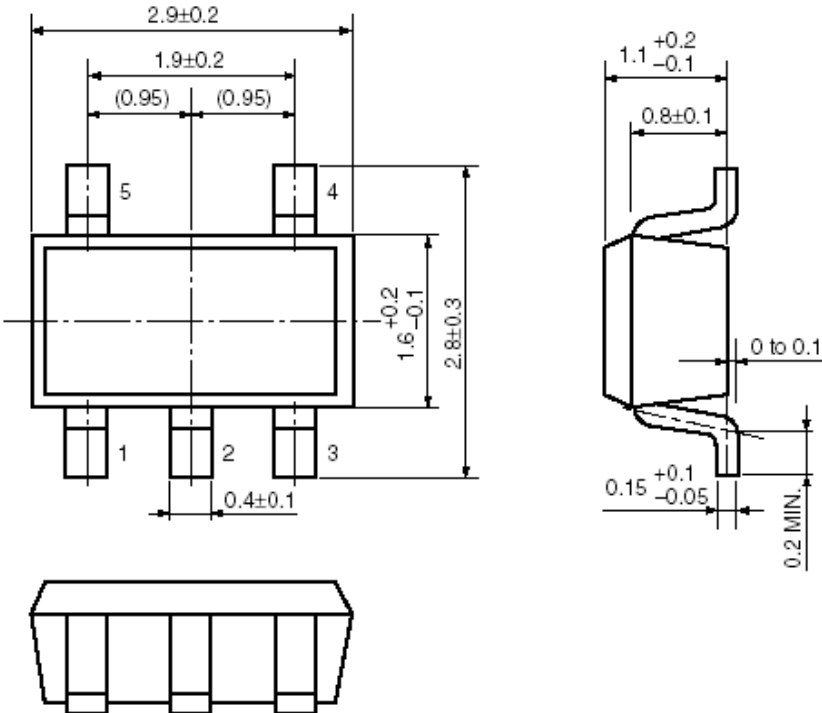Package	SOT-23-5	Devices per reel	3000Pcs	Unit	mm
Package Dimension:  Technical drawing of the SOT-23-5 package showing three views: top, side, and cross-sectional views. The top view shows a rectangular package with dimensions: total width 2.9 ± 0.2, body width 1.9 ± 0.2, and pin pitch 0.4 ± 0.1. The side view shows a total height of 2.8 ± 0.3 and a body height of $1.6^{+0.2}_{-0.1}$. The cross-sectional view shows a maximum lead length of $1.1^{+0.2}_{-0.1}$, a lead thickness of $0.15^{+0.1}_{-0.05}$, and a body thickness of 0.2 MIN. Other dimensions include 0.8 ± 0.1 for the lead width, 0 to 0.1 for the lead angle, and 0.95 for the pin width.					

Package	DFN1x1-4	Devices per reel	5000Pcs	Unit	mm
---------	----------	------------------	---------	------	----

Package dimension:

Technical drawing showing the package dimensions and a table of common dimensions.

Top view dimensions: D, E, D2, E2, b, e, J, K, (C0.12), 1, 2, 3, 4.

Side view dimensions: A, A1, (A3).

Cross-sectional view dimensions: A, A1, (A3).

COMMON DIMENSIONS
(UNITS OF MEASURE=MILLIMETER)

SYMBOL	MIN	NOM	MAX
A	0.50	0.55	0.60
A1	0.00	0.02	0.05
A3	0.100REF		
b	0.17	0.22	0.27
D	0.95	1.00	1.05
E	0.95	1.00	1.05
D2	0.43	0.48	0.53
E2	0.43	0.48	0.53
L	0.20	0.25	0.30
e	0.60	0.65	0.70
K	0.15	-	-

Notes: All dimensions are in millimeters exclude mold flash or protrusions.