



TO-92 Plastic-Encapsulate Transistors


STB1277 TRANSISTOR (PNP)

FEATURES


- Audio power amplifier
- High current application
- High current : $I_C = -2A$
- Complementary pair with STD1862

TO-92

1. EMITTER
2. COLLECTOR
3. BASE




MARKING



B1277=Device code
Solid dot= Green molding compound device,
if none, the normal device
XXX=Code

Equivalent Circuit



ORDERING INFORMATION

Part Number	Package	Packing Method	Pack Quantity
STB1277	TO-92	Bulk	1000pcs/Bag
STB1277-TA	TO-92	Tape	2000pcs/Box

MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	-30 V	
V_{CEO}	Collector-Emitter Voltage	-30 V	
V_{EBO}	Emitter-Base Voltage	-5	V
I_C	Collector Current -Continuous	-2	A
P_C	Collector Power Dissipation	625	mW
T_J, T_{stg}	Operation Junction and Storage Temperature Range	-55-150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS



$T_a=25^{\circ}\text{C}$ unless otherwise specified

Parameter	Symbol	T est condi tions	Min	T yp	Max	Unit
Collector-base breakdown voltage	V_{CBO}	$I_C = -100\mu\text{A}$, $I_E = 0$ -30				V
Collector-emitter breakdown voltage	V_{CEO}	$I_C = -1\text{mA}$, $I_B = 0$ -30				V
Emitter-base breakdown voltage	V_{EBO}	$I_E = -1\text{mA}$, $I_C = 0$ -5				V
Collector cut-off current	I_{CBO}	$V_{CB} = -30\text{V}$, $I_E = 0$			-0.1	μA
Emitter cut-off current	I_{EBO}	$V_{EB} = -5\text{V}$, $I_C = 0$			-0.1	μA
DC current gain	h_{FE}	$V_{CE} = -2\text{V}$, $I_C = -500\text{mA}$	100		320	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = -2\text{A}$, $I_B = -0.2\text{A}$			-0.8	V
Base-emitter on voltage	$V_{BE(on)}$	$V_{CE} = -2\text{V}$, $I_C = -500\text{mA}$			-1	V
Transition frequency	f_T	$V_{CE} = -5\text{V}$, $I_C = -50\text{mA}$		170		MHz
Collector Output Capacitance	C_{ob} V	$V_{CB} = -10\text{V}$, $I_E = 0$, $f = 1\text{MHz}$	48			pF

CLASSIFICATION h_{FE}


Rank	O	Y
Range	100-200	160- 320

TO-92 Package Outline Dimensions

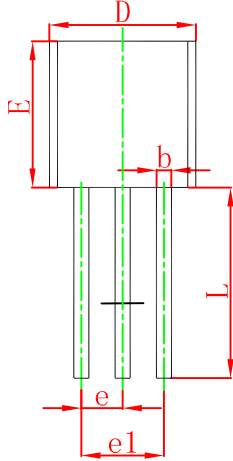

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	3.300	3.700	0.130	0.146
A1	1.100	1.400	0.043	0.055
b	0.380	0.550	0.015	0.022
c	0.360	0.510	0.014	0.020
D	4.300	4.700	0.169	0.185
D1	3.430		0.135	
E	4.300	4.700	0.169	0.185
e	1.270 TYP		0.050 TYP	
e1	2.440	2.640	0.096	0.104
L	14.100	14.500	0.555	0.571
Φ		1.600		0.063
h	0.000	0.380	0.000	0.015

TO-92 Suggested Pad Layout

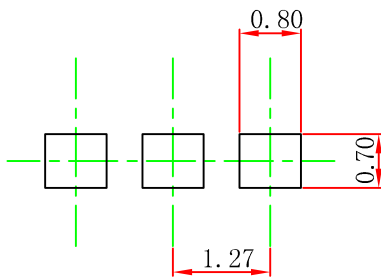


Note:

1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.


NOTICE

JSCJ reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. JSCJ does not assume any liability arising out of the application or use of any product described herein.

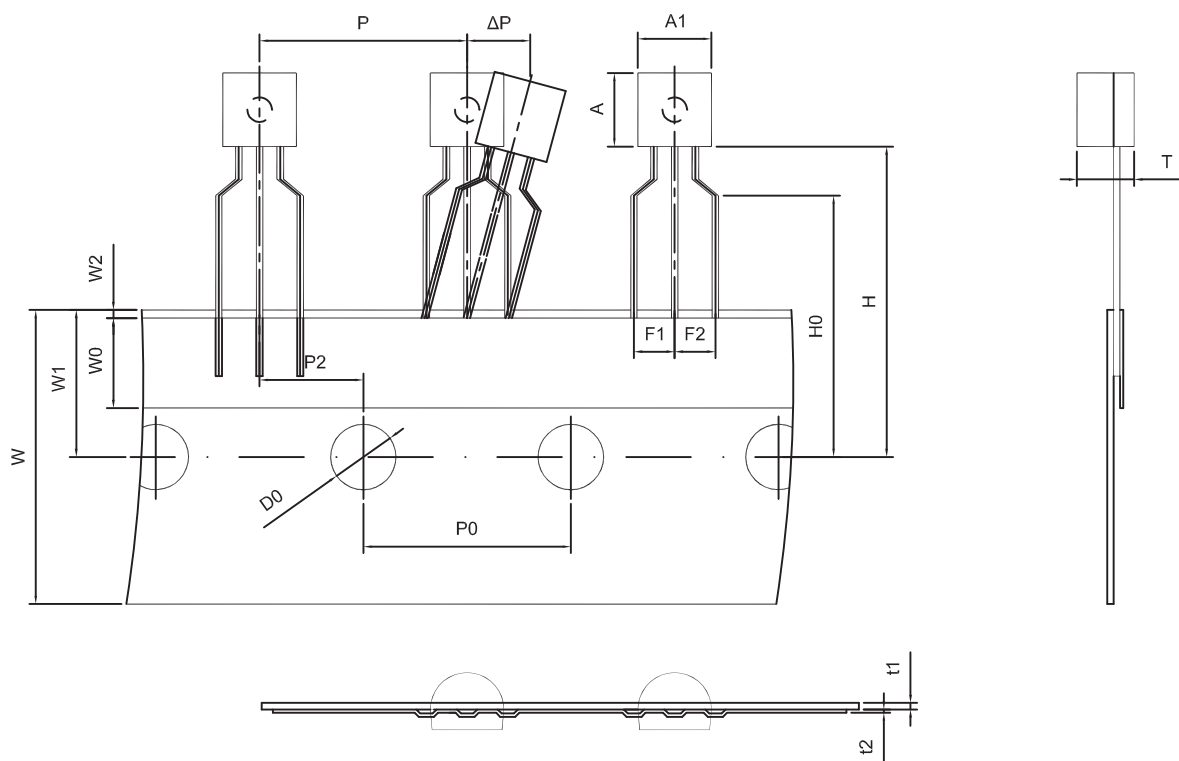

Dimiensions are in millimeter

A1	A	T	P	P0	P2	F1	F2	W
4.5	4.5	3.5	12.7	12.7	6.35	2.5	2.5	18.0
W0	W1	W2	H	H0	D0	t1	t2	ΔP
6.0	9.0	1.0 MAX.	19.0	16.0	4.0	0.4	0.2	0

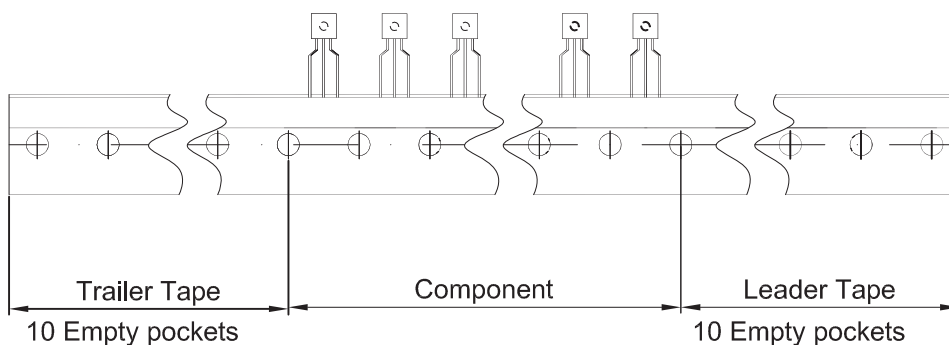

Package	Box	Box Size(mm)	Carton	Carton Size(mm)
TO-92	2000 pcs	333×162×43	20,000 pcs	350×340×250