


SR120S THRU SR1200S

SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 20 to 200 Volts Forward Current - 1.0 Ampere

A-405

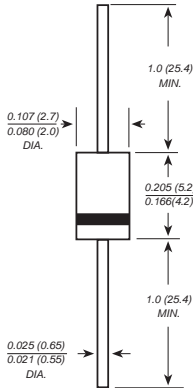

Dimensions in inches and (millimeters)

FEATURES

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction, majority carrier conduction
- Low power loss, high efficiency
- High forward surge current capability
- High temperature soldering guaranteed:
260°C/10 seconds, 0.375" (9.5mm) lead length,
5 lbs. (2.3kg) tension

MECHANICAL DATA

Case: JEDEC A-405 molded plastic body

Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.008 ounce, 0.23 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

	SYMBOLS	SR 120S	SR 130S	SR 140S	SR 150S	SR 160S	SR 170S	SR 180S	SR 190S	SR 1A0S	SR 1150S	SR 1200S	UNITS	
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	50	60	70	80	90	100	150	200	V	
Maximum RMS voltage	V _{RMS}	14	21	28	35	42	49	56	63	70	105	140	V	
Maximum DC blocking voltage	V _{DC}	20	30	40	50	60	70	80	90	100	150	200	V	
Maximum average forward rectified current 0.375" (9.5mm) lead length(see fig.1)	I _(AV)	1.0											A	
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	30.0											A	
Maximum instantaneous forward voltage at 1.0A	V _F	0.55			0.70			0.85			0.95		V	
Maximum DC reverse current T _A =25°C at rated DC blocking voltage T _A =100°C	I _R	0.5								0.2		mA		
		10.0					5.0			2.0				
Typical junction capacitance (NOTE 1)	C _J	110			80									pF
Typical thermal resistance (NOTE 2)	R _{θJA}	50.0											°C/W	
Operating junction temperature range	T _J	-55 to +125						-55 to +150					°C	
Storage temperature range	T _{STG}	-55 to +150											°C	


Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

RATINGS AND CHARACTERISTIC CURVES SR120S THRU SR1200S

AVERAGE FORWARD RECTIFIED CURRENT,
AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE

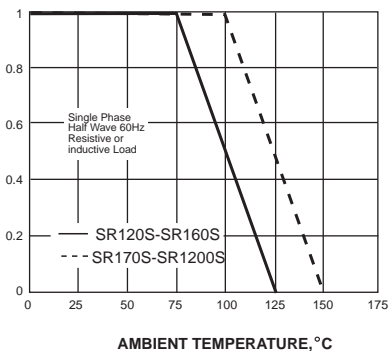

PEAK FORWARD SURGE CURRENT,
AMPERES

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT


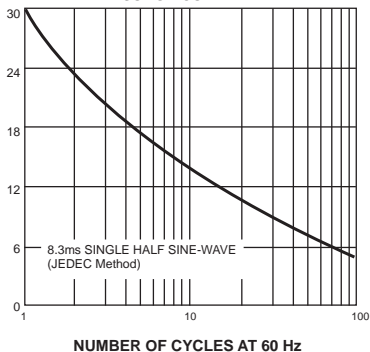


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

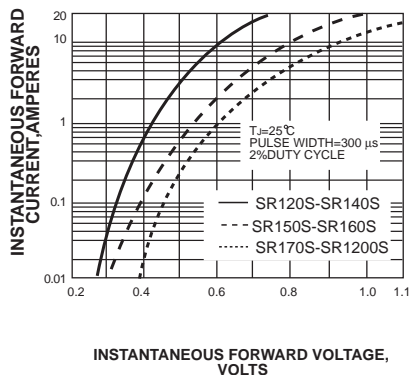

INSTANTANEOUS REVERSE CURRENT,
MILLIAMPERES

FIG. 4-TYPICAL REVERSE CHARACTERISTICS


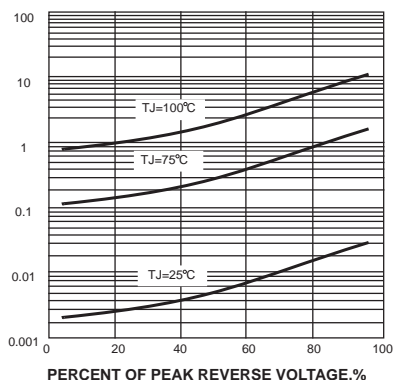


FIG. 5-TYPICAL JUNCTION CAPACITANCE



TRANSIENT THERMAL IMPEDANCE,
°C/W

FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

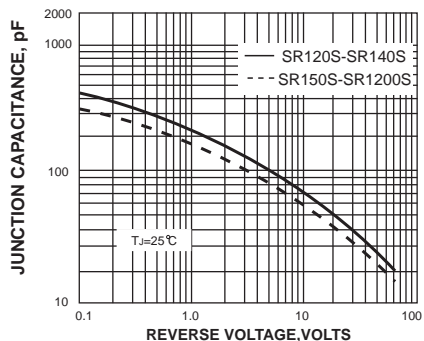