

SMAF Plastic-Encapsulate Diodes

ES2AF THRU ES2JF Super Fast Recovery Rectifier Diodes

Features

- $I_{F(AV)}$ 2A
- V_{RRM} 50V-600V
- High surge current capability
- Polarity: Color band denotes cathode


Applications

- Rectifier

Marking

- ES2X

X : From A To J

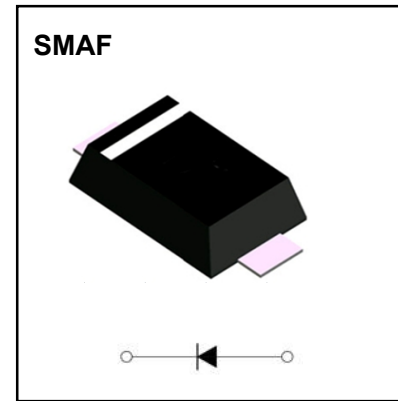

Limiting Values(Absolute Maximum Rating)

Item	Symbol	Unit	Test Conditions	ES2							
				AF	BF	CF	DF	EF	GF	HF	JF
Repetitive Peak Reverse Voltage	V_{RRM}	V		50	100	150	200	300	400	500	600
Maximum RMS Voltage	V_{RMS}	V		35	70	105	140	210	280	350	420
Average Forward Current	$I_{F(AV)}$	A	60Hz Half-sine wave , Resistance load	2.0							
Surge(Non-repetitive)Forward Current	I_{FSM}	A	60Hz Half-sine wave , 1 cycle, $T_a=25^{\circ}\text{C}$	50							
Operation Junction and Storage Temperature Range	T_J, T_{STG}	$^{\circ}\text{C}$		-55 ~ +150							

Electrical Characteristics (T=25°C Unless otherwise specified)

Item	Symbol	Unit	Test Condition		ES2							
					AF	BF	CF	DF	EF	GF	HF	JF
Maximum Forward Voltage	V _F	V	I _F =2.0A		0.95				1.3		1.7	
Maximum Reverse Recovery time	t _{rr}	ns	I _F =0.5A,I _R =1.0A,I _{rr} =0.25A		35							
Maximum Reverse Current	I _{RRM1}	μA	V _{RM} =V _{RRM}	T _a =25℃	5							
	T _a =125℃			50								
Thermal Resistance(Typical)	R _{θJ-A}	℃/W	Between junction and ambient		97							
	R _{θJ-L}		Between junction and terminal		10.5							
Juction Capacitance (Typical)	Cj	pF	Measured at 1MHZ and Applied Reverse Voltage of 4.0 V.D.C		26				20			

Notes:

Thermal resistance from junction to ambient and from junction to lead mounted on FR4 PCB double sided copper mini pad

Typical Characteristics

FIG.1: FORWARD CURRENT DERATING CURVE


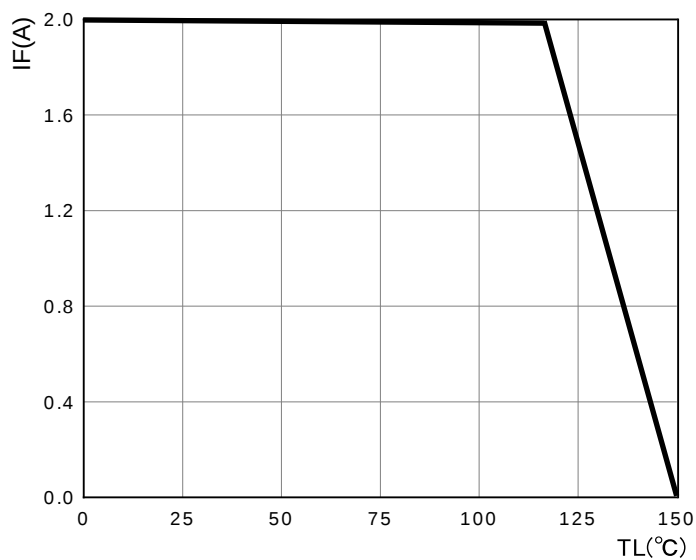


FIG 2: MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT




ES2AF-ES2DF

FIG.3 : TYPICAL FORWARD CHARACTERISTICS

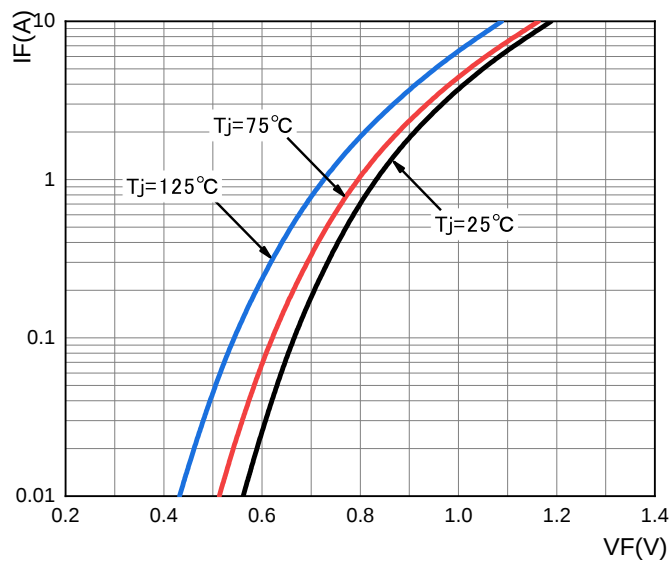


ES2AF-ES2DF

FIG.4 TYPICAL REVERSE CHARACTERISTICS

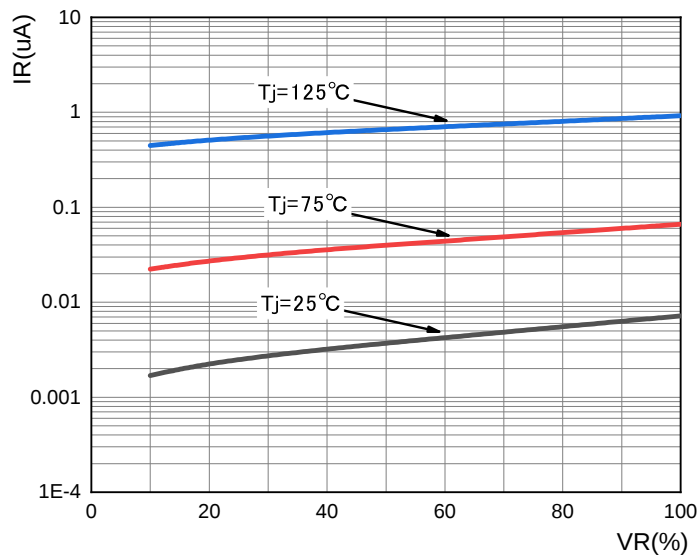


ES2EF-ES2GF

FIG.5 : TYPICAL FORWARD CHARACTERISTICS

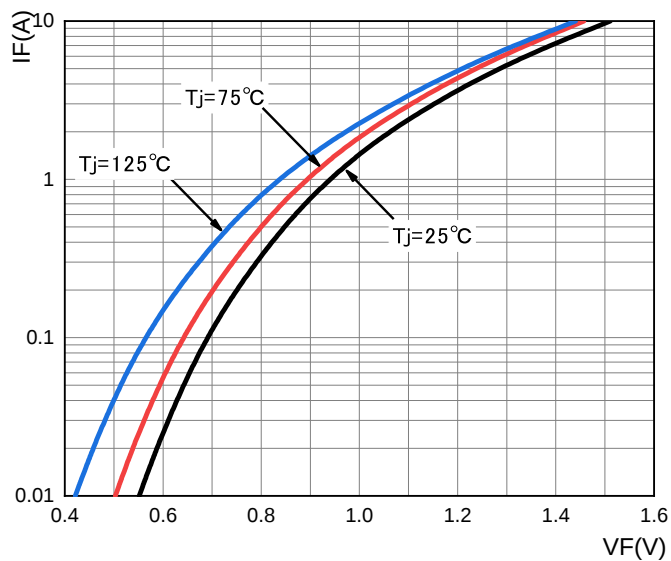


ES2EF-ES2GF

FIG.6 TYPICAL REVERSE CHARACTERISTICS

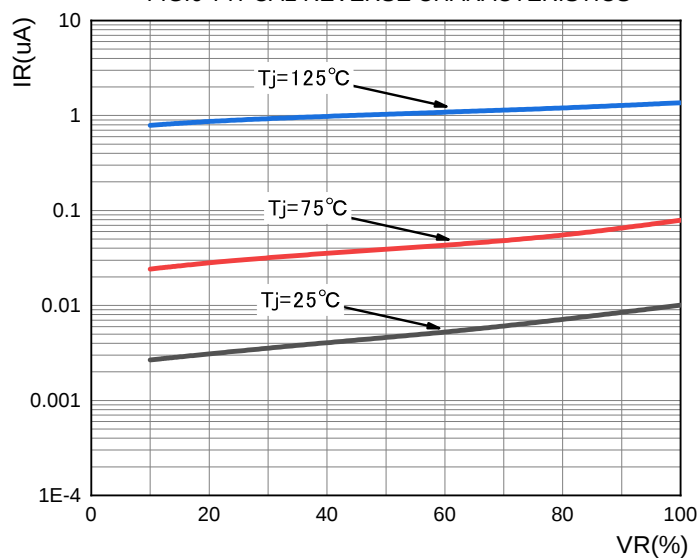


ES2HF-ES2JF

FIG.7 : TYPICAL FORWARD CHARACTERISTICS

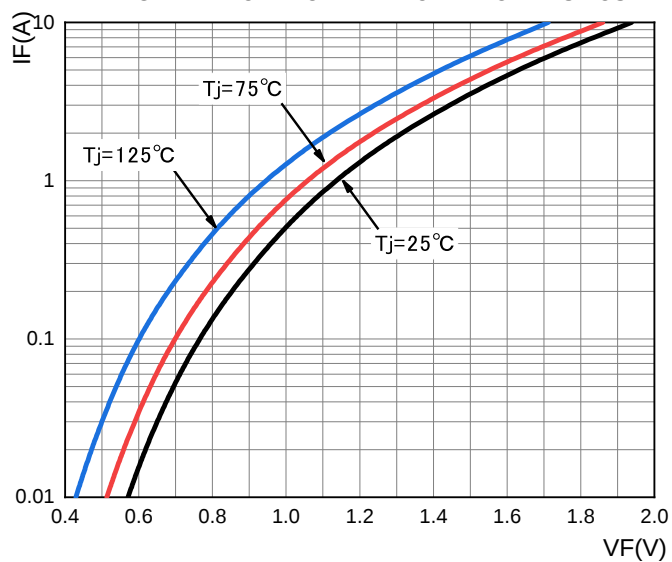


ES2HF-ES2JF

FIG.8 TYPICAL REVERSE CHARACTERISTICS

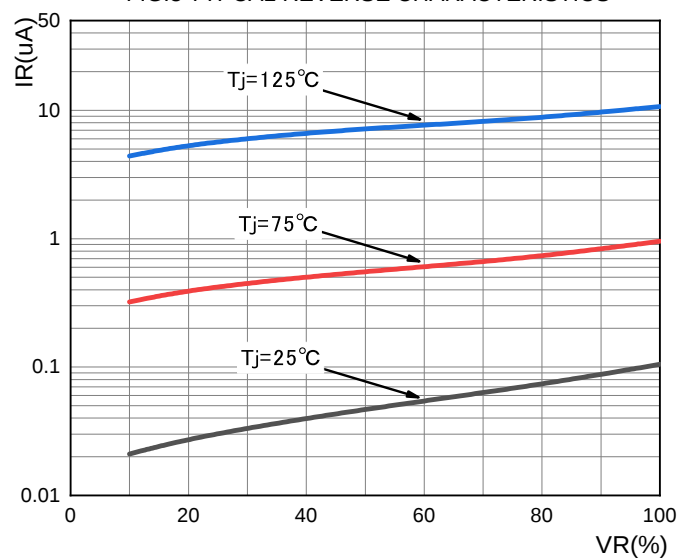


SMAF Package Outline Dimensions

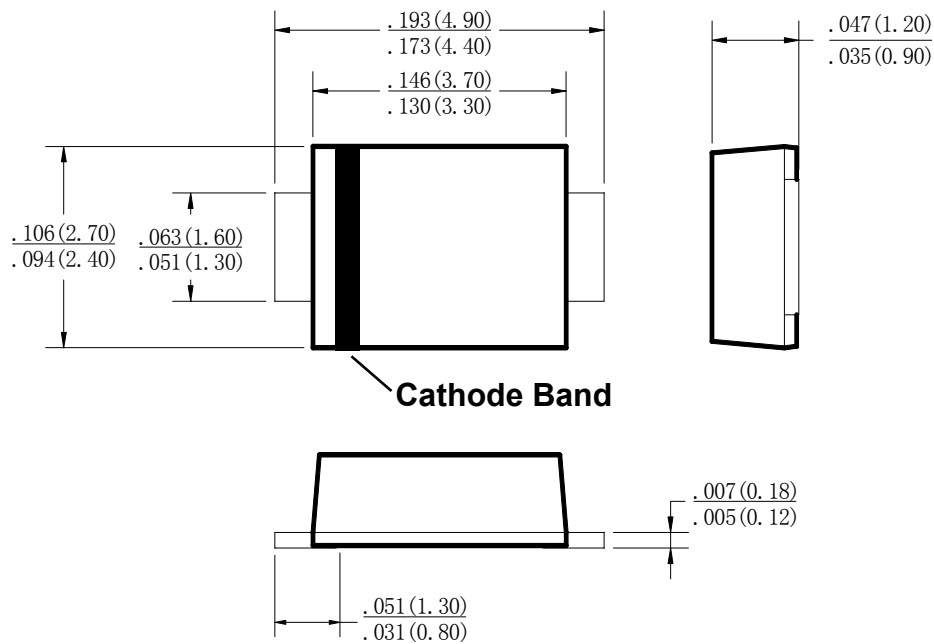

Dimensions in inches and (millimeters)

SMAF Suggested Pad Layout

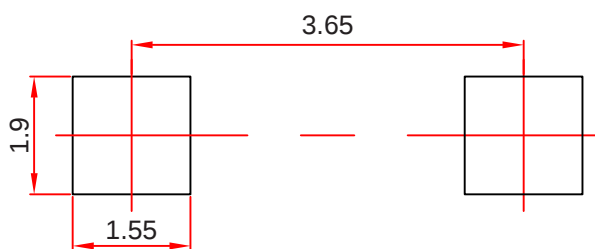

Note:

1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.

NOTICE

JSCJ reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. JSCJ does not assume any liability arising out of the application or use of any product described herein.

Reel Taping Specifications For Surface Mount Devices- SMAF

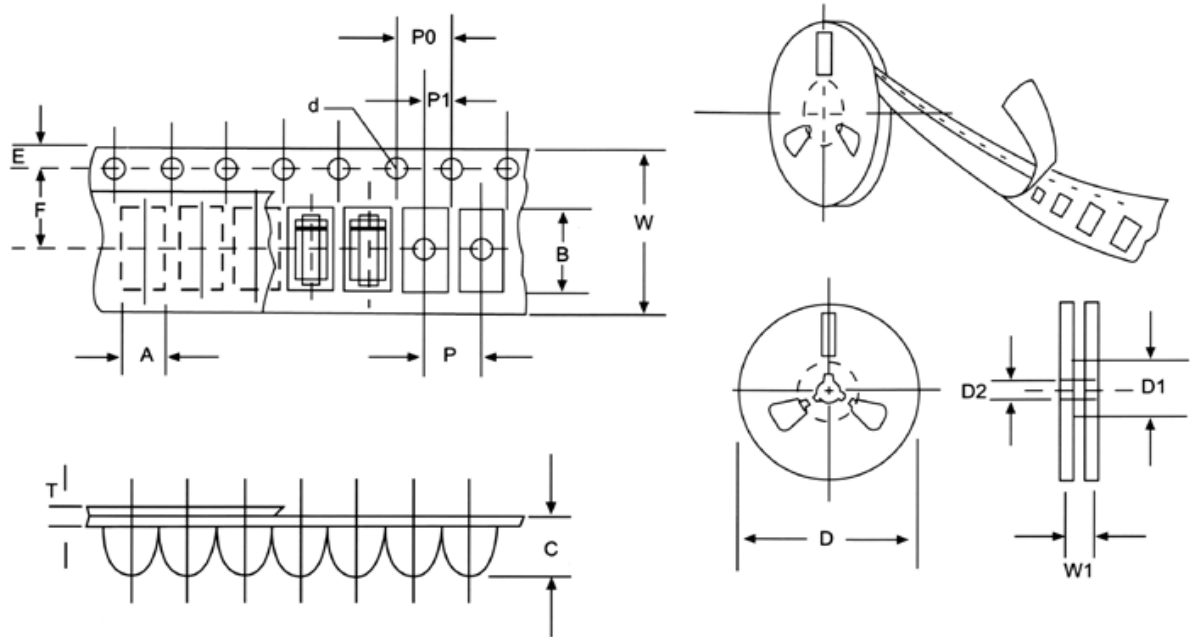


FIG:CONFIGURATION OF SURFACE MOUNTED DEVICES TAPING

ITEM	SYMBOL	SMAF mm(inch)
Carrier width	A	2.83±0.1(0.112±0.004)
Carrier length	B	4.90±0.1(0.193±0.004)
Carrier depth	C	1.45±0.1(0.057±0.004)
Sprocket hole	d	1.55±0.05(0.061±0.002)
Reel outside diameter	D	178±2.0(7.0±0.079)
Reel inner diameter	D1	54±1.0(2.13 ±0.039)
Feed hole diameter	D2	13±0.5(0.512±0.020)
Sprocket hole position	E	1.75±0.1(0.069±0.004)
Punch hole position	F	5.5±0.05(0.217±0.002)
Punch hole pitch	P	4.0±0.1(0.157±0.004)
Sprocket hole pitch	P0	4.0±0.1(0.157±0.004)
Embossment center	P1	2.0±0.1(0.079±0.004)
Totall tape thickness	T	0.23-0.29(0.009-0.011)
Tape width	W	12.0±0.1(0.472±0.004)
Reel width	W1	16.8±2.0(0.661±0.079)

NOTE:Devices are packde in accordance with EIA standard RS-481-A and specification given above.