

1. Description

BL40N25, the silicon N-channel Enhanced MOSFETs, is obtained by advanced MOSFET technology which reduce the conduction loss, improve switching performance and enhance the avalanche energy. The transistor is suitable device for SMPS, high speed switching and general purpose applications.

KEY CHARACTERISTICS


Parameter	Value	Unit
V_{DS}	250	V
I_D	40	A
$R_{DS(ON).Typ}$	0.065	Ω

FEATURES

- Fast Switching
- Low C_{rss}
- 100% avalanche tested
- Improved dv/dt capability
- RoHS product



APPLICATIONS

- High frequency switching mode power supply

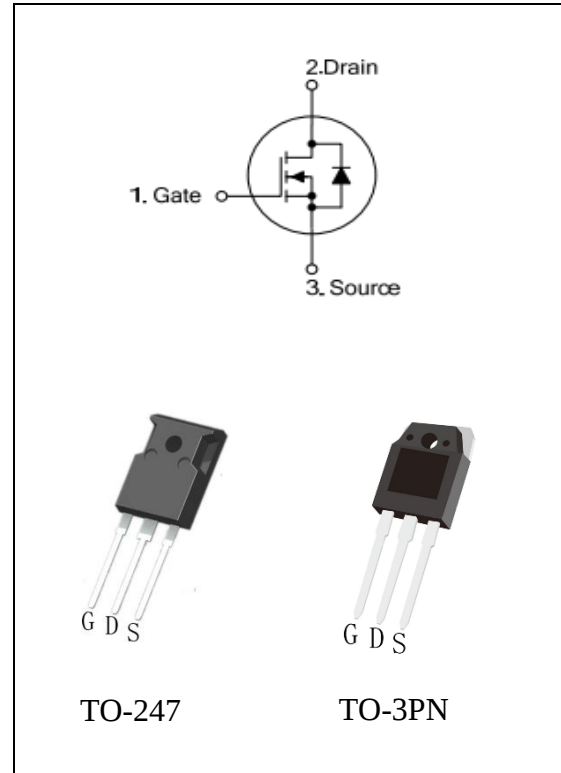

ORDERING INFORMATION

Ordering Codes	Package	Product Code	Packing
BL40N25-F	TO-247	40N25	Tube
BL40N25-W	TO-3PN		Tube

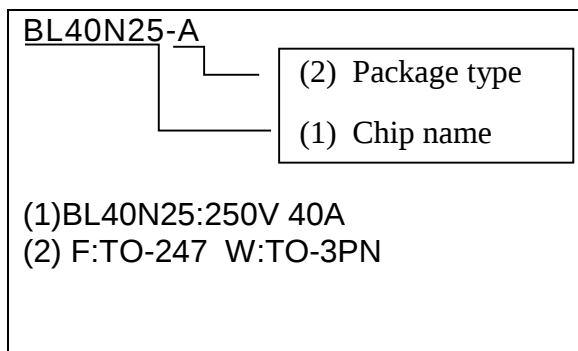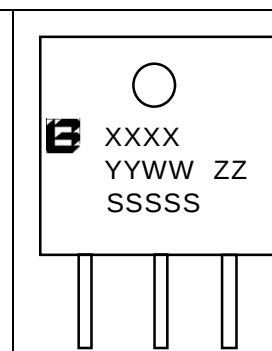BL40N25-A  (1) BL40N25:250V 40A (2) F:TO-247 W:TO-3PN	 XXXX: Product Code YYWW: Year&Week ZZ: Assembly Code SSSS: Lot Code
---	---

2. ABSOLUTE RATINGS

 at $T_C = 25^{\circ}\text{C}$, unless otherwise specified

Symbol	Parameter	Rating	Units
V_{DS}	Drain-to-Source Voltage	250	V
I_D	Continuous Drain Current	40	A
	Continuous Drain Current $T_C = 100^{\circ}\text{C}$	26	A
I_{DM}	Pulsed Drain Current(Note1)	160	A
V_{GS}	Gate-to-Source Voltage	± 30	V
E_{AS}	Single Pulse Avalanche Energy(Note2)	2000	mJ
dv/dt	Peak Diode Recovery dv/dt (Note3)	5.0	V/ns
PD	Power Dissipation	310	W
	Derating Factor above 25°C	2.78	W/ $^{\circ}\text{C}$
T_J, T_{stg}	Operating Junction and Storage Temperature Range	150, -55 to 150	$^{\circ}\text{C}$
T_L	Maximum Temperature for Soldering	300	$^{\circ}\text{C}$

3. Thermal characteristics

Thermal characteristics TO-220

Symbol	Parameter	RATINGS	Units
$R_{\theta JC}$	Junction-to-Case	0.36	$^{\circ}\text{C}/\text{W}$
$R_{\theta JA}$	Junction-to-Ambient	62.5	$^{\circ}\text{C}/\text{W}$

4. Electrical Characteristics

at $T_c = 25^\circ\text{C}$, unless otherwise specified

OFF Characteristics						
Symbol	Parameter	Test Conditions	Values			Units
			Min.	Typ.	Max.	
V_{DSS}	Drain to Source Breakdown Voltage	$V_{GS}=0V$, $I_D=250\mu A$	250	--	--	V
$\Delta BV_{DSS}/\Delta T_J$	Bvdss Temperature Coefficient	$I_D=250\mu A$, Reference 25°C	--	0.18	--	V/ $^\circ\text{C}$
I_{DSS}	Drain to Source Leakage Current	$V_{DS}=250V$, $V_{GS}=0V$, $T_J=25^\circ\text{C}$	--	--	1	μA
		$V_{DS}=200V$, $V_{GS}=0V$, $T_J=125^\circ\text{C}$	--	--	10	μA
$I_{GSS(F)}$	Gate to Source Forward Leakage	$V_{GS}=+30V$	--	--	100	nA
$I_{GSS(R)}$	Gate to Source Reverse Leakage	$V_{GS}=-30V$	--	--	-100	nA

ON Characteristics						
Symbol	Parameter	Test Conditions	Values			Units
			Min.	Typ.	Max.	
$R_{DS(ON)}$	Drain-to-Source On-Resistance	$V_{GS}=10V$, $I_D=20A$ (Note4)	--	0.065	0.08	Ω
$V_{GS(TH)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}$, $I_D=250\mu A$ (Note4)	2.0	--	4.0	V
g_{fs}	Forward Transconductance	$V_{DS}=40V$, $I_D=20A$ (Note4)	--	27	--	S

Dynamic Characteristics						
Symbol	Parameter	Test Conditions	Values			Units
			Min.	Typ.	Max.	
R_g	Gate resistance	$f=1.0\text{MHz}$	--	1.8	--	Ω
C_{iss}	Input Capacitance	$V_{GS}=0V$ $V_{DS}=25V$ $f=1.0\text{MHz}$	--	3700	--	PF
C_{oss}	Output Capacitance		--	360	--	
C_{rss}	Reverse Transfer Capacitance		--	2.5	--	

Switching Characteristics

Symbol	Parameter	Test Conditions	Values			Units
			Min.	Typ.	Max.	
$t_{d(ON)}$	Turn-on Delay Time	ID =40A VDD = 125V VGS = 10V RG =15Ω	--	80	--	ns
t_r	Rise Time		--	620	--	
$t_{d(OFF)}$	Turn-Off Delay Time		--	140	--	
t_f	Fall Time		--	183	--	
Q_g	Total Gate Charge	ID =40A VDD =200V VGS = 10V	--	40	--	nC
Q_{gs}	Gate to Source Charge		--	14	--	
Q_{gd}	Gate to Drain ("Miller")Charge		--	11	--	

Source-Drain Diode Characteristics

Symbol	Parameter	Test Conditions	Values			Units
			Min.	Typ.	Max.	
I_S	Continuous Source Current (Body Diode)	TC=25 °C	--	--	40	A
I_{SM}	Maximum Pulsed Current (Body Diode)		--	--	160	A
V_{SD}	Diode Forward Voltage	IS=40A, VGS=0V(Note4)	--	--	1.2	V
T_{rr}	Reverse Recovery Time	IS=40A, Tj = 25°C dIF/dt=100A/us, VGS=0V	--	230	--	ns
Q_{rr}	Reverse Recovery Charge		--	2150	--	nC

Note1: Pulse width limited by maximum junction temperature

Note2: L=10mH, VD=50V, Start TJ=25°C

Note3: ISD =40A, di/dt ≤100A/us, VDD≤BVDS, Start TJ=25°C

Note4: Pulse width tp≤300μs, δ≤2%

5. Characteristics Curves

Figure 1 Safe Operating Area

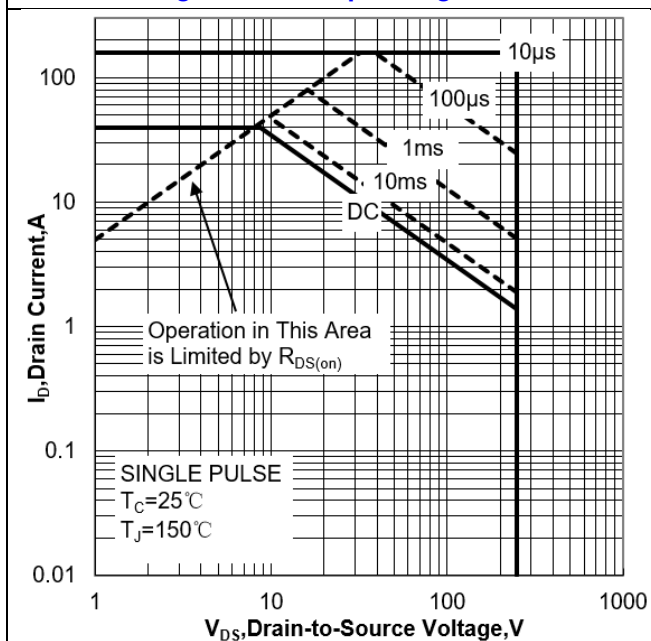


Figure 2 Power Dissipation

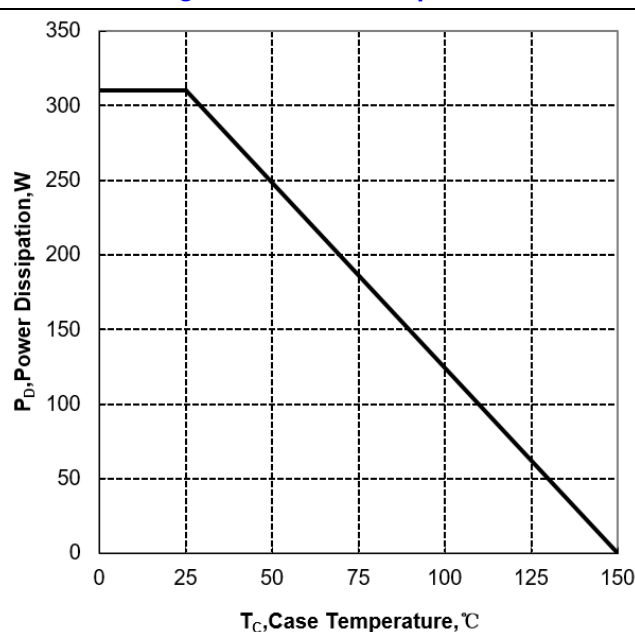


Figure 3 Max Thermal Impedance

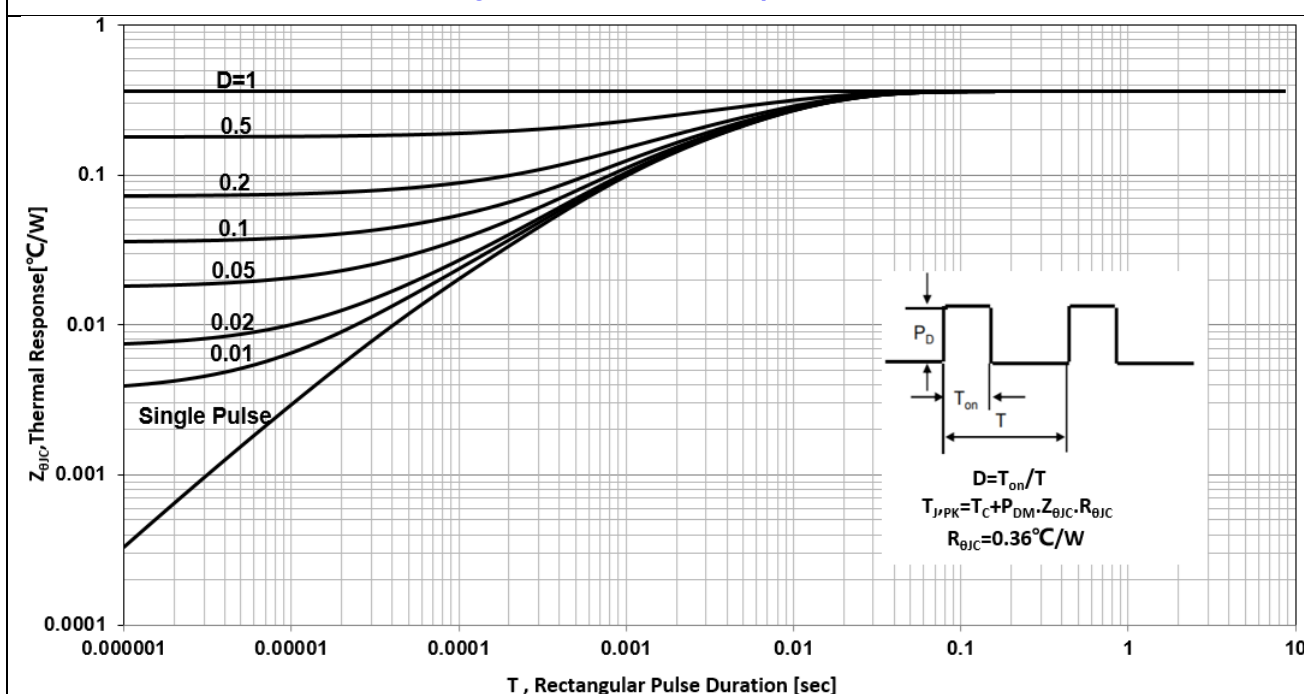


Figure 4 Typical Output Characteristics

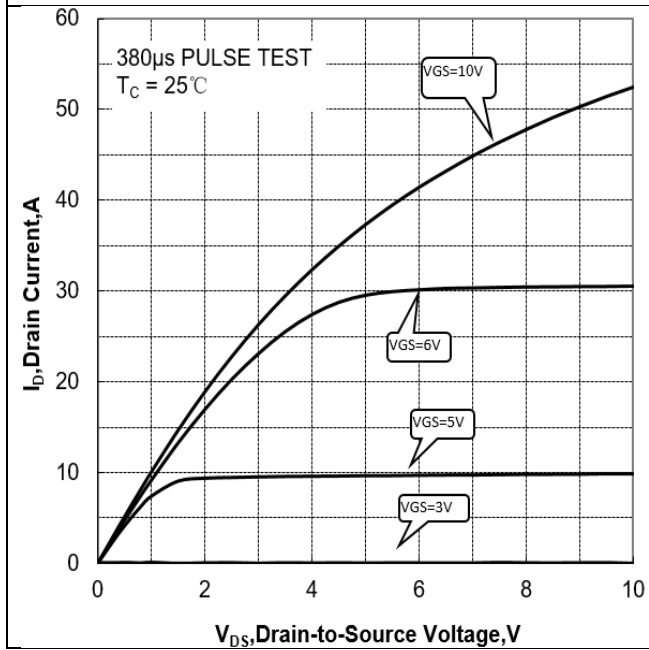


Figure 5 Typical Transfer Characteristics

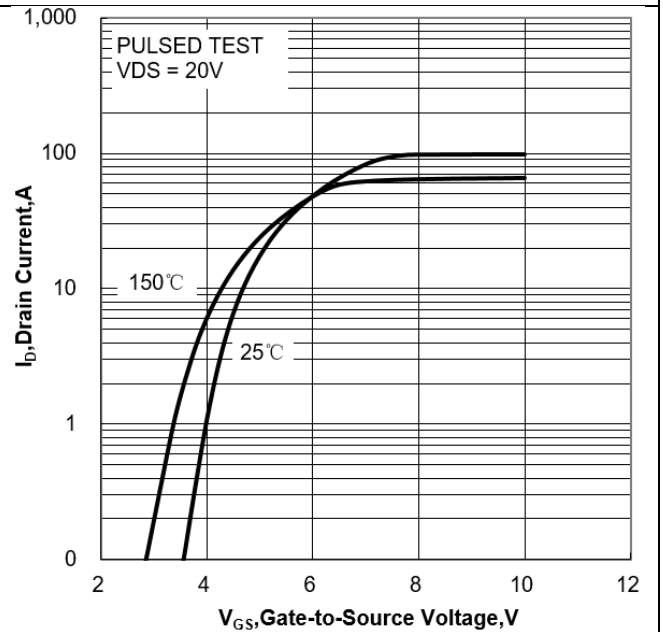


Figure 6 Typical Drain to Source ON Resistance vs Drain Current

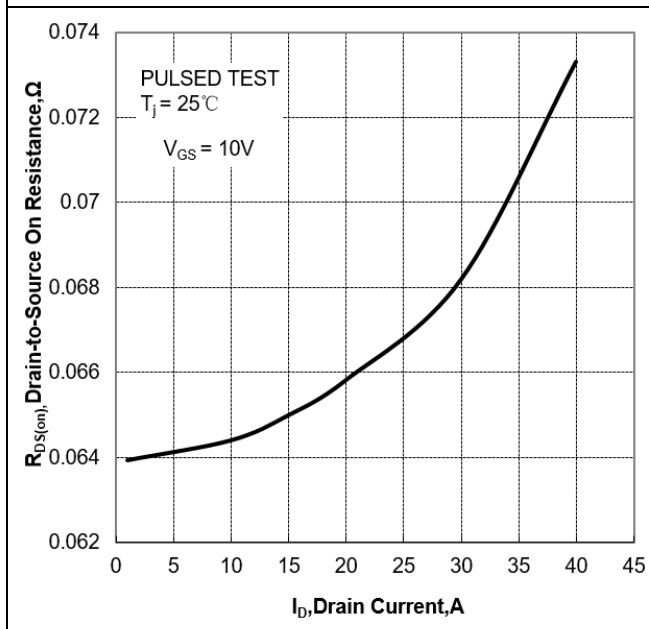


Figure 7 Typical Drain to Source on Resistance vs Junction Temperature

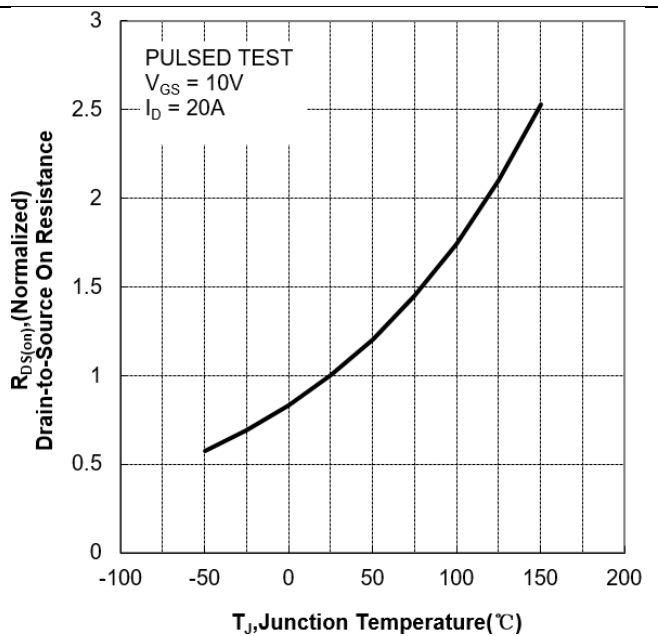


Figure 8 Typical Theshold Voltage vs Junction Temperature

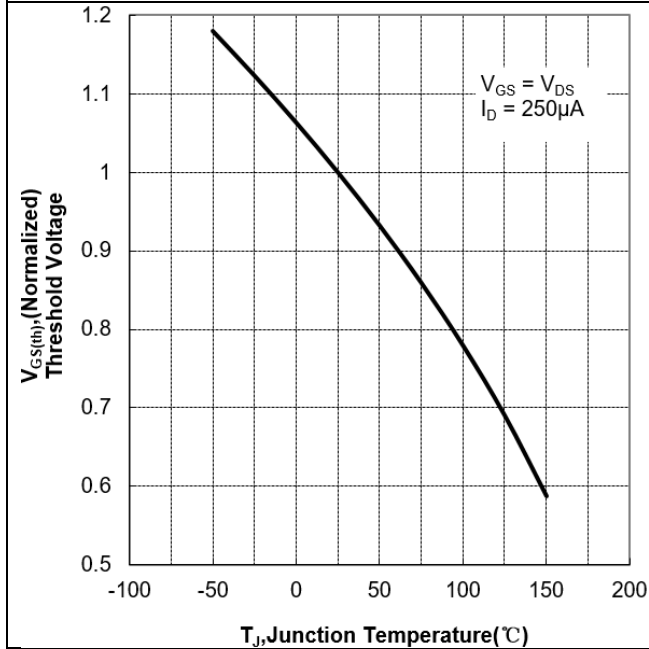


Figure 9 Typical Breakdown Voltage vs Junction Temperature

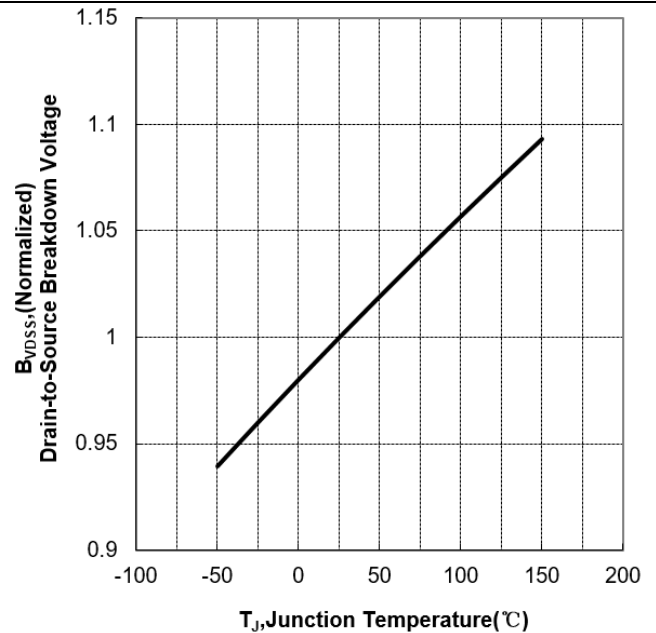


Figure 10 Typical Capacitance vs Drain to Source Voltage






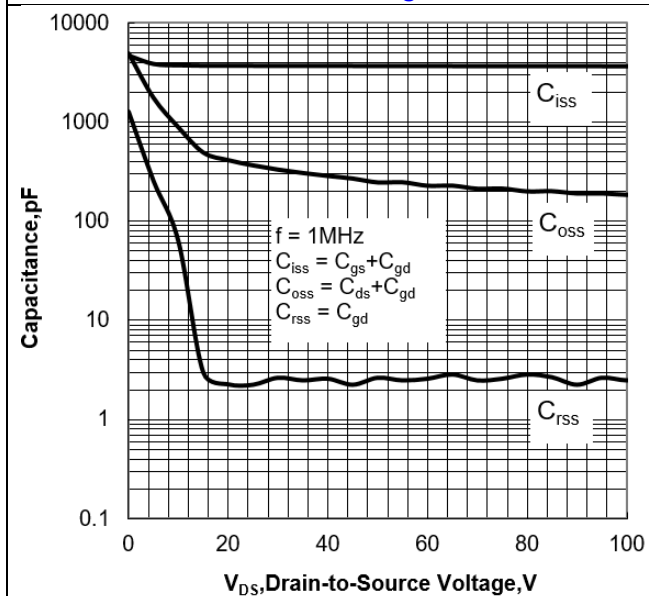



Figure 11 Typical Gate Charge vs Gate to Source Voltage

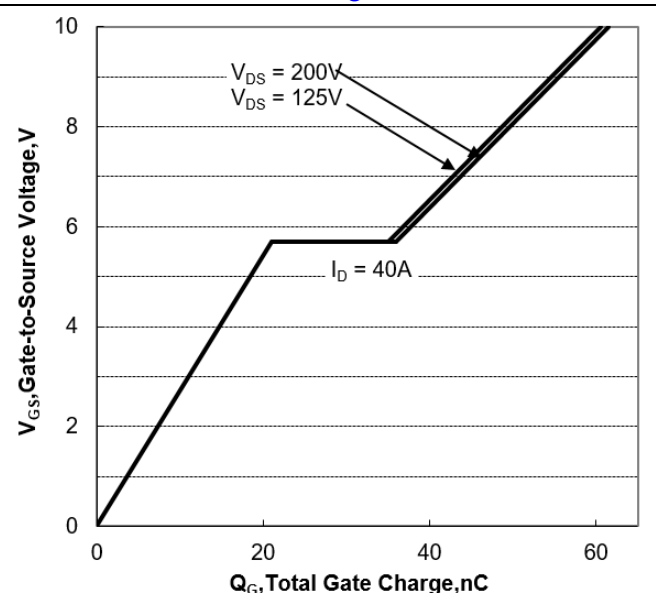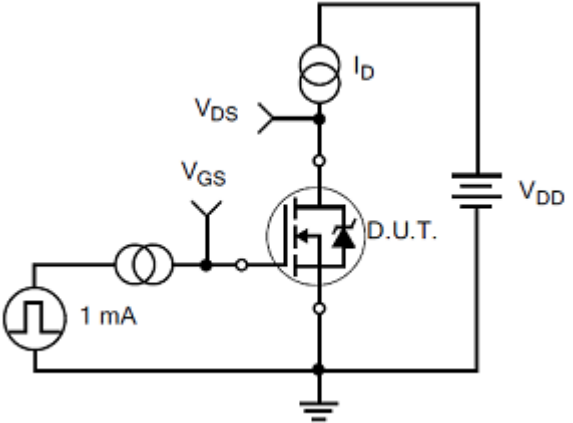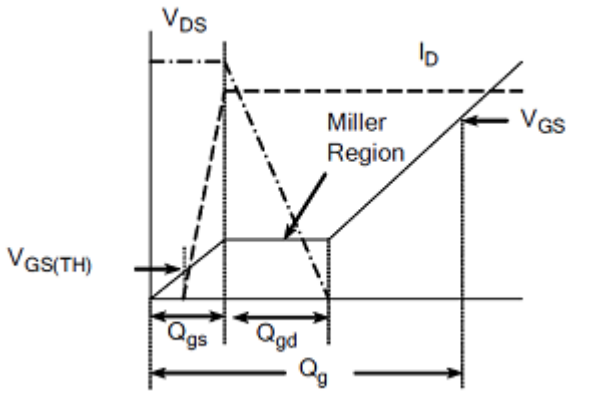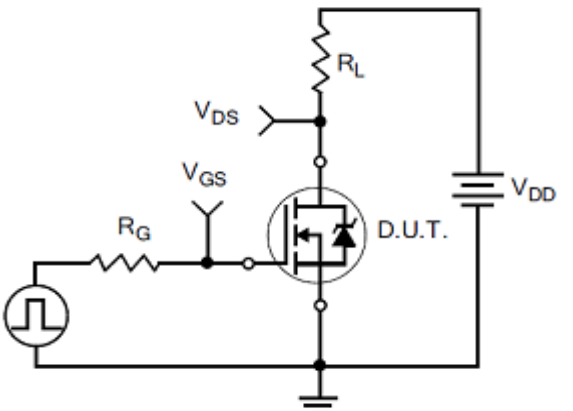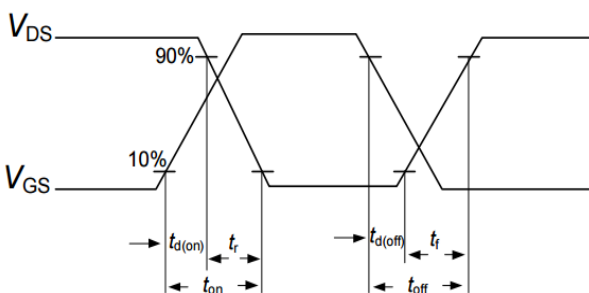


6. Test Circuit and Waveform

Gate Charge Test Circuit	Gate Charge Waveforms
 The diagram shows a MOSFET (D.U.T.) in a common-source configuration. The gate is driven by a 1 mA current source. The drain is connected to a load resistor and a drain current source I_D. The source is connected to ground. The gate voltage is V_{GS} and the drain voltage is V_{DS}. The supply voltage is V_{DD}.	 The diagram shows the relationship between V_{GS} and I_D during switching. The Miller Region is indicated. The gate charge components are Q_{gs}, Q_{gd}, and Q_g. The threshold voltage is $V_{GS(TH)}$.
Resistive Switching Test Circuit	Resistive Switching Waveforms
 The diagram shows a MOSFET (D.U.T.) in a common-source configuration. The gate is driven by a voltage source V_{GS} through a gate resistor R_G. The drain is connected to a load resistor R_L and a supply voltage V_{DD}. The source is connected to ground. The drain voltage is V_{DS}.	 The diagram shows the switching waveforms for V_{DS} and V_{GS}. The turn-on time t_{on} is defined as the time from 10% to 90% of V_{DS} falling. The turn-off time t_{off} is defined as the time from 90% to 10% of V_{DS} rising. The delay times $t_{d(on)}$ and $t_{d(off)}$ are also indicated.


Diode Reverse Recovery Test Circuit

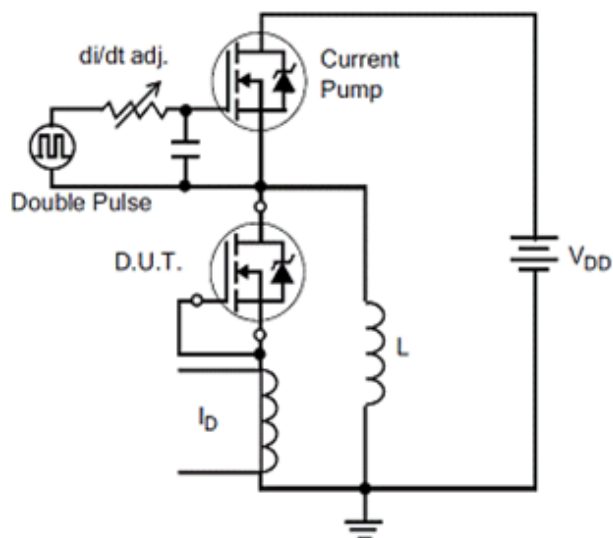


Diode Reverse Recovery Waveform

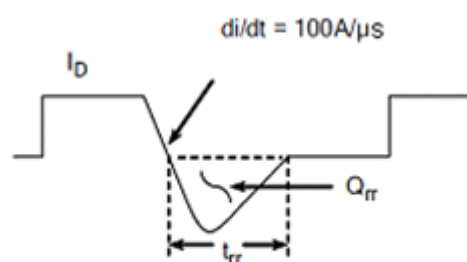


Unclamped Inductive Switching Test Circuit

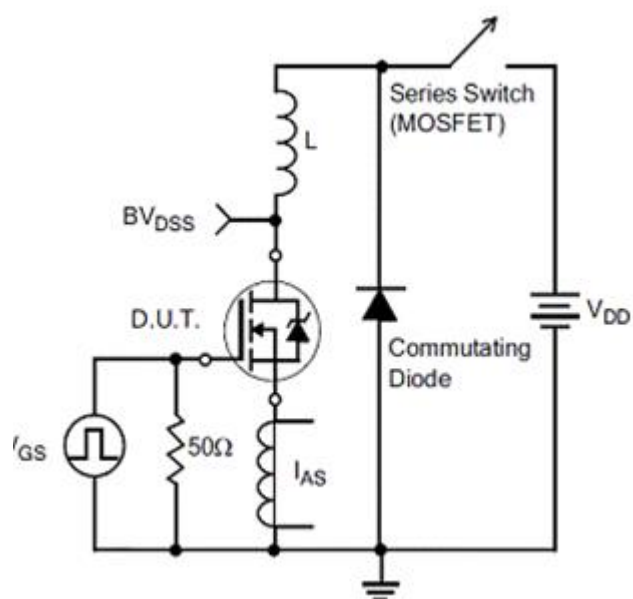

Unclamped Inductive Switching Waveform

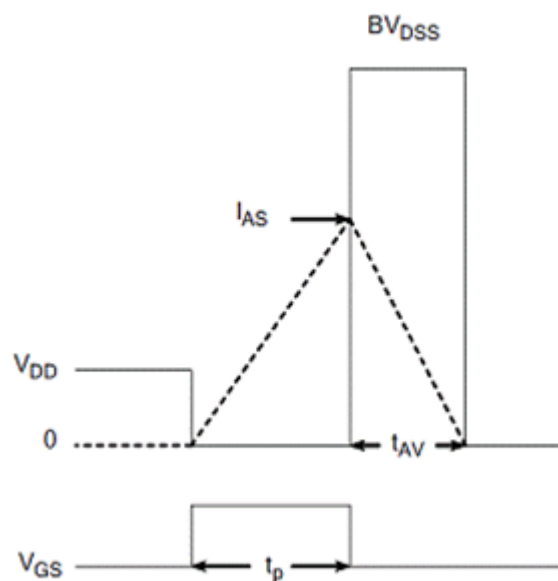


7. Package Description

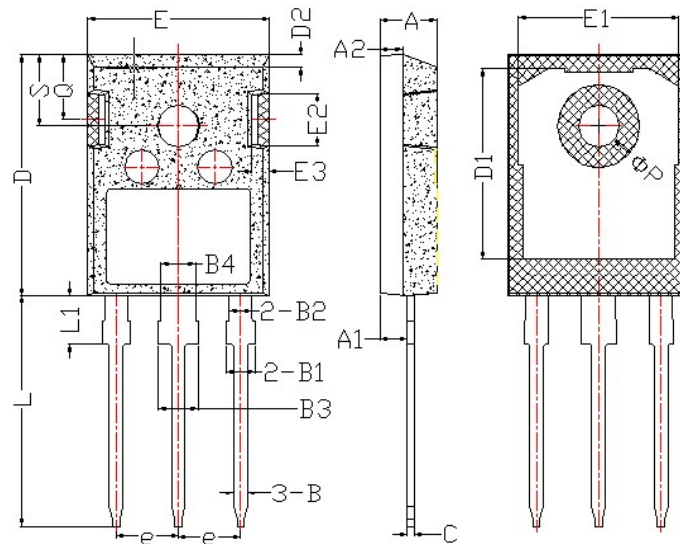

Items	Values(mm)	
	MIN	MAX
A	4.6	5.2
A1	2.2	2.6
B	0.9	1.4
B1	1.75	2.35
B2	1.75	2.15
B3	2.8	3.35
B4	2.8	3.15
C	0.5	0.7
D	20.60	21.30
D1	16	18
E	15.5	16.10
E1	13	14.7
E2	3.80	5.3
E3	0.8	2.60
e	5.2	5.7
L	19	20.5
L1	3.9	4.6
Φ _P	2.5	3.70
Q	5.2	6.00
S	5.8	6.6

TO-247 Package

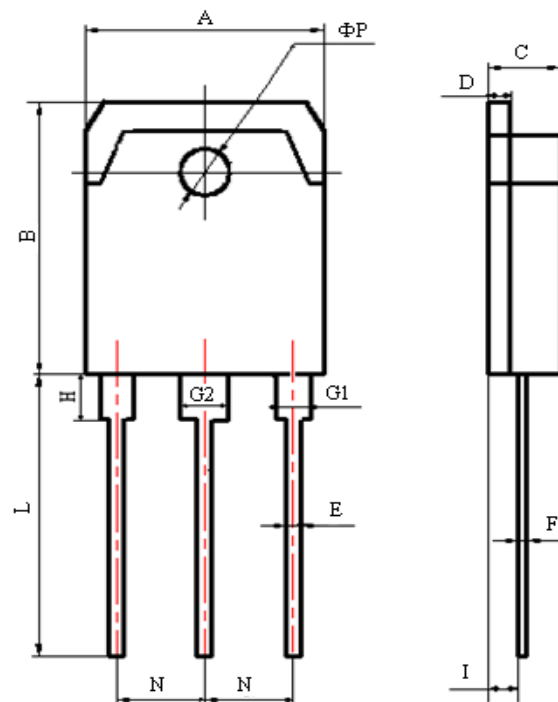

Items	Values(mm)	
	MIN	MAX
A	15.00	16.00
B	19.20	20.60
C	4.60	5.00
D	1.40	1.60
E	0.90	1.10
F	0.50	0.70
G1	2.00	2.20
G2	3.00	3.20
H	3.00	3.70
I	1.20	1.70
	2.70	2.90
L	19.00	21.00
N	5.25	5.65
Φ P	3.10	3.30

TO-3PN Package

NOTE:

1. Exceeding the maximum ratings of the device in performance may cause damage to the device, even the permanent failure, which may affect the dependability of the machine. Please do not exceed the absolute maximum ratings of the device when circuit designing.
2. When installing the heat sink, please pay attention to the torsional moment and the smoothness of the heat sink.
3. MOSFETs is the device which is sensitive to the static electricity, it is necessary to protect the device from being damaged by the static electricity when using it.
4. Shanghai Belling reserves the right to make changes in this specification sheet and is subject to change without prior notice.

CONTACT:**上海贝岭股份有限公司（总部）**

地址：上海市宜山路 810 号

邮编：200233

电话：021-24261000

产品业务咨询及技术支持

电话：021-24261326

传真 2：021-64852222

邮箱 2：marketing@belling.com.cn

上海贝岭深圳分公司（华南区）

地址：深圳市福田区中心区民田路新华保险大厦 1510 室

邮编：518031

电话：0755-33336776 0755-33336770

传真：0755-33336788

上海贝岭北京办事处（华北区）

地址：北京市西城区新华里 16 号院锦官苑小区 10 号楼 1 单元 1505 室

邮编：100044

电话：010-64179374

传真：010-8835 9236